



ZCC Cutting Tools
Europe GmbH



Product Innovations

09/2026

PG9005, PG9020/PG9025, PG1030 PANGU grades – **YCB8 series, YCB226, YZB227** CBN grades
YCD821 PCD grade – **zTurn Poly** PSC tool holders – **zGroove Compact** turning and grooving system
EMP11 square shoulder milling system – **PGMS** series – **UL** series

– EN –

The Company

Zhuzhou Cemented Carbide Cutting Tools Co., Ltd. (ZCC-CT), based in Zhuzhou, China, is the largest Chinese manufacturer of carbide tools. It is also a key company of China Tungsten High-Tech Material Co. Ltd. part of the China Minmetals Corporation.

Since its founding in 1953, ZCC Cutting Tools Co., Ltd. has grown to become one of the world's leading carbide manufacturers with more than 2,000 employees by using the latest technologies and employing highly skilled personnel. The company continuously modernises production technologies and expands its production capacities to enable the company's ongoing growth. As part of Minmetals Corporation, ZCC-CT is able to cover the entire value chain of modern carbide tool production itself, from raw material extraction through to the coated end product and all associated intermediate steps.

By drawing on the latest in European production technology, the company offers products that consistently meet the highest quality standards. Our extensive product range includes carbide/solid carbide, cermet, CBN, PCD and ceramic inserts, carbide tools, tool holders, milling bodies and the accompanying tool systems. All products are consistently produced to accepted international standards, including ISO, DIN, ANSI, JIS and BSI. In addition, ZCC-CT offers customised solutions and special carbide products built to individual specifications.

ZCC-CT invests heavily in research and development. The associated investments go beyond that of most competitors. ZCC Cutting Tools' excellently trained engineers, scientists and a competent, international team, research the necessary fundamentals. These form the basis for the ongoing development of new products and the improvement of existing ones.

The company continuously introduces improvements in quality to meet the customers' ever-increasing demands for new and innovative products and to maximise the benefit of each individual

customer. Both production and administration in China are subject to the ISO 9001:2008 standard, while environmental management is subject to the requirements set out in ISO 14001:2004.

The foundation of the European headquarters of ZCC-CT, ZCC Cutting Tools Europe GmbH and the European central warehouse, both located in Düsseldorf (Germany), dates back to 2003. Today, all European countries as well as the adjacent markets are served from there.

The quality management system of ZCC Cutting Tools Europe GmbH is certified in the area of 'distribution and logistics of metal-working tools' in accordance with ISO 9001:2008.

The Test and Demonstration Centre is available for optimizing customer processes according to individual requirements.

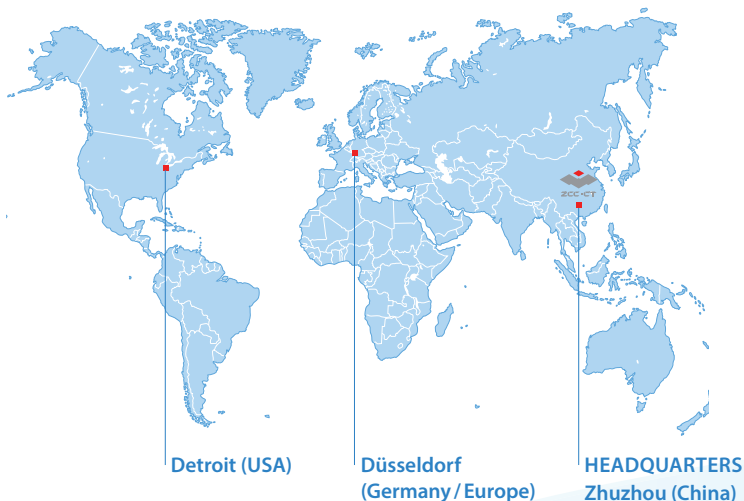
External sales staff and distribution partners in Europe work hand in hand to support customers across the region. Our friendly ZCC-CT application engineers are also available to support you with their expertise and experience by phone, e-mail or in person at your production facility.

The entire field and office sales force is available to answer enquiries from clients across Europe in their native language. Together with employees from the logistics team and with the help of a sophisticated service system, they ensure that all orders are delivered as quickly as possible to you. Branch offices in France and Great Britain add to additional regional proximity to customers.

ZCC Cutting Tools Europe GmbH and all of our employees are there for you and have your back as a competent partner for all matters concerning machining production. This is how we define 'your partner – your value'.



Member of Minmetals Group



This brochure will be presenting the following new products:

Product Innovations 09/2026

GENERAL TURNING

Page



PANGU PG9005 grade – Premium PVD grade for hardened and difficult-to-machine materials

A8



YCB8 grades – Coated CBN series for hardened steel

A20



YCB226 grade – Uncoated CBN grade for cast iron and sintered alloys

A23



YZB227 grade – Uncoated solid CBN grade for rough machining of castings

A24



YCD821 grade – Uncoated PCD grade for non-ferrous metals

A42



zTurn Poly – PSC tool holders for great precision and stability

A66

PARTING & GROOVING

Page



zGroove Compact – Extension: Now also available for axial machining

A76



zGroove Compact – Extension: Now also available as a parting-off solution for CNC production lathes

A82

INDEXABLE MILLING

Page



PANGU PG9005 grade – Premium PVD grade for finishing and for hardened materials

B88



PANGU PG9020 / PG9025 grades – Two high-performance milling grades

B90



EMP11 square shoulder milling system – A cost-effective all-rounder for small parts production

B92

SOLID CARBIDE MILLING

Page



PANGU PGMS series – Extension: Now also available as a barrel cutter

B105

INDEXABLE DRILLS

Page



PANGU PG1030 grade – High-performance grade for drilling in steel

C109

SOLID CARBIDE DRILLS

Page



UL series – Extension: Now also available with 8xD effective length

C114

A glimpse inside: Highlights from previous Product Innovations brochures

Product Innovations 09/2025

GENERAL TURNING

-  **PG8005 grade** – premium grade for maximum wear resistance
-  **PG8030 grade** – premium universal CVD grade for heat resistance
-  **PG1110 grade** – premium heat-resistant PVD grade for turning applications
- LH chip breaker** – consistent results in the medium application range
- F-QF chip breaker (YNT251D grade)** – premium combination for super-finishing
- ISO tool holder (internal cooling)** – optimum temperature control for consistent results every time

PARTING & GROOVING

-  **PG1110 grade** – maximum wear resistance when machining difficult-to-machine materials
-  **PG1120 grade** – maximum reliability even if cutting conditions change
- zGroove Compact** – compact design, easy to work with
- HG chip breaker** – specially designed for soft and difficult-to-machine materials

INDEXABLE MILLING

-  **PG8020 grade** – for high-performance finishing applications involving heat-resistant cast steel
-  **PG8030 grade** – ultra-efficient milling grade for HRSA materials
- EMP08 square shoulder milling system** – efficient and reliable 90° shoulder milling
- EMP10 square shoulder milling system** – maximum feed rates to boost your production
- XMR13 high-feed milling system** – for maximum performance in terms of feed rate and efficiency

SOLID CARBIDE MILLING

-  **PGMS series** – the ideal choice for complex contours

INDEXABLE HEAD DRILLING

- ZTE indexable head drilling system** – reliable drilling results with high material removal rates



[Go to PDF online](#)

Product Innovations 03/2025

INDEXABLE MILLING

- XMR12 high-feed milling system** – Maximum chip removal rates coupled with minimum machining times

SOLID CARBIDE MILLING

- XM-2C series** – Flexible deburring cutter with interchangeable head

SOLID CARBIDE DRILLING

- UL series** – Solid carbide deep hole drills for difficult-to-machine materials



[Go to PDF online](#)

Product Innovations 09/2024

GENERAL TURNING

- QF chip breaker** – Maximum chip control in finishing operations

INDEXABLE MILLING

- SMP09 slot mill cutting system** – Highly versatile tangential milling system

TOOL HOLDERS

- zClamp Hydro hydraulic expansion chucks** – Secure tool clamping for maximum process reliability



[Go to PDF online](#)

General turning

ISO code – general turning inserts

 PG9005 grade

A6–A7

A8–A17

ISO code – PCBN & PCD inserts

YCB8 grades

YCB226 grade

YZB227 grade

YCD821 grade

Recommended cutting data

A18–A19

A20–A41

A23–A41

A24–A41

A42–A61

A62–A63

ISO code – PSC tool holders

zTurn Poly

A64–A65

A66–A74



A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

ISO standard

T N M G 22 04 08 (N) – DM

1 2 3 4 5 6 7 8 9

Insert shape		
A	B	C
D	E	H
K	L	M
O	P	R
S	T	V
W	Z Special	

1

Clearance angle	
A	B
C	D
E	F
G	N
P	O Special

2

Tolerance class			
Code	I.C [mm]	m [mm]	S [mm]
A	±0,025	±0,005	±0,025
C	±0,025	±0,013	±0,025
E	±0,025	±0,025	±0,025
F	±0,013	±0,005	±0,025
G	±0,025	±0,025	±0,130
H	±0,013	±0,013	±0,025
J	±0,05–0,15	±0,005	±0,025
K	±0,05–0,15	±0,013	±0,025
L	±0,05–0,15	±0,025	±0,025
M	±0,05–0,15	±0,08–0,20	±0,130
N	±0,05–0,15	±0,08–0,20	±0,025
U	±0,08–0,25	±0,13–0,38	±0,130


3

Fastening features (metric)	
Insert shape	
A	B
C	F
G	H
J	M
N	Q
R	T
U	W
X Special	


4

Cutting edge length l [mm]								
I.C [mm]	Insert shape							
3,97	06							
5,0	05							
5,56	09							
6,0	06							
6,35	06	07			11	11		
8,0	08							
9,525	09	11	09	09	16	16	06	16
10,0	10							
12,0	12							
12,7	12	15	12	12	22	22	08	
15,875	16		15	15	27			
16,0		19	16					
19,05	19		19	19	33			
20,0	20							
25,0	25	25	25					
25,4			25	25				
31,75			31					
32			32					

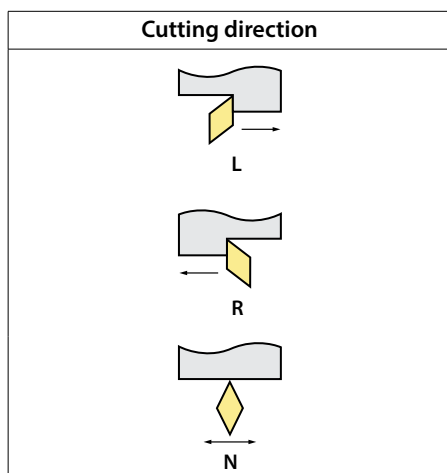
5

Insert thickness S [mm]			
			
Code	S	Code	S
00	0,79	T5	5,95
T0	0,99	06	6,35
01	1,59	T6	6,75
T1	1,98	07	7,94
02	2,38	09	9,52
T2	2,58	T9	9,72
03	3,18	11	11,11
T3	3,97	12	12,70
04	4,76		
T4	4,96		
05	5,56		

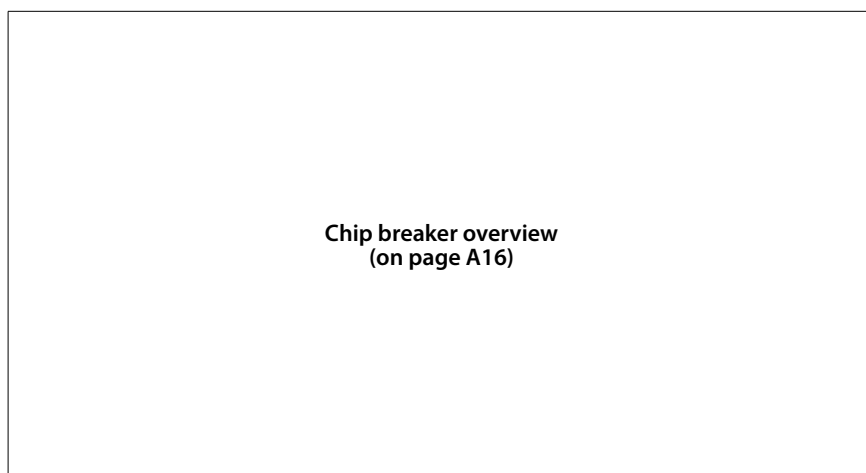
6

Nose radius r [mm]	
	
Code	r
00	–
02	0,2
04	0,4
08	0,8
12	1,2
16	1,6
20	2,0
24	2,4
32	3,2
X	Special
MO	Round inserts

7



8



9

ANSI standard

T	N	M	G	4	3	2	(N)	–	DM
1	2	3	4	5	6	7	8		9

Inner circle		
Code	[mm]	Pouce
2	6.35	0.250
3	9.525	0.375
4	12.7	0.500
5	15.875	0.625
6	19.05	0.750
8	25.4	1.000

5

Insert thickness		
Code	[mm]	Pouce
2	3.18	0.125
3	4.76	0.187
4	6.35	0.250
5	7.94	0.313
6	9.52	0.375

6

Nose radius		
Code	[mm]	Pouce
0	0.2	0.008
1	0.4	0.016
2	0.8	0.031
3	1.2	0.047
4	1.6	0.063
5	2.0	0.079
6	2.4	0.094

7

PG9005 grade



Premium PVD grade for hardened and difficult-to-machine materials

YOUR BENEFITS

- Delivers **sufficient tool life** in the hardness range of 50 to 62 HRC and **significantly reduces the cost per component**
- Ideal for use in combination with difficult-to-machine materials
- Maximum heat resistance for the **longest tool life possible**

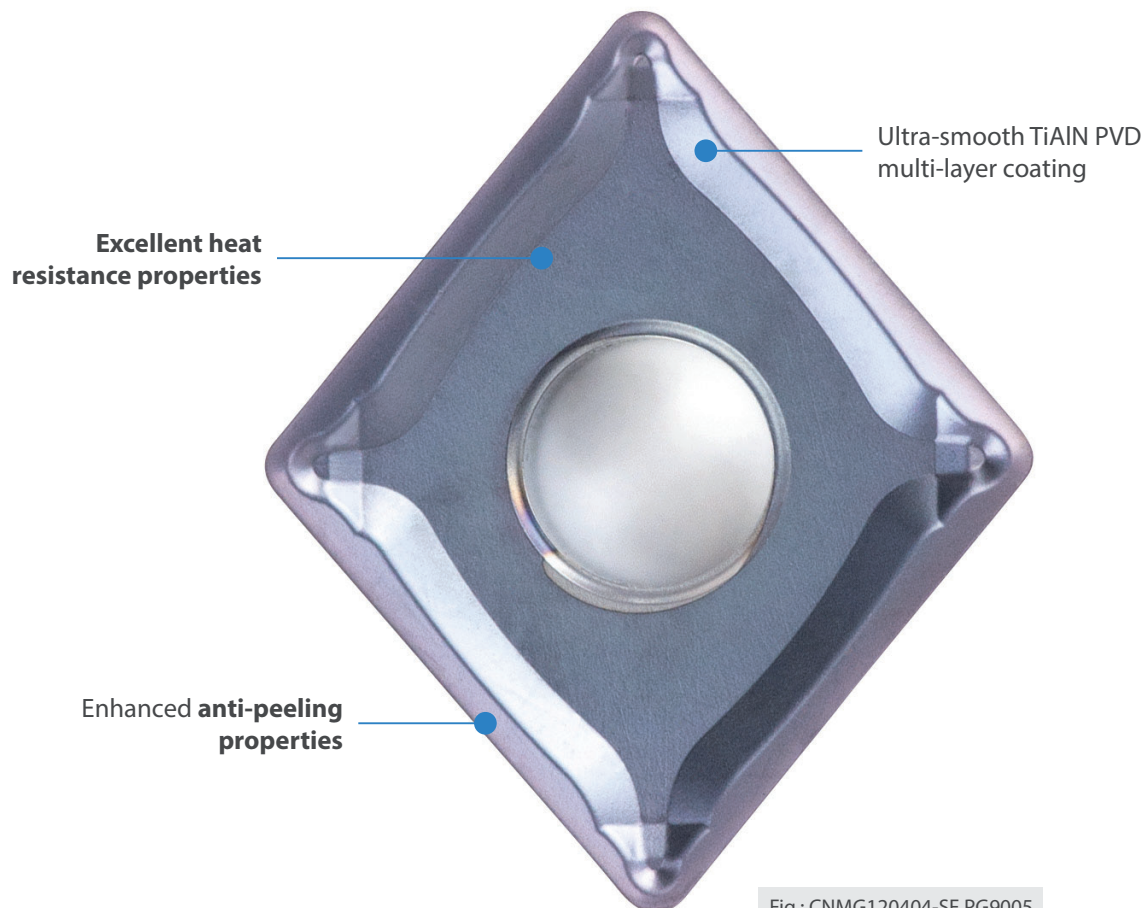



Fig.: CNMG120404-SF PG9005

Turning inserts

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions




CNMG	L	I.C	S	d
12 04	12,9	12,7	4,76	5,16



CN** negative insert				HC ¹ (CVD)				HC ¹ (PVD)	HT	HC ²	HW
				P							
				M							
				K							
				N							
				S				●			
				H				●			
ISO				r	a _p	f		PG9005			
SF 	CNMG120404-SF	0,4	0.1-1.5	0.05-0.30				●			
	CNMG120408-SF	0,8	0.1-1.5	0.10-0.35				●			
	CNMG120412-SF	1,2	0.1-1.5	0.15-0.35				○			

● Ex stock ○ On demand

HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

Tool holders

DCKNR/L	DCLNR/L	PCBNR/L	PCBNR/LC	PCKNR/L	PCLNR/LC	PCLNR/L
Kr: 75°	Kr: 95°	Kr: 75°	Kr: 75°	Kr: 75°	Kr: 95°	Kr: 95°
						

MCBNR/L	MCLNR/L	S***-PCLNR/L
Kr: 75°	Kr: 95°	Kr: 95°
		

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

A

Turning

Turning inserts

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

DNMG	L	I.C	S	d
15 06	15,5	12,7	6,35	5,16

DN** negative insert				HC ¹ (CVD)				HC ¹ (PVD)	HT	HC ²	HW
				P							
				M							
				K							
				N							
				S				●			
				H				●			

ISO				r	a _p	f					PG9005				
SF	DNMG150604-SF	0,4	0.05-0.50	0.05-0.25							●				
	DNMG150608-SF	0,8	0.05-0.50	0.10-0.35							●				
Finishing															

● Ex stock ○ On demand

HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

B

Milling

C

Drilling

Tool holders						
DDJNR/L	PDJNR/LC	PDJNR/L	PDNNR/L	MDJNR/L	MDPNN	S***-PDSNR/L
Kr: 93°	Kr: 93°	Kr: 93°	Kr: 63°	Kr: 93°	Kr: 62°30'	Kr: 62°30'

D

Technical Information

A***-PDUNR/L
Kr: 93°


E

Index

Turning inserts

-  Ideal machining conditions
-  Normal machining conditions
-  Unfavourable machining conditions







SNMG	L	I.C	S	d
12 04	12,7	12,7	4,76	5,16




SN** negative insert				HC ¹ (CVD)				HC ¹ (PVD)	HT	HC ²	HW
				P							
				M							
				K							
				N							
				S							
				H							
ISO				r	a _p	f		PG9005			
SF  Finishing	SNMG120404-SF	0,4	0.05-0.50	0.05-0.20							
	SNMG120408-SF	0,8	0.05-0.50	0.10-0.35							

● Ex stock ○ On demand

HC¹ Coated carbide
 HT Uncoated cermet
 HC² Coated cermet
 HW Uncoated carbide

Tool holders

DSBNR/L	PSBNR/LC	PSBNR/L	PSDNN	PSKNR/L	PSSNR/L	MSBNR/L
Kr: 75°	Kr: 75°	Kr: 75°	Kr: 45°	Kr: 75°	Kr: 45°	Kr: 75°
						

MSRNR/L	MSKNR/L	MSDNN	S***-PSKNR/L
Kr: 75°	Kr: 75°	Kr: 45°	Kr: 75°
			

A

Turning

Turning inserts

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

TN**	L	I.C	S	d
16 04	16,5	9,525	4,76	3,81

TN** negative insert				HC ¹ (CVD)				HC ¹ (PVD)	HT	HC ²	HW
				P							
				M							
				K							
				N							
				S				●			
				H				●			
ISO				r	a _p	f		PG9005			
SF	TNMG160404-SF	0,4	0.05-1.00	0.05-0.30				○			
	TNMG160408-SF	0,8	0.05-1.00	0.10-0.35				●			
Finishing											

● Ex stock ○ On demand

HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

B

Milling

C

Drilling

Tool holders						
DTGNR/L	PTFNR/L	PTTNR/L	PTGNR/L	MTGNR/L	MTJNR/L	MTJNR/L
Kr: 91°	Kr: 91°	Kr: 60°	Kr: 90°	Kr: 90°	Kr: 93°	Kr: 93°
MTFNR/L	S***-PTFNR/L					
Kr: 91°	Kr: 90°					

D

Technical Information

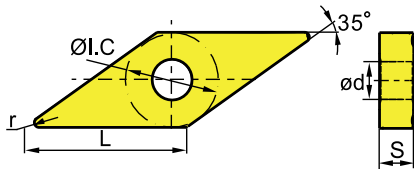
E

Index

Turning inserts

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

VN**	L	I.C	S	d
16 04	16,6	9,525	4,76	3,81

VN** negative insert				HC ¹ (CVD)	HC ¹ (PVD)	HT	HC ²	HW
				P				
				M				
				K				
				N				
				S	●			
				H	●			
ISO					PG9005			
SF	VNMG160404-SF	0,4	0.05-3.00	0.05-0.20	●			
	VNMG160408-SF	0,8	0.05-3.00	0.10-0.30	●			
Finishing								

● Ex stock ○ On demand

HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

Tool holders			
DVVNN	DVJNR/L	MVVNN	MVJNR/L
Kr: 72°30'	Kr: 93°	Kr: 72°30'	Kr: 93°
			


A

Turning

Turning inserts

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

WN**	L	I.C	S	d
08 04	8,7	12,7	4,76	5,16

WN** negative insert		HC ¹ (CVD)	HC ¹ (PVD)	HT	HC ²	HW
	P					
	M					
	K					
	N					
	S		●			
	H		●			

ISO	r	a _p	f		PG9005				
	WNMG080404-SF	0,4	0.1-1.5	0.05-0.30	●				
	WNMG080408-SF	0,8	0.1-1.5	0.10-0.35	●				
	WNMG080408-SF	1,2	0.1-1.5	0.15-0.35	○				
Finishing									

● Ex stock ○ On demand




HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

B

Milling

C

Drilling

Tool holders				
DWLNR/L	PWLNR/LC	PWLNR/L	MWLNR/L	S***-PWLNR/L
Kr: 95°	Kr: 95°	Kr: 95°	Kr: 95°	Kr: 95°
				

D

Technical Information

E

Index

Turning inserts

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

CCGT	L	I.C	S	d
06 02	6,4	6,35	2,38	2,8
09 T3	9,7	9,525	3,97	4,4

CC** positive insert				HC ¹ (CVD)	HC ¹ (PVD)	HT	HC ²	HW
				P				
				M				
				K				
				N				
				S	●			
				H	●			
ISO					PG9005			
SF	CCGT060204-SF	0,4	0.05-2.00	0.05-0.35	●			
	CCGT09T304-SF	0,4	0.05-2.00	0.05-0.35	●			
Finishing								

● Ex stock ○ On demand

HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

Tool holders						
SCACR/L	SCLCR/L	SCACR/L-SC	SCLCR/L-SC	A***-SCLCR/L	S***-SCFCR/L	S***-SCLCR
Kr: 90°	Kr: 95°	Kr: 90°	Kr: 95°	Kr: 95°	Kr: 90°	Kr: 95°

E***-SCLCR/L
Kr: 95°



A

Turning

Turning inserts

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

DCGT	L	I.C	S	d
11 T3	11,6	9,525	3,97	4,4

DC** positive insert				HC ¹ (CVD)				HC ¹ (PVD)	HT	HC ²	HW
				P							
				M							
				K							
				N							
				S				●			
				H				●			

ISO				r	a _p	f	HC ¹ (CVD)				HC ¹ (PVD)	HT	HC ²	HW
	DCGT11T304-SF	0,4	0.05-2.00	0.05-0.20							●			
	DCGT11T308-SF	0,8	0.05-2.00	0.05-0.30							●			
	Finishing													

● Ex stock ○ On demand

HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

C

Drilling

Tool holders						
SDACR/L	SDJCR/L	SDNCN	SDACR/L-SC	SDHCR/L-SC	SDJCR/L-SC	SDNCN-SC
Kr: 90°	Kr: 93°	Kr: 62°30'	Kr: 90°	Kr: 107°30'	Kr: 93°	Kr: 62°30'

D

Technical Information

S***-SDQCR/L	A***-SDUCR/L	S***-SDZCR/L	E***-SDUCR/L	E***-SDQCR/L
Kr: 107°30'	Kr: 93°	Kr: 85°	Kr: 93°	Kr: 107°30'


E

Index

Turning inserts


-  Ideal machining conditions
-  Normal machining conditions
-  Unfavourable machining conditions

TCGT	L	I.C	S	d
11 03	11	6,35	3,18	2,8

TC** positive insert				HC ¹ (CVD)	HC ¹ (PVD)	HT	HC ²	HW
				P				
				M				
				K				
				N				
				S				
				H				
ISO	r	a _p	f					
SF  Finishing	TCGT110304-SF	0,4	0.05-2.00	0.1-0.30				
	TCGT110308-SF	0,8	0.05-2.00	0.1-0.35				

● Ex stock ○ On demand

HC¹ Coated carbide
 HT Uncoated cermet
 HC² Coated cermet
 HW Uncoated carbide

Tool holders	
STGCR/L	E***-STFCR/L
Kr: 91°	Kr: 90°
	

A

Turning

B

Milling

C

Drilling

D

Technical
Information

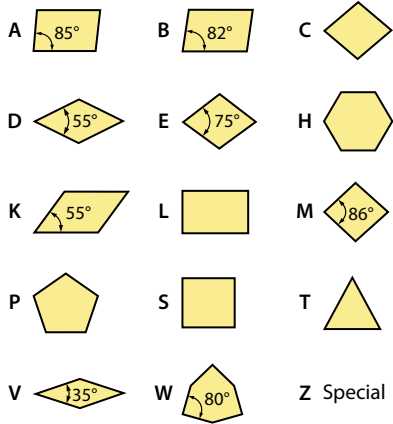
E

Index

C N G A 12 04 08 T 020 20 – 2 (W)

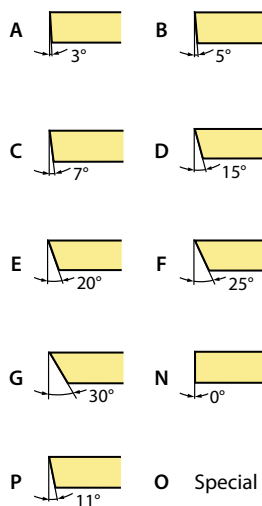
1 2 3 4 5 6 7 8 9 10 11 12

Insert shape




1

Clearance angle



2

Tolerance class

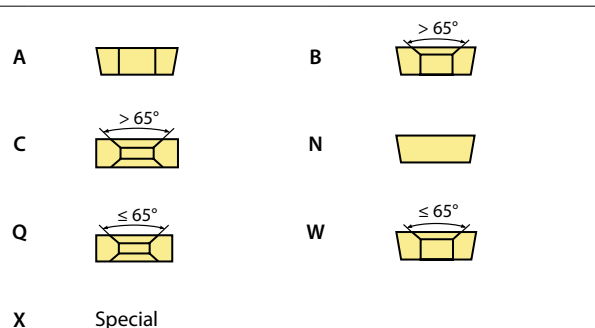


Code	I.C. [mm]	m [mm]	S [mm]
A	±0,025	±0,005	±0,025
C	±0,025	±0,013	±0,025
E	±0,025	±0,025	±0,025
F	±0,013	±0,005	±0,025
G	±0,025	±0,025	±0,130
H	±0,013	±0,013	±0,025
J	±0,05–0,15	±0,005	±0,025
K	±0,05–0,15	±0,013	±0,025
L	±0,05–0,15	±0,025	±0,025
M	±0,05–0,15	±0,08–0,20	±0,130
N	±0,05–0,15	±0,08–0,20	±0,025
U	±0,08–0,25	±0,13–0,38	±0,130

3

Fastening features (metric)

Insert shape





4


Cutting edge length l [mm]

I.C. [mm]	Insert shape					
	C	D	S	T	V	W
3,97	06					
5,0						
5,56	09					
6,0						
6,35	06	07		11	11	
8,0						
9,525	09	11	09	16	16	06
10,0						
12,0						
12,7	12	15	12	22	22	08
15,875	16		15	27		
16,0	19					
19,05	19		19	33		
20,0						
25,0	25	25				
25,4	25					
31,75						
32						

5

Insert thickness S [mm]			
			
Code	S	Code	S
02	2,38	06	6,35
T2	2,58	T6	6,75
03	3,18	07	7,94
T3	3,97	09	9,52
04	4,76	T9	9,72
T4	4,96	11	11,11
05	5,56	12	12,70
T5	5,95		


6

Nose radius r [mm]	
	
Code	r
00	–
02	0,2
04	0,4
08	0,8
12	1,2
16	1,6
20	2,0
24	2,4
32	3,2
X	Special
MO	Round inserts

7

Cutting edge profile		
Code	Cutting edge	Insert shape
E	Rounding	
F	Sharp edge	
T	Chamfer	
S	Chamfer + Rounding	

8

Chamfer width b [mm]	
	
Code	b
010	0,10
015	0,15
020	0,20
025	0,25
030	0,30
035	0,35
040	0,40
045	0,45
050	0,50
100	1,00
200	2,00

9

Chamfer angle α	
	
Code	α
05	5°
10	10°
15	15°
20	20°
25	25°
30	30°

10

Cutting edges	
Code	Form
1	
2	
3	
4	

11

Extra	
Code	Description
W	Wiper
HS	Full face single brazed CBN insert
M	Solid CBN with clamping dimple
CM	Chip breaker (CBN)
CL	Chip breaker (CBN)
CS	Chip breaker (CBN)
MED	Chip breaker, fine – medium (PCD)
L (L/R)	Full-edge tipped (PCD)

12

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

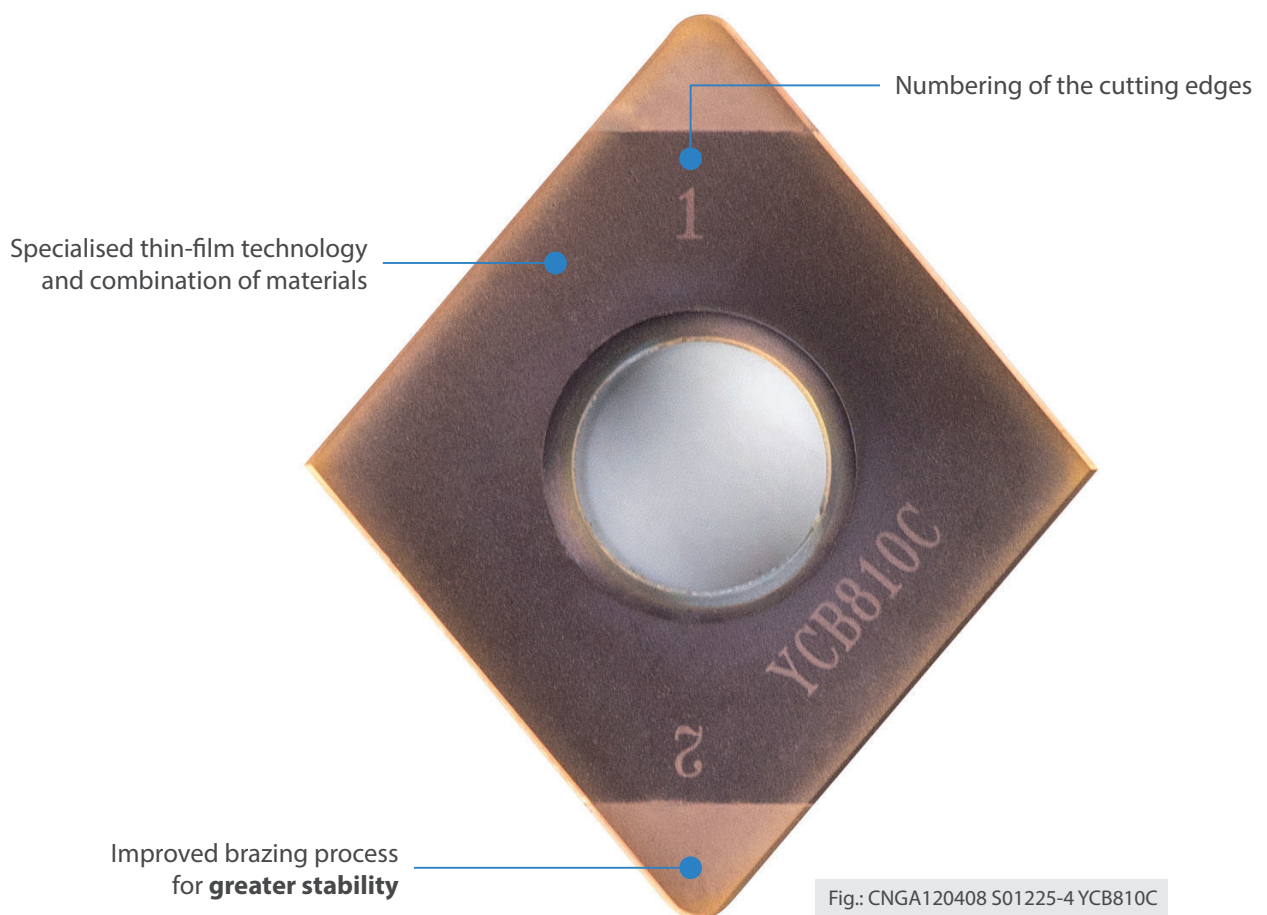
Index

YCB8 grades

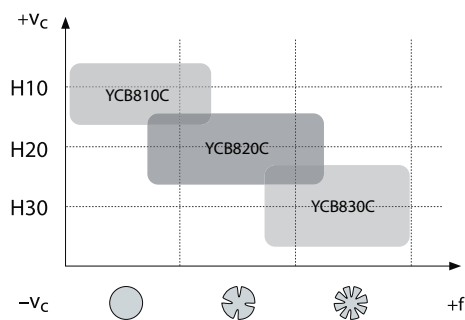
Coated CBN series for hardened steel

YOUR BENEFITS

- The latest CBN materials and coating processes for **long tool life**
- High-precision manufacturing for **stable and reliable processes**
- A wide range of cost-effective inserts
- Ideal for **mass production**
- **Versatile hard turning applications**



Grades



YCB810C (wear-resistant)

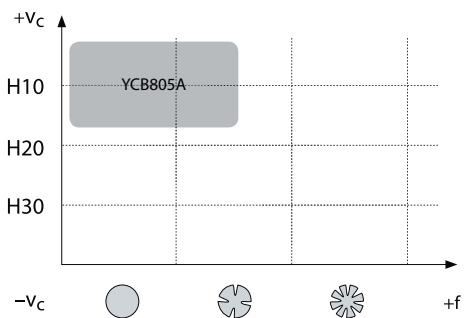
- High-speed machining
- Smooth cut to slightly interrupted cut

YCB820C (all-rounder)

- Smooth cut to medium-length interrupted cut
- For a wide range of applications

YCB830C (robust)

- For unstable conditions and heavily interrupted cuts
- A good balance between wear resistance and toughness



YCB805A (specialist)

- High-precision grade for smooth cutting
- For good surface quality and tolerances

Chamfer designs

The design of the cutting edge is crucial to the Tool life and performance of the cutting insert. Our 'standard version' covers a wide range of applications. In all other cases, we can offer an optimised edge design to achieve the best possible result.

Standard

S01225

S01225

- A range of products for a wide variety of applications

Optional

E

E

- Rounded cutting edges for minimised cutting forces and vibrations
- Good tolerance and surface quality

S00515

S00515

- Minimal edge preparation for low cutting forces (to prevent burr formation)
- Also ideal for internal machining

S01835

S01835

- Large-edge preparation for heavily interrupted cuts or unstable conditions

Chip breakers

-CM



- General machining of surface layers (hard-soft machining)
- Reliable chip breaking prevents chip build-up

Feed rate $f = 0.1\text{--}0.3\text{ mm}$
Depth of cut $a_p = 0.15\text{--}0.4\text{ mm}$

-CL



- Easy machining in hardened edge zones with a cutting depth of less than 0.3 mm
- For medium allowances

Feed rate $f = 0.1\text{--}0.25\text{ mm}$
Depth of cut $a_p = 0.1\text{--}0.3\text{ mm}$

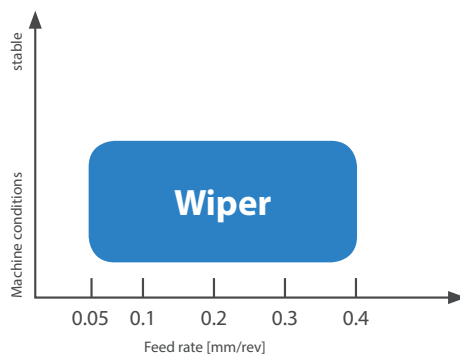
-CS



- Fine machining with low cutting forces and to minimise vibrations when machining hard and soft materials
- For minimal allowances

Feed rate $f = 0.06\text{--}0.2\text{ mm}$
Depth of cut $a_p = 0.06\text{--}0.2\text{ mm}$

CBN with wiper chamfer



Two ways to optimise the machining process:

- Achieving a **better surface quality** at the same feed rate as with conventional indexable inserts
- Increased efficiency thanks to **higher feed rates** whilst maintaining the same surface quality as with conventional indexable inserts.

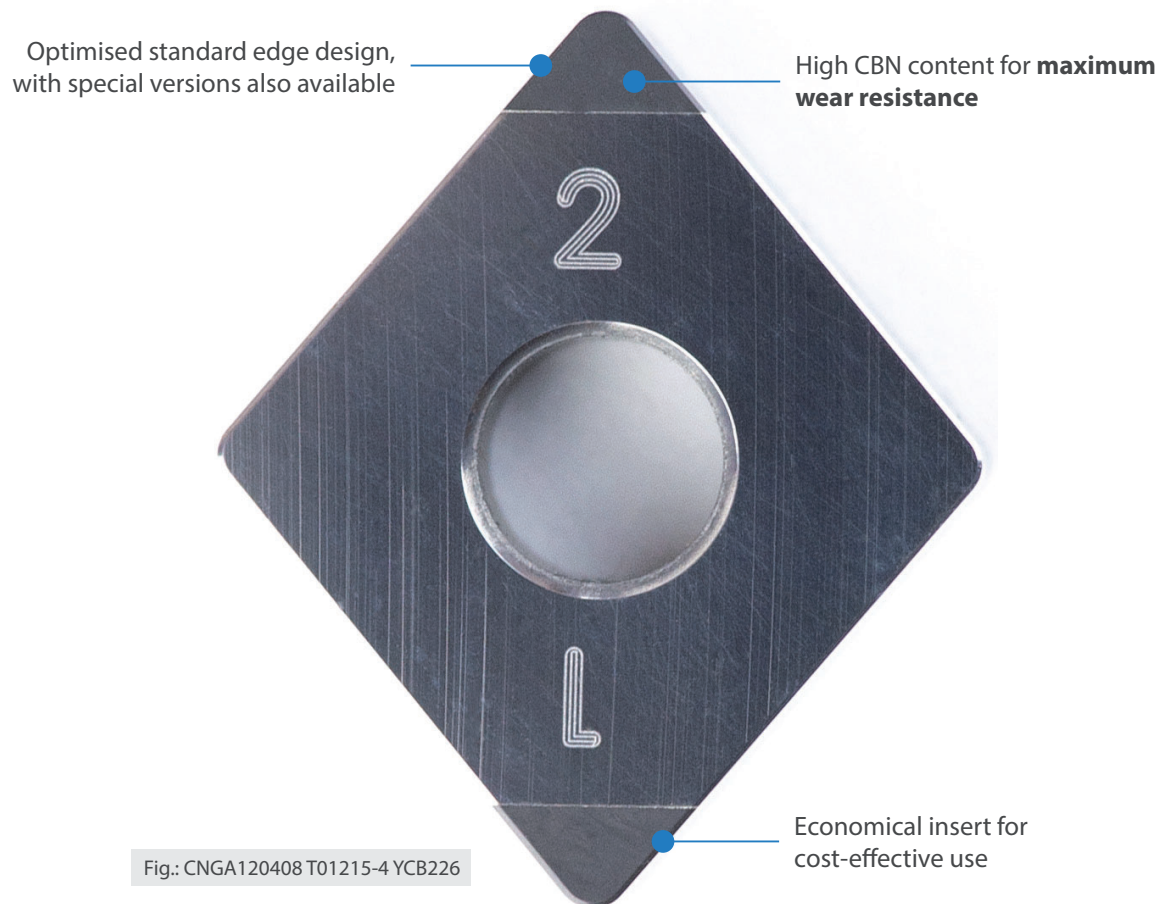
Suitable for use under stable machine conditions and for machining without contouring.

YCB226 grade

Uncoated CBN grade for cast iron and sintered alloys

YOUR BENEFITS

- The latest-generation grade with a high CBN content for long tool life
- Grade with **high wear resistance** for abrasive materials
- A wide range of cost-effective inserts

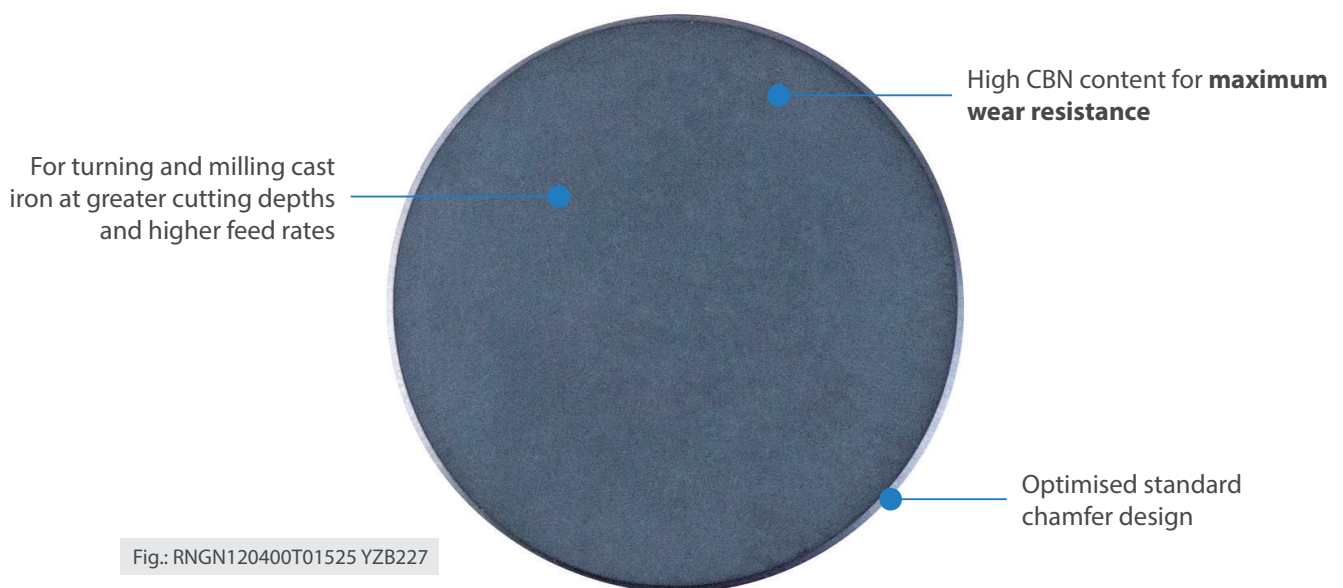


YZB227 grade

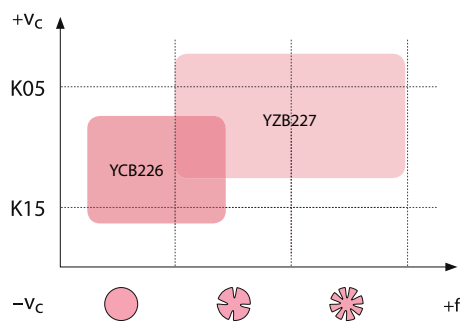
Uncoated solid CBN grade for rough machining of castings

YOUR BENEFITS

- Solid CBN grade for rough machining at **high cutting speeds**
- Grade with **high wear resistance** for abrasive materials
- **Economical** under unstable conditions for **high removal rates** and **interrupted cutting**
- For **high process reliability** in high-speed machining at speeds of up to v_c 1400 m/min



Grades



YCB226 (soldered, uncoated)

- Fine to semi-finishing of cast materials
- Good wear resistance and thermal conductivity

YZB227 (uncoated)

- Semi-finishing of grey cast iron, ductile cast iron and Ni/Cr-based alloys, including with a slightly interrupted cut
- Good wear resistance and thermal conductivity

Chamfer designs

The design of the cutting edge is crucial to the Tool life and performance of the cutting insert. Our 'standard version' covers a wide range of applications. In all other cases, we can offer an optimised edge design to achieve the best possible result.

Standard

T01525

T01525

- For YZB227 inserts
- A range of products for a wide variety of applications

T01215

T01215

- For YCB226 inserts
- A range of products for a wide variety of applications

Optional

Other cutting edge designs, such as E-chamfers for easier cutting and improved surface finish, or S-chamfer variants for greater stability, are available on demand.



Clamping groove

Optionally available with a clamping groove for greater stability at very high cutting speeds. Other shapes are available on demand.


A

Turning

Turning inserts (CBN)

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

CNGA	L	I.C	S	d
12 04	12,9	12,7	4,76	5,5

CN** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H	○	○	○	○	○	○	○
ISO				r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C	YCB226
	CNGA120402S01225-4	0,2	0,05-0,2	0,02-0,1	○	○					
	CNGA120404S01225-4	0,4	0,05-0,3	0,04-0,2	○	●	○				
	CNGA120408S01225-4	0,8	0,1-0,5	0,08-0,4	●	●	●	●			
	CNGA120412S01225-4	1,2	0,12-0,6	0,12-0,6	●	●	●	●			
	CNGA120416S01225-4	1,6	0,15-0,7	0,12-0,7	○	○	○	○			
	CNGA120408T01215-4	0,8	0,1-0,5	0,08-0,4							●
	CNGA120412T01215-4	1,2	0,12-0,6	0,12-0,6							●
	CNGA120416T01215-4	1,6	0,15-0,7	0,12-0,7							○
	CNGA120408S01215-4W	0,8	0,06-0,3	0,08-0,4	○	○	○	○			
	CNGA120412S01215-4W	1,2	0,08-0,35	0,08-0,4	○	○	○	○			
	CNGA120404S00535-4 CL	0,4	0,1-0,25	0,1-0,3	○	○					
	CNGA120408S00535-4 CL	0,8	0,1-0,25	0,1-0,3	○	○					
	CNGA120404S01235-4 CM	0,4	0,15-0,4	0,1-0,3	○	○					
	CNGA120408S01235-4 CM	0,8	0,15-0,4	0,1-0,3	○	○					

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

B

Milling

C




Drilling

D

Technical Information

E

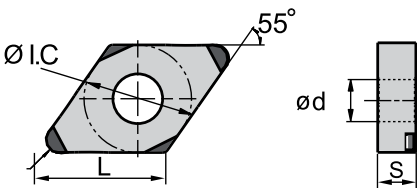
Index

Tool holders					
DCLNR/L	PCBNR/L	PCLNR/L	MCBNR/L	MCLNR/L	S***-PCLNR/L
Kr: 95°	Kr: 75°	Kr: 95°	Kr: 75°	Kr: 95°	Kr: 95°
					

Turning inserts (CBN)





-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

DNGA	L	I.C	S	d
11 04	11,6	9,525	4,76	3,81
15 06	15,5	12,7	6,35	5,16

DN** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H	  						
ISO	r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C			YCB226	
	DNGA110404S01225-4	0,4	0,05-0,3	0,04-0,2	○ ○						
	DNGA110408S01225-4	0,8	0,1-0,5	0,08-0,4	○ ○ ○						
	DNGA150604S01225-4	0,4	0,05-0,3	0,04-0,2	○ ○ ○						
	DNGA150608S01225-4	0,8	0,1-0,5	0,08-0,4	● ● ● ●						
	DNGA150612S01225-4	1,2	0,12-0,6	0,12-0,6	○ ● ● ●						
	DNGA150608T01215-4	0,8	0,1-0,5	0,08-0,4						●	
	DNGA150612T01215-4	1,2	0,12-0,6	0,12-0,6						●	
	DNGA150608S01215-4W	0,8	0,06-0,3	0,08-0,4	○ ○ ○						
	DNGA150604S00535-4 CL	0,4	0,1-0,25	0,1-0,3	○ ○						
	DNGA150608S00535-4 CL	0,8	0,1-0,25	0,1-0,3	○ ○						
	DNGA150604S01235-4 CM	0,4	0,15-0,4	0,1-0,3	○ ○						
	DNGA150608S01235-4 CM	0,8	0,15-0,4	0,1-0,3	○ ○						

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

Tool holders						
DDJNR/L	PDJNR/L	PDNNR/L	MDJNR/L	MDPNN	S***-PDSNR/L	S***-PDUNR/L
Kr: 93°	Kr: 93°	Kr: 63°	Kr: 93°	Kr: 62°30'	Kr: 62°30'	Kr: 93°
						

A

Turning

Turning inserts (CBN)

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

SNGA	L	I.C	S	d
12 04	12,7	12,7	4,76	5,16

SN** negative insert					BC (CBN)				BH (CBN)			
					P							
					M							
					K							
					N							
					S							
					H	○	○	○	○			
ISO					r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C	YCB226
	SNGA120408S01225-4				0,8	0,1-0,5	0,08-0,4	○	○	○		
	SNGA120412S01225-4				1,2	0,12-0,6	0,12-0,6	○	○	○		
	SNGA120408T01215-4				0,8	0,1-0,5	0,08-0,4				○	
	SNGA120412T01215-4				1,2	0,12-0,6	0,12-0,6				○	

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

B

Milling

C










Drilling

D

Technical Information

E


Index

Tool holders						
DSBNR/L	PSBNR/L	PSDNN	PSKNR/L	PSSNR/L	MSBNR/L	MSRNR/L
Kr: 75°	Kr: 75°	Kr: 45°	Kr: 75°	Kr: 45°	Kr: 75°	Kr: 75°
						
MSKNR/L	MSDNN	S***-PSKNR/L				
Kr: 75°	Kr: 45°	Kr: 75°				
						

Turning inserts (CBN)









-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

TNGA	L	I.C	S	d
16 04	16,5	12,7	4,76	5,5

TN** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H	  						
ISO	r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C			YCB226	
	TNGA160404S01225-3	0,4	0,05-0,3	0,04-0,2	○ ○						
	TNGA160408S01225-3	0,8	0,1-0,5	0,08-0,4	○ ● ● ○						
	TNGA160412S01225-3	1,2	0,12-0,6	0,12-0,6	○ ● ● ○						
	TNGA160408T01215-3	0,8	0,1-0,5	0,08-0,4						○	
	TNGA160412T01215-3	1,2	0,12-0,6	0,12-0,6						○	
	TNGA160404S00535-3 CL	0,4	0,1-0,25	0,1-0,3	○ ○						
	TNGA160408S00535-3 CL	0,8	0,1-0,25	0,1-0,3	○ ○						
	TNGA160404S01235-3 CM	0,4	0,15-0,4	0,1-0,3	○ ○						
	TNGA160408S01235-3 CM	0,8	0,15-0,4	0,1-0,3	○ ○						

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

Tool holders						
DTGNR/L	PTFNR/L	PTTNR/L	PTGNR/L	MTGNR/L	MTJNR/L	MTJNR/L-Z
Kr: 91°	Kr: 91°	Kr: 60°	Kr: 90°	Kr: 90°	Kr: 93°	Kr: 93°
						
MTFNR/L	S***-PTFNR/L					
Kr: 91°	Kr: 90°					
						

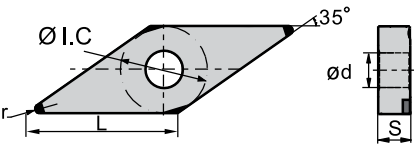
A

Turning

Turning inserts (CBN)

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

VNGA	L	I.C	S	d
16 04	16,5	12,7	4,76	5,5

VN** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H	○	○	○	○	○	○	○

B

Milling

ISO		r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C	YCB226			
	VNGA160404S01225-4	0,4	0,05-0,3	0,04-0,2	●	●						
	VNGA160408S01225-4	0,8	0,1-0,5	0,08-0,4	○	●	○					
	VNGA160412S01225-4	1,2	0,12-0,6	0,12-0,6	●	●	○					
	VNGA160408T01215-4	0,8	0,1-0,5	0,08-0,4					○			
	VNGA160412T01215-4	1,2	0,12-0,6	0,12-0,6					○			
	VNGA160404S00535-4 CL	0,4	0,1-0,25	0,1-0,3	○	○						
	VNGA160408S00535-4 CL	0,8	0,1-0,25	0,1-0,3	○	○						

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

C

Drilling

Tool holders			
DVVNN	DVJNR/L	MVVNN	MVJNR/L
Kr: 72°30'	Kr: 93°	Kr: 72°30'	Kr: 93°
			

D

Technical Information


E

Index

Turning inserts (CBN)




-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

WNGA	L	I.C	S	d
08 04	8,69	12,7	4,76	5,16

WN** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H	  						
ISO	r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C		YCB226		
	WNGA080404S01225-3	0,4	0,05-0,3	0,04-0,2	○ ○						
	WNGA080408S01225-3	0,8	0,1-0,5	0,08-0,4	○ ○ ○ ○						
	WNGA080412S01225-3	1,2	0,12-0,6	0,12-0,6	○ ○ ○ ○						
	WNGA080416S01225-3	1,6	0,15-0,7	0,12-0,7	○ ○ ○ ○						
	WNGA080408T01215-3	0,8	0,1-0,5	0,08-0,4					○		
	WNGA080412T01215-3	1,2	0,12-0,6	0,12-0,6					○		
	WNGA080416T01215-3	1,6	0,15-0,7	0,12-0,7					○		

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

Tool holders			
DWLNRL/L	PWLNRL/L	MWLNRL/L	S***-PWLNRL/L
Kr: 95°	Kr: 95°	Kr: 95°	Kr: 95°
			

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

Turning inserts (CBN)

CCGW	L	I.C	S	d
06 02	6,4	6,35	2,38	2,8
09 T3	9,7	9,525	3,97	4,4
12 04	12,9	12,7	4,76	5,5

CC** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H	○	○	○	○	○	○	○
ISO	r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C			YCB226	
	CCGW060202S01225-2	0,2	0,05-0,2	0,02-0,1	○						
	CCGW060204S01225-2	0,4	0,05-0,3	0,04-0,2	● ○						
	CCGW060208S01225-2	0,8	0,1-0,5	0,08-0,4	● ●						
	CCGW060204T01215-2	0,4	0,05-0,3	0,04-0,2						○	
	CCGW060208T01215-2	0,8	0,1-0,5	0,08-0,4						○	
	CCGW09T302S01225-2	0,2	0,05-0,2	0,02-0,1	○						
	CCGW09T304S01225-2	0,4	0,05-0,3	0,04-0,2	○ ● ●						
	CCGW09T308S01225-2	0,8	0,1-0,5	0,08-0,4	○ ● ● ○						
	CCGW09T304T01215-2	0,4	0,05-0,3	0,04-0,2						●	
	CCGW09T308T01215-2	0,8	0,1-0,5	0,08-0,4						●	
	CCGW09T304S01215-2W	0,4	0,05-0,3	0,07-0,35	○ ○						
	CCGW09T308S01215-2W	0,8	0,06-0,3	0,08-0,4	○ ○ ○						
	CCGW09T304E-2 CS	0,4	0,08-0,2	0,08-0,2	○						
	CCGW09T308E-2 CS	0,8	0,08-0,2	0,08-0,2	○						
	CCGW09T304S00535-2 CL	0,4	0,1-0,25	0,1-0,3	○ ○						
	CCGW09T308S00535-2 CL	0,8	0,1-0,25	0,1-0,3	○ ○						

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

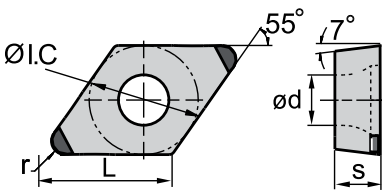
Tool holders						
SCACR/L	SCLCR/L	SCACR/L-SC	SCLCR/L-SC	A***-SCLCR/L	S***-SCFCR/L	S***-SCLCR
Kr: 90°	Kr: 95°	Kr: 90°	Kr: 95°	Kr: 95°	Kr: 90°	Kr: 95°

E***-SCLCR/L
Kr: 95°

Turning inserts (CBN)

-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

DCGW	L	I.C	S	d
07 02	7,8	6,35	2,38	2,8
11 T3	11,6	9,525	3,97	4,4








DC** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H							
ISO	r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C	YCB226			
	DCGW070202S01225-2	0,2	0,05-0,2	0,02-0,10	○						
	DCGW070204S01225-2	0,4	0,05-0,3	0,04-0,20	○ ○ ○						
	DCGW070208S01225-2	0,8	0,1-0,5	0,08-0,40	○ ○ ○						
	DCGW11T302S01225-2	0,2	0,05-0,2	0,02-0,10	○						
	DCGW11T304S01225-2	0,4	0,05-0,3	0,04-0,20	○ ● ● ○						
	DCGW11T308S01225-2	0,8	0,1-0,5	0,08-0,40	○ ● ● ○						
	DCGW11T312S01225-2	1,2	0,12-0,6	0,12-0,6	○ ○ ○ ○						
	DCGW11T304T01215-2	0,4	0,05-0,3	0,04-0,20				○			
	DCGW11T308T01215-2	0,8	0,1-0,5	0,08-0,40				●			
	DCGW11T312T01215-2	1,2	0,12-0,6	0,12-0,6				●			
	DCGW11T304S01215-2W	0,4	0,05-0,3	0,07-0,25	○ ○ ○						
	DCGW11T308S01215-2W	0,8	0,06-0,3	0,08-0,30	○ ● ○						
	DCGW11T304E-2 CS	0,4	0,08-0,2	0,08-0,2	○						
	DCGW11T308E-2 CS	0,8	0,08-0,2	0,08-0,2	○						
	DCGW11T304S00535-2 CL	0,4	0,1-0,25	0,1-0,3							
	DCGW11T308S00535-2 CL	0,8	0,08-0,4	0,08-0,50	○ ○ ○						


● Ex stock ○ On demand

BC CBN with coating

BH CBN with a high CBN content

Tool holders

SDACR/L	SDJCR/L	SDNCN	SDACR/L-SC	SDHCR/L-SC	SDJCR/L-SC	SDNCN-SC
Kr: 90°	Kr: 93°	Kr: 62°30'	Kr: 90°	Kr: 107°30'	Kr: 93°	Kr: 62°30'
						

S***-SDQCR/L	A***-SDUCR/L	S***-SDZCR/L	E***-SDQCR/L
Kr: 107°30'	Kr: 93°	Kr: 85°	Kr: 107°30'
			


A

Turning

Turning inserts (CBN)

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

TCGW	L	I.C	S	d
11 02	11	6,35	2,38	2,5
16 T3	16,5	9,525	3,97	4,4

TC** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H	○	○	○	○			

B

Milling





ISO				r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C	YCB226
	TCGW110204S01225-3	0,4	0,05-0,3	0,04-0,20			○	○			
	TCGW110208S01225-3	0,8	0,1-0,5	0,08-0,40			○	○			
	TCGW16T304S01225-3	0,4	0,05-0,3	0,04-0,20			○	○			
	TCGW16T308S01225-3	0,8	0,1-0,5	0,08-0,40			○	○	○		
	TCGW16T304T01215-3	0,4	0,05-0,3	0,04-0,20							○
	TCGW16T308T01215-3	0,8	0,1-0,5	0,08-0,40							○

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

C

Drilling

Tool holders					
STACR/L	STFCR/L	STGCR/L	STTCR/L	S***-STFCR/L	E***-STFCR/L
Kr: 90°	Kr: 91°	Kr: 91°	Kr: 60°	Kr: 91°	Kr: 90°
					

D

Technical Information

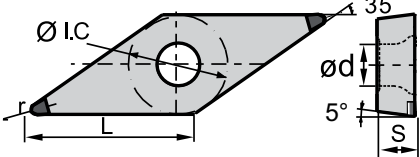
E

Index

Turning inserts (CBN)




-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

VBGW	L	I.C	S	d
16 04	16,6	9,525	4,76	4,4

VB** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H							
ISO				r	a _p	f	YCB805A	YCB810C	YCB820C	YCB830C	YCB226
	VBGW160402S01225-2	0,2	0,05-0,2	0,02-0,10			○ ● ○				
	VBGW160404S01225-2	0,4	0,05-0,3	0,04-0,20			○ ● ●				
	VBGW160408S01225-2	0,8	0,1-0,5	0,08-0,4			○ ● ●				
	VBGW160404T01215-2	0,4	0,05-0,3	0,04-0,20							○
	VBGW160408T01215-2	0,8	0,1-0,5	0,08-0,4							○

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

Tool holders					
SVJBR/L	SVABR/L	SVVBN	S***-SVQBR/L	S***-SVUBR/L	S***-SVXBR/L
Kr: 93°	Kr: 90°	Kr: 72°30'	Kr: 107°30'	Kr: 93°	Kr: 93°
					

A

Turning

B

Milling

C

Drilling

D

Technical Information

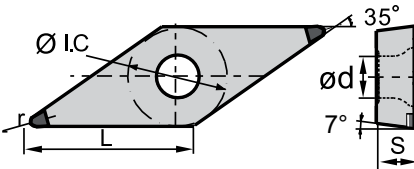
E

Index

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions




VCGW	L	I.C	S	d
16 04	16,6	9,525	4,76	4,4

Turning inserts (CBN)


VC** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H	○	○	○	○			
ISO				r	a _p	f	YCB805A YCB810C YCB820C YCB830C		YCB226		
 VCGW160404S01225-2				0,4	0,05-0,3	0,04-0,20	○	○			
 VCGW160408S01225-2				0,8	0,1-0,5	0,08-0,4	○	○			

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

Tool holders						
SVVCN	SVJCR/L	SVACR/L-SC	SVJCR/L-SC	S***-SVQCR/L	S***-SVUCR/L	C***-SVQCR/L
Kr: 72°30'	Kr: 93°	Kr: 90°	Kr: 93°	Kr: 107°30'	Kr: 93°	Kr: 107°30'
						


C***-SVUCR/L
Kr: 93°



Turning inserts (CBN)

-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

CNGN	L	I.C	S
09 03	9,7	9,525	3,18
12 04	12,9	12,7	4,76

CN** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H							
ISO				r	a _p	f					YZB227
	CNGN090308T01525			0,8	0,5-2,0	0,3-5,0					○
	CNGN090312T01525			1,2	0,5-2,0	0,3-5,0					○
	CNGN120408T01525			0,8	0,5-2,0	0,3-5,0					○
	CNGN120412T01525			1,2	0,5-2,0	0,3-5,0					●
	CNGN120416T01525			1,6	0,5-2,0	0,3-5,0					●
	CNGA120408T01525-M			0,8	0,5-2,0	0,3-5,0					○
	CNGA120412T01525-M			1,2	0,5-2,0	0,3-5,0					○
	CNGA120416T01525-M			1,6	0,5-2,0	0,3-5,0					○

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

Tool holder

CCLNR/L

Kr: 95°



A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index


A

Turning

Turning inserts (CBN)

-  Ideal machining conditions
-  Normal machining conditions
-  Unfavourable machining conditions

RNGN	I.C	S
09 03	9,525	3,18
12 04	12,7	4,76


RN** negative insert			BC (CBN)								BH (CBN)									
			P																	
			M																	
			K																	
			N																	
			S																	
			H																	
ISO		a _p	f																	
	RNGN090300T01525	0,5-2,0	0,3-5,0																	
	RNGN120400T01525	0,5-2,0	0,3-5,0																	
	RNGN120400T01525-M	0,5-2,0	0,3-5,0																	

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

C

Drilling



D

Technical Information


E

Index

Turning inserts (CBN)

-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions



SNGN	L	I.C	S
09 04	9,525	9,525	3,18
12 04	12,7	12,7	4,76

SN** negative insert				BC (CBN)				BH (CBN)			
				P							
				M							
				K							
				N							
				S							
				H							
ISO				r	a _p	f					YZB227
	SNGN090412T01525	1,2	0,5-2,0	0,3-5,0							○
	SNGN090416T01525	1,6	0,5-2,0	0,3-5,0							○
	SNGN120408T01525	0,8	0,5-2,0	0,3-5,0							○
	SNGN120412T01525	1,2	0,5-2,0	0,3-5,0							○
	SNGN120416T01525	1,6	0,5-2,0	0,3-5,0							○
	SNGN120412T01525-M	1,2	0,5-2,0	0,3-5,0							○
	SNGN120416T01525-M	1,6	0,5-2,0	0,3-5,0							●

● Ex stock ○ On demand

BC CBN with coating

BH CBN with a high CBN content

Tool holders		
CSKNR/L	CSRNR/L	CSDNN
Kr: 75°	Kr: 75°	Kr: 45°
		

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index


A

Turning

Turning inserts (CBN)

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

WNGN	L	I.C	S
08 04	8,69	12,7	4,76

WN** negative insert				BC (CBN)								BH (CBN)							
				P															
				M															
				K															
				N															
				S															
				H															

B

Milling

ISO				r	a _p	f																
															YZB227							
	WNGN080408T01525			0,8	0,5-2,0	0,3-5,0									○							
	WNGN080412T01525			1,2	0,5-2,0	0,3-5,0									○							
	WNGN080416T01525			1,6	0,5-2,0	0,3-5,0									○							
	WNGN080416T01525-M			1,6	0,5-2,0	0,3-5,0									○							

● Ex stock ○ On demand

BC CBN with coating
BH CBN with a high CBN content

C

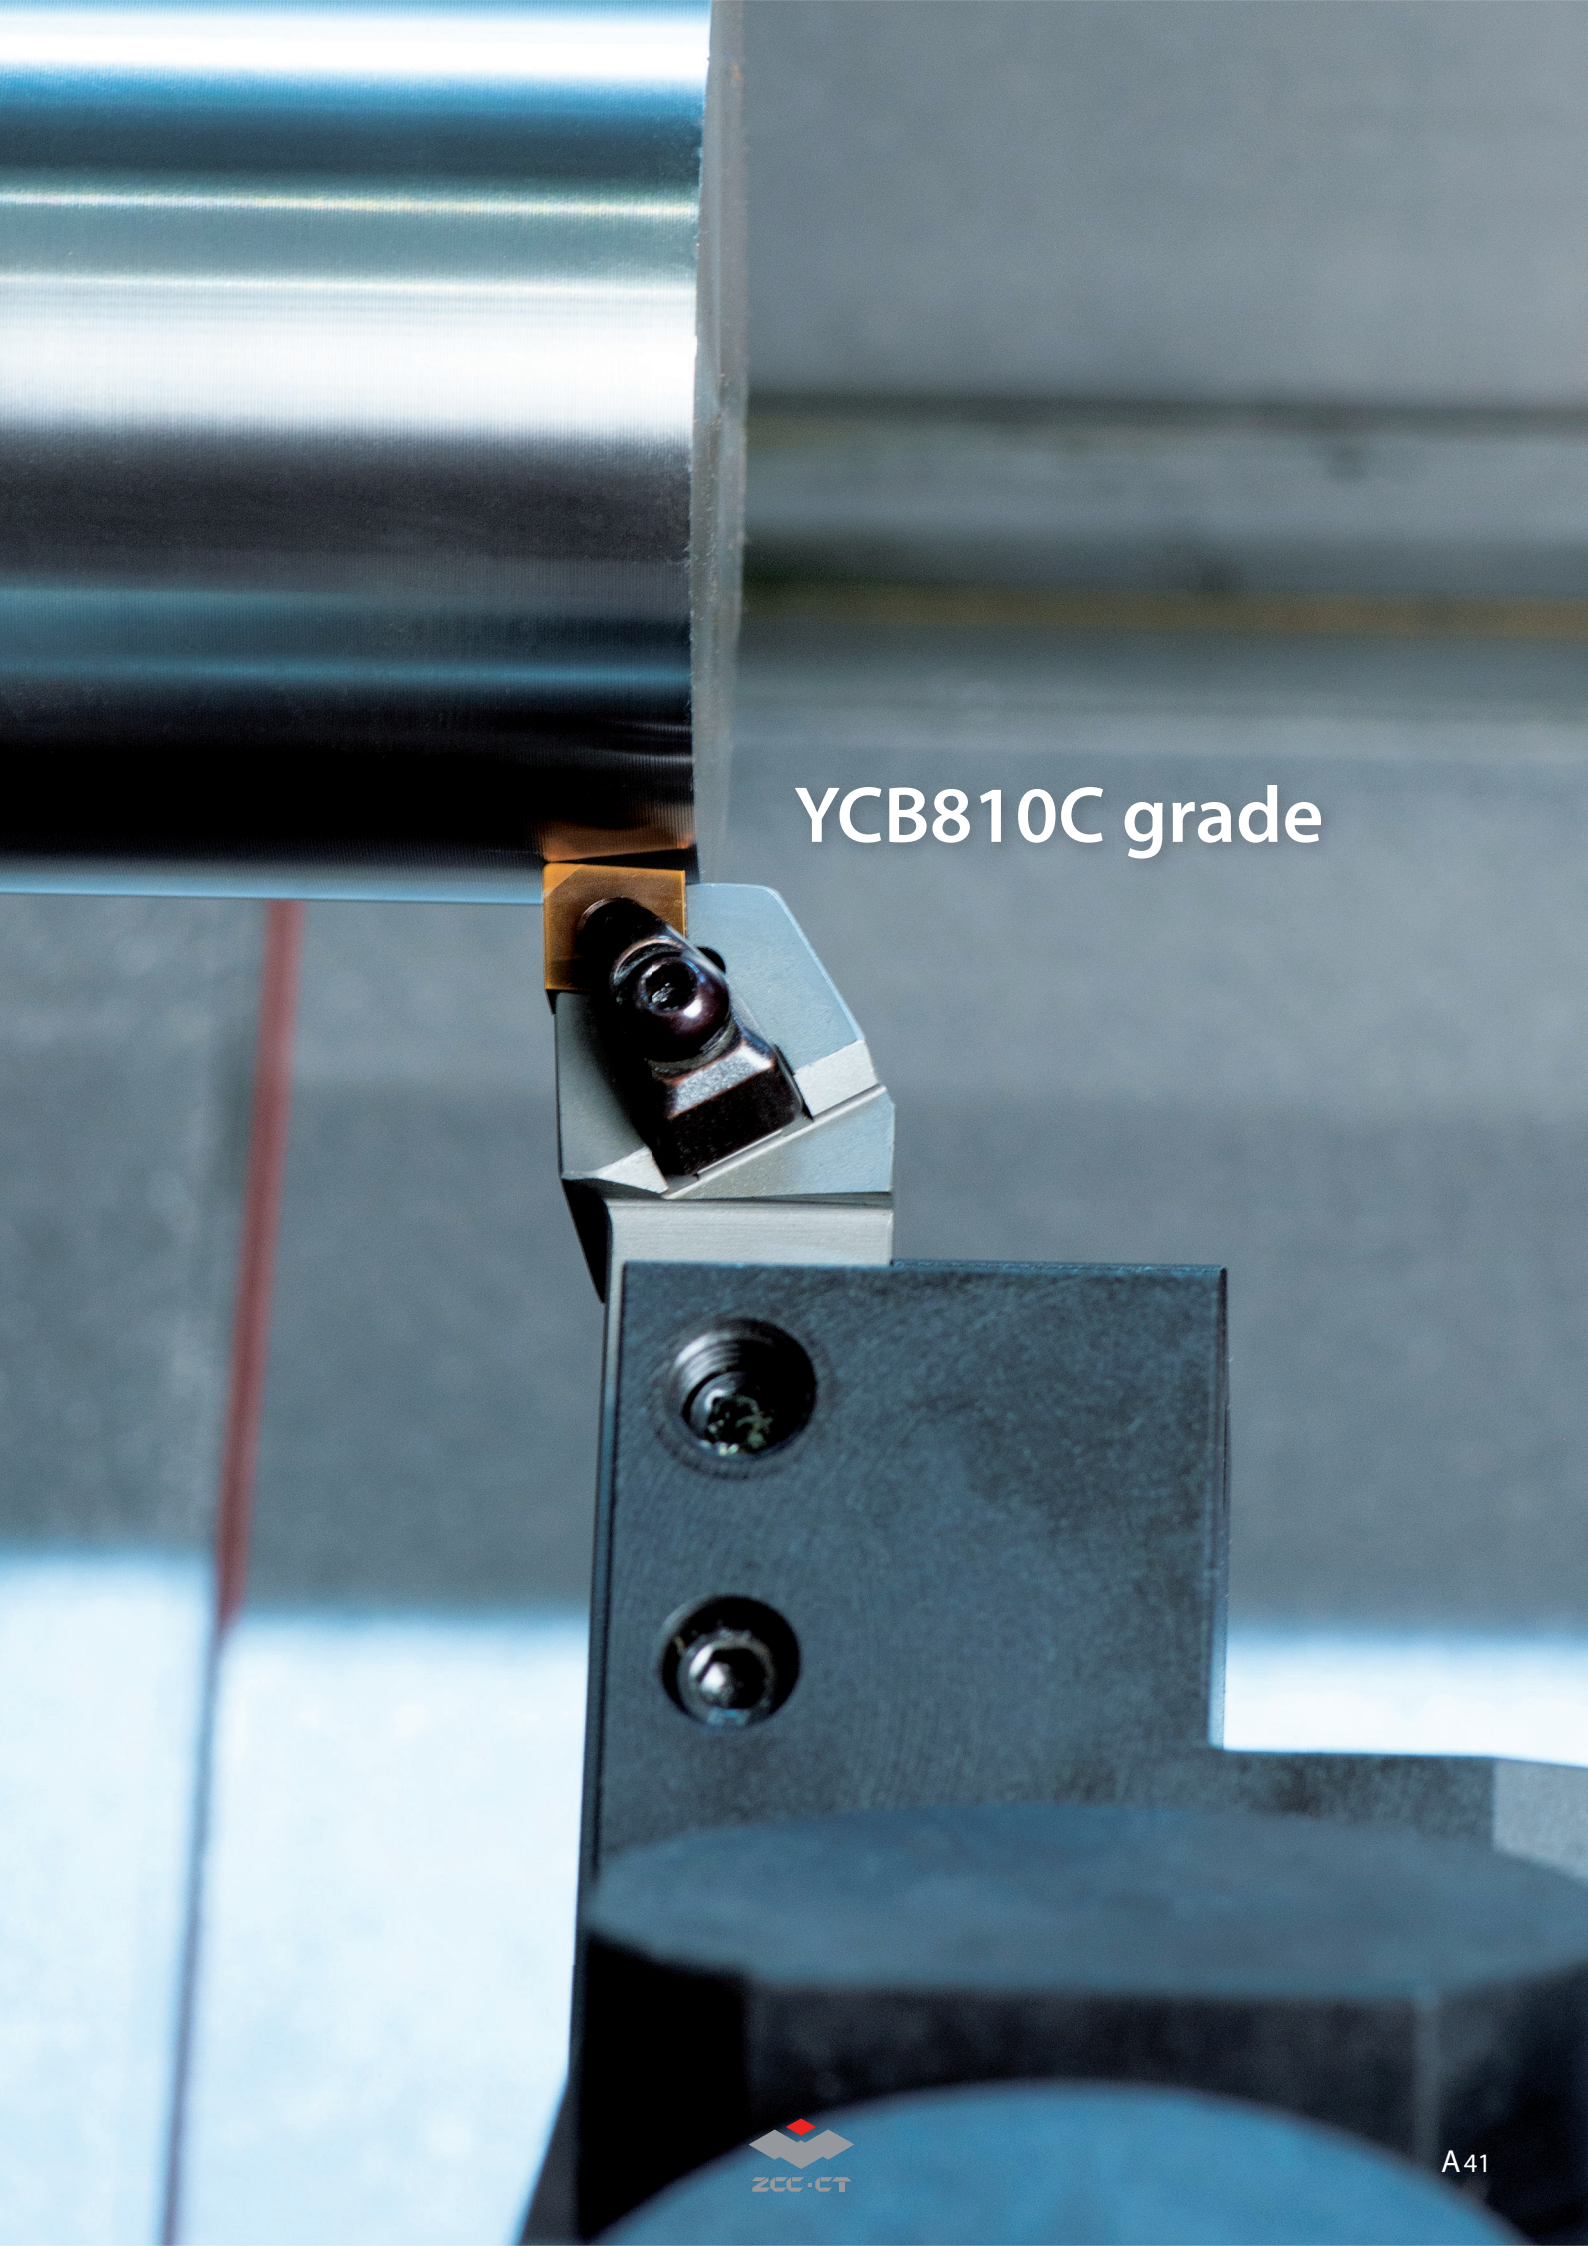
Drilling

D

Technical Information

E

Index

A close-up photograph of a metal cutting operation. A large, polished metal cylinder is on the left, with a metal chip being removed. A small, dark, cylindrical tool or nozzle is positioned at the cutting point. The background is a blurred industrial setting.

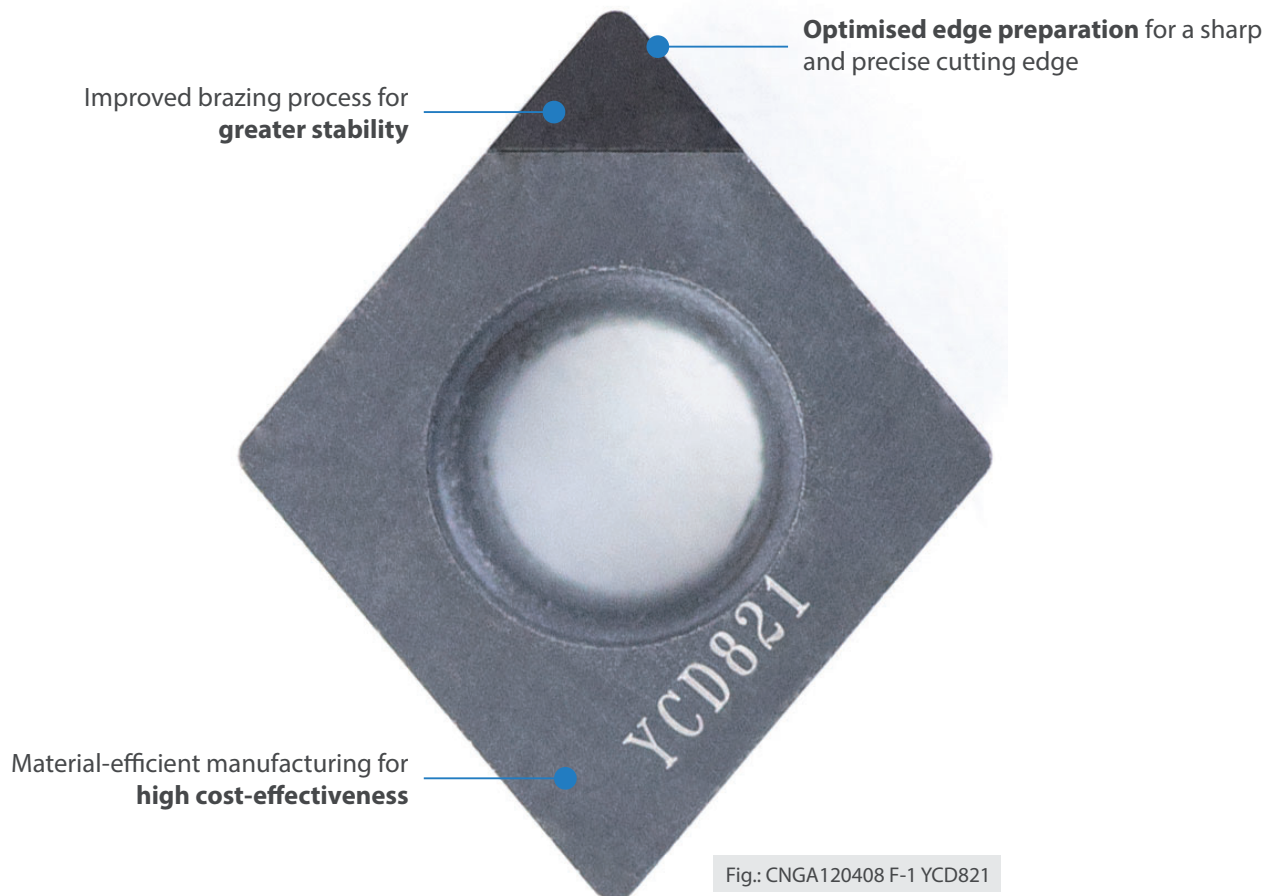
YCB810C grade

YCD821 grade

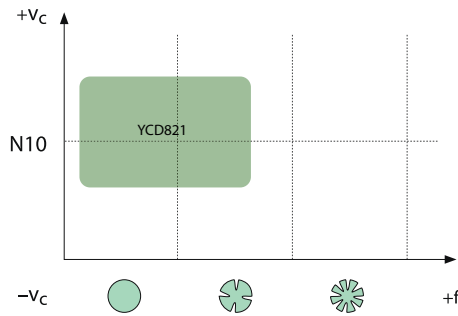
Uncoated PCD grade for non-ferrous metals

YOUR BENEFITS

- The latest generation of PCD materials for **long tool life**
- High-precision manufacturing for **stable processes** and **good surface finishes**
- Efficient and cost-effective high-speed machining
- State-of-the-art manufacturing technologies for **maximum precision**



Grades



YCD821 (all-rounder):

- For the super finishing of aluminium alloys containing less than 12 % Si, composite materials, copper and magnesium
- Good wear resistance across a wide range of applications
- Suitable for turning and milling operations

Chamfer designs

The design of the cutting edge is crucial to the Tool life and performance of the cutting insert. Our 'standard version' covers a wide range of applications. In all other cases, we can offer an optimised edge design to achieve the best possible result.

Standard



F

For PCD inserts with a sharp cutting edge

Insert variants

PKD Blank 0°




For general applications

PKD Blank 0°



Blade assembly for large cutting depths

PKD Blank 7°




Reduced cutting pressure due to a positive rake angle

PKD Blank 7°



Blade assembly for large cutting depths and reduced cutting pressure


PKD Blank 0°



Laser-etched chip-forming step for high process reliability and effective chip formation



As well as the standard corner design, versions with a wiper chamfer or full-surface covering are also available on demand.



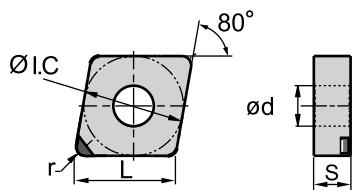
MED: Special process using a laser-cut chip-breaking step

The laser-cut chip-breaking step gives the standard 0° brazed PCD blank a positive rake angle. This reduces the cutting forces and has a positive effect on chip formation. At the same time, the basic stability is maintained. Recommended for use with aluminium alloys, copper alloys, magnesium alloys, plastics or fibre-reinforced composites.

- Ideal machining conditions
- ✿ Normal machining conditions
- ✿ Unfavourable machining conditions

CNGA	L	I.C	S	d
12 04	12,9	12,7	4,76	5,5

Turning inserts (PCD)



CN** negative insert		DP
	P	
	M	
	K	
	N	
	S	
	H	

[illegible]

- Ex stock
- On demand

DP Polycrystalline diamond

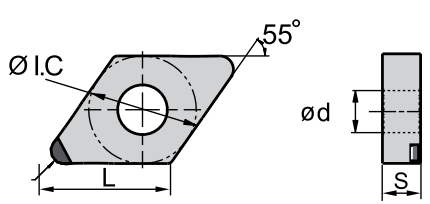
Tool holders

DCLNR/L	PCBNR/L	PCLNR/L	MCBNR/L	MCLNR/L	S***-PCLNR/L
Kr: 95°	Kr: 75°	Kr: 95°	Kr: 75°	Kr: 95°	Kr: 95°
					

Turning inserts (PCD)



-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

DNGA	L	I.C	S	d
15 06	15,5	12,7	6,35	5,16

DN** negative insert				DP											
				P											
				M											
				K											
				N											
				S											
				H											
ISO		r	a _p	f	YCD821										
	DNGA150602 F-1	0,2	0,08-0,5	0,05-0,15	○										
	DNGA150604 F-1	0,4	0,08-0,5	0,05-0,2	○										
	DNGA150608 F-1	0,8	0,08-0,5	0,05-0,25	○										

● Ex stock ○ On demand

DP Polycrystalline diamond

Tool holders						
DDJNR/L	PDJNR/L	PDNNR/L	MDJNR/L	MDPNN	S***-PDSNR/L	S***-PDUNR/L
Kr: 93°	Kr: 93°	Kr: 63°	Kr: 93°	Kr: 62°30'	Kr: 62°30'	Kr: 93°
						

A

Turning

Turning inserts (PCD)

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

VNGA	L	I.C	S	d
16 04	16,6	9,525	4,76	3,81

VN** negative insert		DP									
	P										
	M										
	K										
	N	●									
	S										
	H										

B

Milling

ISO		r	a _p	f	YCD821										
	VNGA160402F-1	0,2	0,08-0,5	0,05-0,15	○										
	VNGA160404F-1	0,4	0,08-0,5	0,05-0,2	○										

● Ex stock ○ On demand

DP Polycrystalline diamond

C

Drilling

Tool holders			
DVVNN	DVJNR/L	MVVNN	MVJNR/L
Kr: 72°30'	Kr: 93°	Kr: 72°30'	Kr: 93°

D

Technical Information

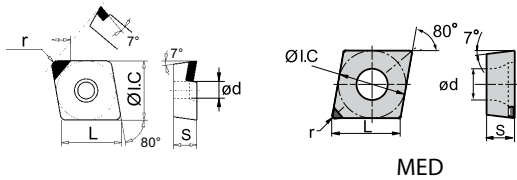
E

Index

Turning inserts (PCD)






-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

CCGT	L	I.C	S	d
06 02	6,4	6,35	2,38	2,8
09 T3	9,7	9,525	3,97	4,4
12 04	12,9	12,7	4,76	5,5

CC** positive insert				DP															
				P															
				M															
				K															
				N															
				S															
				H															
ISO	r	a _p	f	YCD821															
	CCGT060202F-1	0,2	0,08-0,5	0,05-0,15															
	CCGT060204F-1	0,4	0,08-0,5	0,05-0,2															
	CCGT060208F-1	0,8	0,08-0,5	0,05-0,25															
	CCGT09T302F-1	0,2	0,08-0,5	0,05-0,15															
	CCGT09T304F-1	0,4	0,08-0,5	0,05-0,2															
	CCGT09T308F-1	0,8	0,08-0,5	0,05-0,25															
	CCGT120402F-1	0,2	0,08-0,5	0,05-0,15															
	CCGT120404F-1	0,4	0,08-0,5	0,05-0,2															
	CCGT120408F-1	0,8	0,08-0,5	0,05-0,25															
	CCGT060204F-1 MED	0,4	0,08-0,5	0,05-0,2															
	CCGT060208F-1 MED	0,8	0,08-0,5	0,05-0,25															
	CCGT09T302F-1 MED	0,2	0,08-0,5	0,05-0,15															
	CCGT09T304F-1 MED	0,4	0,08-0,5	0,05-0,2															
	CCGT09T308F-1 MED	0,8	0,08-0,5	0,05-0,25															

● Ex stock ○ On demand

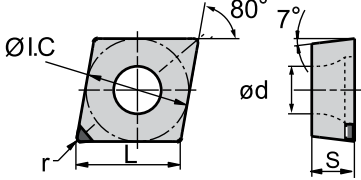
DP Polycrystalline diamond

Tool holders						
SCACR/L	SCLCR/L	SCACR/L-SC	SCLCR/L-SC	A***-SCLCR/L	S***-SCFCR/L	S***-SCLCR
Kr: 90°	Kr: 95°	Kr: 90°	Kr: 95°	Kr: 95°	Kr: 90°	Kr: 95°
						
E***-SCLCR/L Kr: 95°						
						

Turning inserts (PCD)





-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

CCGW	L	I.C	S	d
06 02	6,4	6,35	2,38	2,8
09 T3	9,7	9,525	3,97	4,4
12 04	12,9	12,7	4,76	5,5

CC** positive insert				DP											
				P											
				M											
				K											
				N											
				S											
				H											
ISO	r	a _p	f	YCD821											
	CCGW060202F-1	0,2	0,08-0,5	0,05-0,15											
	CCGW060204F-1	0,4	0,08-0,5	0,05-0,2											
	CCGW060208F-1	0,8	0,08-0,5	0,05-0,25											
	CCGW09T304F-1	0,4	0,08-0,5	0,05-0,2											
	CCGW09T308F-1	0,8	0,08-0,5	0,05-0,25											
	CCGW120404F-1	0,4	0,08-0,5	0,05-0,2											
	CCGW120408F-1	0,8	0,08-0,5	0,05-0,25											

● Ex stock ○ On demand

DP Polycrystalline diamond

Tool holders						
SCACR/L	SCLCR/L	SCACR/L-SC	SCLCR/L-SC	A***-SCLCR/L	S***-SCFCR/L	S***-SCLCR
Kr: 90°	Kr: 95°	Kr: 90°	Kr: 95°	Kr: 95°	Kr: 90°	Kr: 95°
						

E***-SCLCR/L
Kr: 95°



A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

A

Turning

Turning inserts (PCD)

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

CCGW	L	I.C	S	d
06 02	6,4	6,35	2,38	2,8
09 T3	9,7	9,525	3,97	4,4
12 04	12,9	12,7	4,76	5,5

CC** positive insert				DP															
				P															
				M															
				K															
				N	●														
				S															
				H															
ISO	r	a _p	f	YCD821															
	CCGW09T304LL	0,4	0,1-8,0	0,05-0,3	○														
	CCGW09T304LR	0,4	0,1-8,0	0,05-0,3	○														
	CCGW09T308LL	0,8	0,1-8,0	0,05-0,3	●														
	CCGW09T308LR	0,8	0,1-8,0	0,05-0,3	●														
	CCGW120404LL	0,4	0,1-10,0	0,05-0,3	○														
	CCGW120404LR	0,4	0,1-10,0	0,05-0,3	○														
	CCGW120408LL	0,8	0,1-10,0	0,05-0,3	○														
	CCGW120408LR	0,8	0,1-10,0	0,05-0,3	○														

● Ex stock ○ On demand

DP Polycrystalline diamond

B

Milling

C

Drilling

D

Technical Information

E

Index


Tool holders						
SCACR/L	SCLCR/L	SCACR/L-SC	SCLCR/L-SC	A***-SCLCR/L	S***-SCFCR/L	S***-SCLCR
Kr: 90°	Kr: 95°	Kr: 90°	Kr: 95°	Kr: 95°	Kr: 90°	Kr: 95°

E***-SCLCR/L
Kr: 95°

Turning inserts (PCD)








-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions


DCGT	L	I.C	S	d
07 02	7,8	6,35	2,38	2,8
11 T3	11,6	9,525	3,97	4,4

DC** positive insert				DP															
				P															
				M															
				K															
				N															
				S															
				H															
ISO	r	a _p	f	YCD821															
	DCGT070202F-1	0,2	0,08-0,5	0,05-0,15	○														
	DCGT070204F-1	0,4	0,08-0,5	0,05-0,2	○														
	DCGT11T302F-1	0,2	0,08-0,5	0,05-0,15	●														
	DCGT11T304F-1	0,4	0,08-0,5	0,05-0,2	●														
	DCGT11T308F-1	0,8	0,08-0,5	0,05-0,25	●														

● Ex stock ○ On demand

DP Polycrystalline diamond

Tool holders						
SDACR/L	SDJCR/L	SDNCN	SDACR/L-SC	SDHCR/L-SC	SDJCR/L-SC	SDNCN-SC
Kr: 90°	Kr: 93°	Kr: 62°30'	Kr: 90°	Kr: 107°30'	Kr: 93°	Kr: 62°30'
						

S***-SDQCR/L	A***-SDUCR/L	S***-SDZCR/L	E***-SDQCR/L
Kr: 107°30'	Kr: 93°	Kr: 85°	Kr: 107°30'
			

A

Turning

B

Milling

C

Drilling

D

Technical
Information

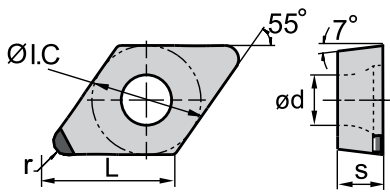
E

Index

Turning inserts (PCD)








-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

DCGW	L	I.C	S	d
07 02	7,8	6,35	2,38	2,8
11 T3	11,6	9,525	3,97	4,4

DC** positive insert				DP											
				P											
				M											
				K											
				N	○										
				S											
				H											
ISO	r	a _p	f	YCD821											
	DCGW070202F-1	0,2	0,08-0,5	0,05-0,15	○										
	DCGW070204F-1	0,4	0,08-0,5	0,05-0,2	●										
	DCGW070208F-1	0,8	0,08-0,5	0,05-0,25	●										
	DCGW11T302F-1	0,2	0,08-0,5	0,05-0,15	●										
	DCGW11T304F-1	0,4	0,08-0,5	0,05-0,2	●										
	DCGW11T308F-1	0,8	0,08-0,5	0,05-0,25	●										

● Ex stock ○ On demand

DP Polycrystalline diamond

Tool holders						
SDACR/L	SDJCR/L	SDNCN	SDACR/L-SC	SDHCR/L-SC	SDJCR/L-SC	SDNCN-SC
Kr: 90°	Kr: 93°	Kr: 62°30'	Kr: 90°	Kr: 107°30'	Kr: 93°	Kr: 62°30'
						
S***-SDQCR/L	A***-SDUCR/L	S***-SDZCR/L	E***-SDQCR/L			
Kr: 107°30'	Kr: 93°	Kr: 85°	Kr: 107°30'			
						

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

- Ideal machining conditions
- ✱ Normal machining conditions
- ✱ Unfavourable machining conditions

TCGT	L	I.C	S	d
11 02	11	6,35	2,38	2,5
16 T3	16,5	9,525	3,97	4,4

Turning inserts (PCD)

TC** positive insert		DP
	P	
	M	
	K	
	N	●
	S	
	H	

[illegible]

● Ex stock ○ On demand

DP Polycrystalline diamond


Tool holders

STACR/L	STFCR/L	STGCR/L	STTCR/L	S***-STFCR/L	E***-STFCR/L
Kr: 90°	Kr: 91°	Kr: 91°	Kr: 60°	Kr: 91°	Kr: 90°
					

Turning inserts (PCD)

-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions





TCGT	L	I.C	S	d
11 02	11	6,35	2,38	2,8
16 T3	16,5	9,525	3,97	4,4

TC** positive insert				DP															
				P															
				M															
				K															
				N															
				S															
				H															
ISO		r	a _p	f	YCD821														
	TCGT110202L	0,2	0,08-0,50	0,05-0,15	○														
	TCGT110204L	0,4	0,08-0,50	0,05-0,20	○														
	TCGT110208L	0,8	0,08-0,50	0,05-0,25	○														
	TCGT16T302L	0,2	0,08-0,50	0,05-0,15	○														
	TCGT16T304L	0,4	0,08-0,50	0,05-0,20	○														
	TCGT16T308L	0,8	0,08-0,50	0,05-0,25	○														

● Ex stock ○ On demand

DP Polycrystalline diamond


Tool holders

STACR/L	STFCR/L	STGCR/L	STTCR/L	S***-STFCR/L	E***-STFCR/L
Kr: 90°	Kr: 91°	Kr: 91°	Kr: 60°	Kr: 91°	Kr: 90°
					

Turning inserts (PCD)





-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

TCGW	L	I.C	S	d
11 02	11	6,35	2,38	2,5
16 T3	16,5	9,525	3,97	4,4

TC** positive insert				DP															
				P															
				M															
				K															
				N															
				S															
				H															
ISO	r	a _p	f	YCD821															
	TCGW110202L	0,2	0,1-10,0	0,05-0,3	○														
	TCGW110204L	0,4	0,1-10,0	0,05-0,3	○														
	TCGW110208L	0,8	0,1-10,0	0,05-0,3	○														
	TCGW16T302L	0,2	0,1-12,0	0,05-0,3	○														
	TCGW16T304L	0,4	0,1-12,0	0,05-0,3	○														
	TCGW16T308L	0,8	0,1-12,0	0,05-0,3	○														

● Ex stock ○ On demand

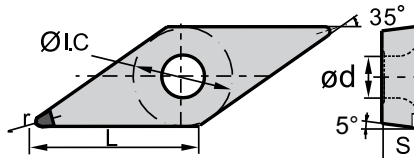
DP Polycrystalline diamond

Tool holders					
STACR/L	STFCR/L	STGCR/L	STTCR/L	S***-STFCR/L	E***-STFCR/L
Kr: 90°	Kr: 91°	Kr: 91°	Kr: 60°	Kr: 91°	Kr: 90°
					

Turning inserts (PCD)




-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

VBGW	L	I.C	S	d
11 03	11	6,35	3,18	2,8
16 04	16,6	9,525	4,76	4,4

VB** positive insert				DP									
				P									
				M									
				K									
				N									
				S									
				H									
ISO	r	a _p	f	YCD821									
	VBGW110302F-1	0,2	0,08-0,5	0,05-0,15	○								
	VBGW110304F-1	0,4	0,08-0,5	0,05-0,2	○								
	VBGW160402F-1	0,2	0,08-0,5	0,05-0,15	○								
	VBGW160404F-1	0,4	0,08-0,5	0,05-0,2	○								
	VBGW160408F-1	0,8	0,08-0,5	0,05-0,25	○								

● Ex stock ○ On demand


DP Polycrystalline diamond

Tool holders					
SVJBR/L	SVABR/L	SVVBN	S***-SVQBR/L	S***-SVUBR/L	S***-SVXBR/L
Kr: 93°	Kr: 90°	Kr: 72°30'	Kr: 107°30'	Kr: 93°	Kr: 93°
					

Turning inserts (PCD)



-  Ideal machining conditions
 Normal machining conditions
 Unfavourable machining conditions

VCGT	L	I.C	S	d
11 03	11	6,35	3,18	2,8
16 04	16,6	9,525	4,76	4,4

VC** positive insert				DP															
				P															
				M															
				K															
				N	○														
				S															
				H															
ISO	r	a _p	f	YCD821															
	VCGW110302F-1	0,2	0,08-0,5	0,05-0,15	○														
	VCGW110304F-1	0,4	0,08-0,5	0,05-0,2	○														
	VCGW110308F-1	0,8	0,08-0,5	0,05-0,25	○														
	VCGW160404F-1	0,4	0,08-0,5	0,05-0,2	●														
	VCGW160408F-1	0,8	0,08-0,5	0,05-0,25	●														

● Ex stock ○ On demand

DP Polycrystalline diamond

Tool holders						
SVVCN	SVJCR/L	SVACR/L-SC	SVJCR/L-SC	S***-SVQCR/L	S***-SVUCR/L	C***-SVQCR/L
Kr: 72°30'	Kr: 93°	Kr: 90°	Kr: 93°	Kr: 107°30'	Kr: 93°	Kr: 107°30'
						

C***-SVUCR/L
Kr: 93°



Turning inserts

Material group		Composition / structure / heat treatment		Brinell hardness HB	Machining group	Starting values for cutting speed v_c [m/min]												
						BC												
						YCB805C			YCB810C			YCB820C						
						Feed rate [mm]			Feed rate [mm]			Feed rate [mm]						
						0,05	0,2	0,35	0,1	0,2	0,3	0,1	0,2	0,3				
P	Unalloyed steel	approx. 0,15 % C	annealed	125	1													
		approx. 0,45 % C	annealed	190	2													
		approx. 0,45 % C	tempered	250	3													
		approx. 0,75 % C	annealed	270	4													
		approx. 0,75 % C	tempered	300	5													
	Low-alloyed steel		annealed	180	6													
			tempered	275	7													
			tempered	300	8													
		tempered	350	9														
High-alloyed steel and high-alloyed tool steel		annealed	200	10														
		hardened and tempered	325	11														
M	Stainless steel	ferritic/martensitic	annealed	200	12													
		martensitic	tempered	240	13													
		austenitic	quench hardened	180	14													
		austenitic-ferritic		230	15													
K	Grey cast iron	perlitic/ferritic		180	16													
		perlitic (martensitic)		260	17													
	Cast iron with spheroidal graphite	ferritic		160	18													
		perlitic		250	19													
	Malleable cast iron	ferritic		130	20													
		perlitic		230	21													
N	Aluminium wrought alloys	cannot be hardened		60	22													
		hardenable	hardened	100	23													
	Cast aluminium alloys	≤ 12 % Si, cannot be hardened		75	24													
		≤ 12 % Si, hardenable	hardened	90	25													
		> 12 % Si, cannot be hardened		130	26													
	Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27													
		CuZn, CuSnZn		90	28													
		CuSn, Pb-free copper, electrolytic copper		100	29													
S	Heat-resistant alloys	Fe-based alloys	annealed	200	30													
			hardened	280	31													
		Ni or Co bass	annealed	250	32													
			hardened	350	33													
			cast	320	34													
	Titanium alloys	pure titanium		R _m 400	35													
		α and β alloys	hardened	R _m 1050	36													
H	Hardened steel		hardened and tempered	55 HRC	37	240	180	140	240	180	140	220	170	130				
			hardened and tempered	60 HRC	38	220	180	140	220	180	140	200	160	120				
	Hard cast iron		cast	400	39	250	150	100	250	150	100	200	150	100				
	Hardened cast iron		hardened and tempered	55 HRC	40	200	150	100	200	150	100	200	150	100				
X	Non-metallic materials	Thermoplastics			41													
		Thermosetting plastics			42													
		Plastic, glass-fibre reinforced GFRP			43													
		Plastic, carbon fibre reinforced CFRP			44													
		Graphite			45													
		Wood			46													

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.
For examples of material for cutting tool groups view page D11.

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

- | | |
|-----------------|--|
| HC | Coated carbide |
| HT | Uncoated carbide, primary component (TiC) or (TiN), cermet |
| HW | Uncoated carbide, primary component (WC) |
| BL | Cubic boron nitride with low BN content |
| BH | Cubic boron nitride with high BN content |
| CN | Si ₃ N ₄ ceramic |
| CM | Mixed ceramic |
| HC ₁ | Coated cermet |
| BC | CBN with coating |
| CC | Coated cutting ceramic |
| CR | Cutting ceramic, primary component aluminium oxide (Al ₂ O ₃) |
| DP | Polycrystalline diamond |

PSC 50 P C L N L 22 045 12 IC

1 2 3 4 5 6 7 8 9 10 11

Interface	
Code	Description
PSC	Polygonal shank DIN ISO26623-1

Interface size d ₁ [mm]	
Code	Description
32	32
40	40
50	50
63	63

1


2

Clamping system	
Code	Description
P	Knee lever clamping
S	Screw clamping



Insert shape	
C	
R	
T	
W	
D	
S	
V	

3

4


Tool holder type and entering angle				
				
A	B	C	D	E
				
F	G	H	J	K
				
L	M	N	O	P
				
Q	R	S	T	U
				
V	W	X		

5


Clearance angle	
	
B	C
	
D	E
	
N	P

6

Cutting direction




L



R


7

Dimension F



8

Dimension A



9

Cutting edge length l [mm]

I.C [mm]	Insert shape						
5,56							09
6,35	06	07					11
9,525	09	11	09	09	16	16	06
12,7	12	15	12	12	22	22	08
15,875	16	19	15	15	27		
19,05	19		19	19	33		
25,4	25		25	25	44		
32			32				

10

High-pressure cooling

11

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

PSC tool holders for great precision and stability

YOUR BENEFITS

- The form-fit, self-centring polygonal shank absorbs high bending moments and **minimises vibrations** thanks to its rigidity
- Enables **quick tool changes with maximum repeatability**
- Minimised downtime whilst increasing machine utilisation thanks to faster set-up times
- **Versatile use** on CNC lathes and multi-tasking turning/milling centres
- Efficient high-pressure cooling for **lower temperatures** during machining



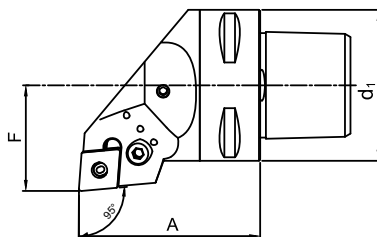
CN** holder (external)

P clamping

PCLN/L Kr: 95°



Right hand type



Article	*	Stock		Dimensions [mm]			Insert
		R	L	d ₁	F	A	
PSC32.PCLNL.22045.12IC	*	○	●	32	22	45	CN**1204**
PSC40.PCLNL.27050.12IC	*	○	●	40	27	50	CN**1204**
PSC50.PCLNL.35060.12IC	*	○	●	50	35	60	CN**1204**
PSC63.PCLNL.45065.12IC	*	○	●	63	45	65	CN**1204**

● Ex stock ○ On demand

* With internal cooling

Spare parts

	Insert	CN**1204**
	Knee lever	L4
	Screw	LEM8x21 (10.2Nm)
	Shim	C12AP
	Shim pin (shim)	SP4
	Wrench	WH30L

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

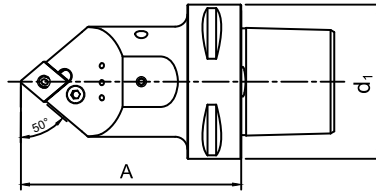
Index

A

Turning

CN** holder (external) P clamping

PCMNN Kr: 50°



Neutral version

B

Milling

Article		Stock	Dimensions [mm]		Insert
		N	d ₁	A	
PSC63.PCMNN.00090.12IC	*	●	63	90	CN**1204**

● Ex stock ○ On demand

* With internal cooling

C

Drilling

Spare parts		
	Insert	CN**1204**
	Knee lever	L4
	Screw	LEM8x21 (10.2 Nm)
	Shim	C12AP
	Shim pin	SP4
	Wrench	WH30L

D

Technical Information

E

Index

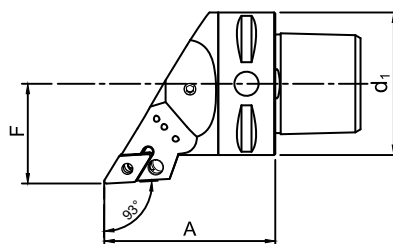
DN** holder (external)

P clamping

PDJNR/L Kr: 93°



Right hand type



Article	*	Stock		Dimensions [mm]			Insert
		R	L	d ₁	F	A	
PSC40.PDJNR.27050.11IC	*	●		40	27	50	DN**1104**
PSC50.PDJNL.35060.11IC	*		●	50	35	60	DN**1104**
PSC50.PDJNR.35060.11IC	*	●		50	35	60	DN**1104**

● Ex stock ○ On demand

* With internal cooling

Spare parts		
	Insert	DN**1104**
	Knee lever	L3
	Screw	LEM6x13.4A (7 Nm)
	Shim	D11AP
	Shim pin	SP3
	Wrench	WH25L

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

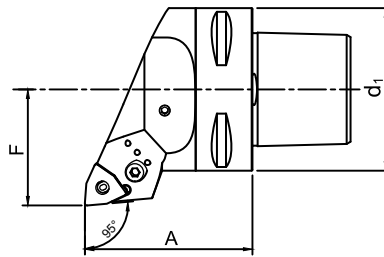
WN** holder (external)

P clamping

PWLNLR/L Kr: 95°



Right hand type



Article	*	Stock		Dimensions [mm]			Insert
		R	L	d ₁	F	A	
PSC63.PWLNLR.45065.08IC	*	●	●	63	45	65	WN**0804**
PSC63.PWLNLR.45065.08IC	*	●	●	63	45	65	WN**0804**

● Ex stock ○ On demand

* With internal cooling

Spare parts		
	Insert	WN**0804**
	Knee lever	L4
	Screw	LEM8x21 (10.2 Nm)
	Shim	W08AP
	Shim pin	SP4
	Wrench	WH30L

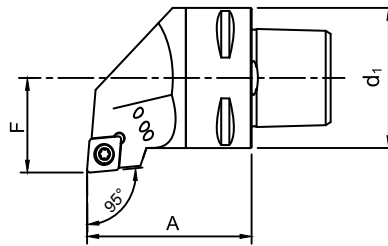
CC** holder (external)

S clamping

SCLCR/L Kr: 95°



Right hand type



Article	*	Stock		Dimensions [mm]			Insert
		R	L	d ₁	F	A	
PSC32.SCLCL.22045.09IC	*	●		32	22	45	CC**09T3**
PSC32.SCLCR.22045.09IC	*	●		32	22	45	CC**09T3**
PSC40.SCLCL.27050.09IC	*	●		40	27	50	CC**09T3**
PSC40.SCLCR.27050.09IC	*	●		40	27	50	CC**09T3**

● Ex stock ○ On demand

* With internal cooling

Spare parts

	Insert	CC**09T3**
	Screw	I60M3.5x8 (2.7Nm)
	Wrench	WT15IP

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

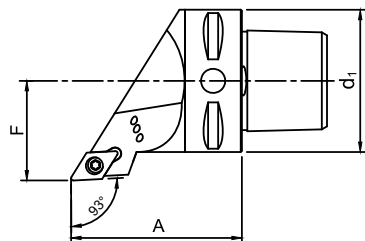
DC** holder (external)

P clamping

SDJCR/L Kr: 93°



Right hand type



	*	Stock		Dimensions [mm]			Insert
		R	L	d ₁	F	A	
PSC40.SDJCR.27050.11IC	*	●		40	27	50	DC**11T3**
PSC50.SDJCL.35060.11IC	*		●	50	35	60	DC**11T3**
PSC50.SDJCR.35060.11IC	*	●		50	35	60	DC**11T3**
PSC63.SDJCL.45065.11IC	*		●	63	45	65	DC**11T3**
PSC63.SDJCR.45065.11IC	*	●		63	45	65	DC**11T3**

● Ex stock ○ On demand

* With internal cooling

Spare parts		
	Insert	DC**11T3**
	Screw	I60M3.5x12 (2.7Nm)
	Screw (Shim)	SM5x8.65XA
	Shim	D11BS
	Wrench (Insert)	WT15IP
	Wrench (Shim)	WH35L

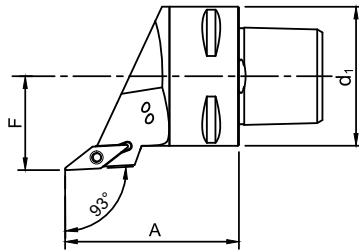
VC** holder (external)

S clamping

SVJCR/L Kr: 93°



Right hand type



Article	*	Stock		Dimensions [mm]			Insert 
		R	L	d ₁	F	A	
PSC40.SVJCL.27050.11IC	*	●		40	27	50	VC**1103**
PSC40.SVJCR.27050.11IC	*	●		40	27	50	VC**1103**
PSC50.SVJCL.35060.11IC	*	●		50	35	60	VC**1103**
PSC50.SVJCR.35060.11IC	*	●		50	35	60	VC**1103**

● Ex stock ○ On demand

* With internal cooling

Spare parts

	Insert	VC**1103**
	Screw	I60M2.5x6.5 (1.0Nm)
	Wrench	WT07IP

A

Turning

B

Milling

C

Drilling

D

Technical
Information

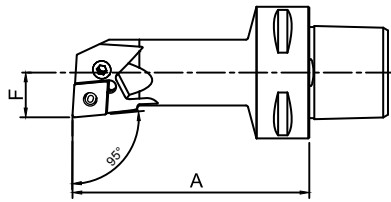
E

Index

CN** holder (internal)

P clamping

PCLNR/L Kr: 93°



Right hand type

Article	*	Stock		Dimensions [mm]			Insert
		R	L	d ₁	F	A	
PSC50.PCLNR.17090.12IC	*	●		50	17	90	CN**1204**
PSC63.PCLNL.17100.12IC	*		●	63	17	100	CN**1204**
PSC63.PCLNR.17100.12IC	*	●		63	17	100	CN**1204**

● Ex stock ○ On demand

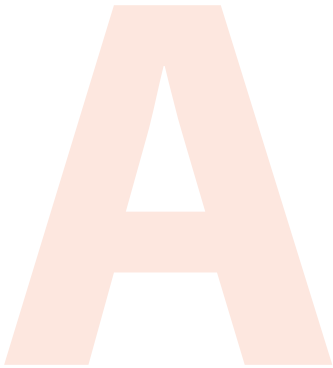
* With internal cooling

Spare parts		
	Insert	CN**1204**
	Knee lever	L4A
	Screw	LEM6x13.4A (7Nm)
	Wrench	WH25L

Modular grooving system

zGroove Compact – axial machining
zGroove Compact – parting-off solution for CNC
production lathes

A76–A81
A82



A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

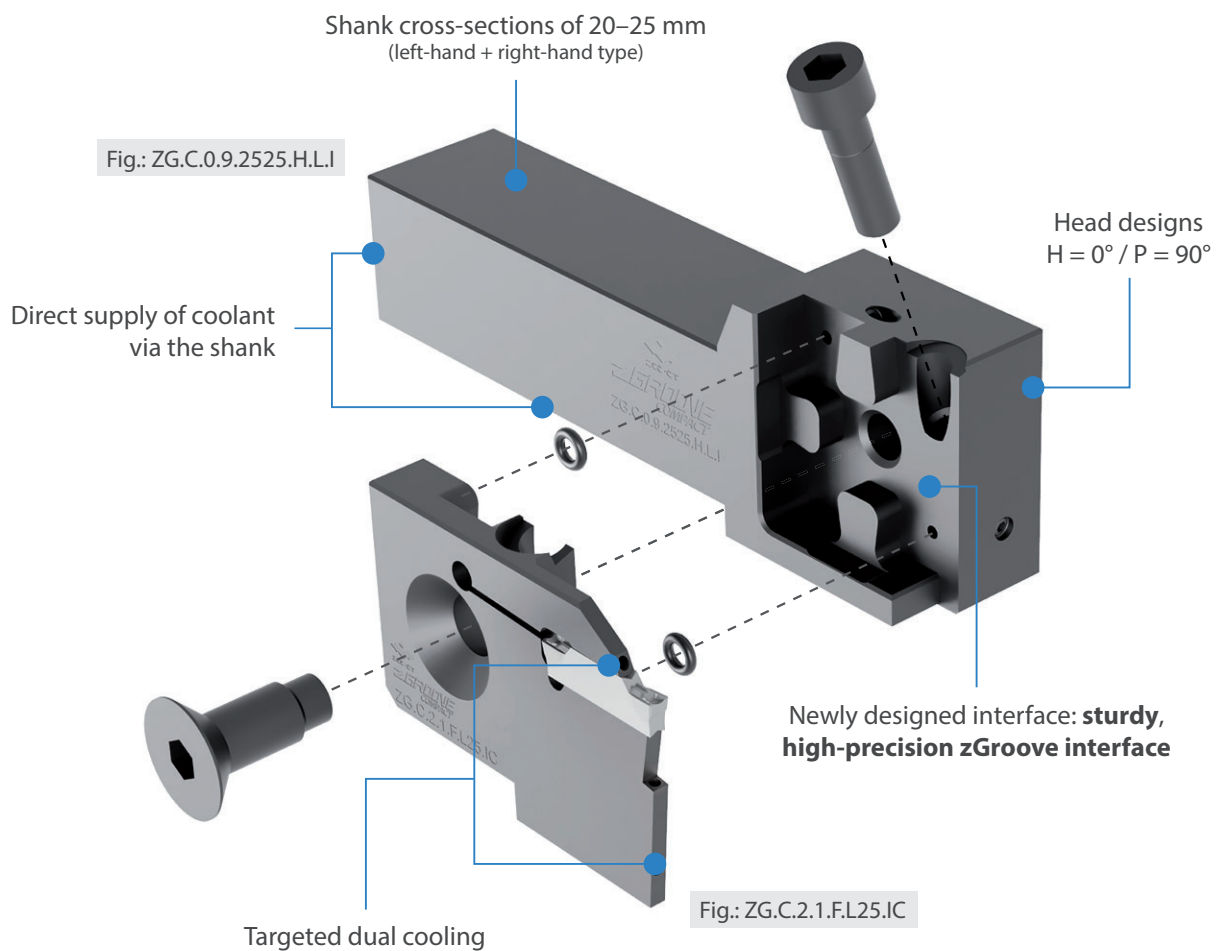
ZGROOVE[®] COMPACT

Compact design, easy to work with

Now also available for axial machining New

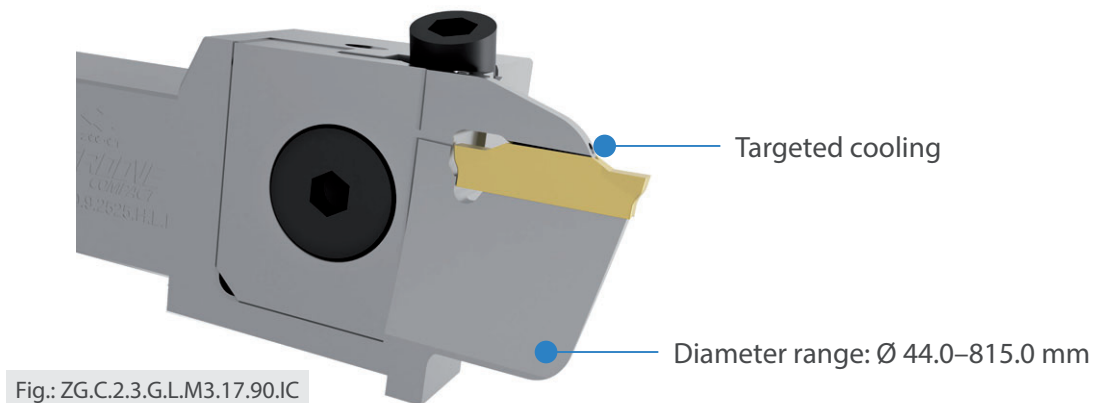
YOUR BENEFITS

- Newly designed zGroove interface for **simple** and **precise change-over of any component**
- **Excellent chip removal** and **reduced machining temperatures** thanks to targeted cooling
- **Compatible with a wide range of machines** thanks to compact design
- Sturdy design for all parting and grooving/turning applications



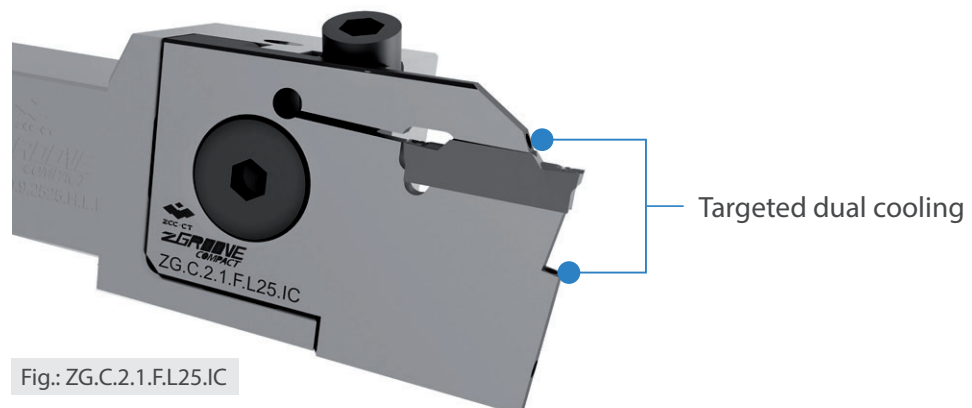
NEW: Type for axial machining

- These types are compatible with all zGroove Compact shank holders
- Targeted coolant delivery to the cutting zone
- It is also possible to groove along a stud
- Axial cutting depths of 10.0–22.0 mm
- Diameter range: Ø 44.0–815.0 mm
- Groove widths: 3.0–6.0 mm



Type for radial machining

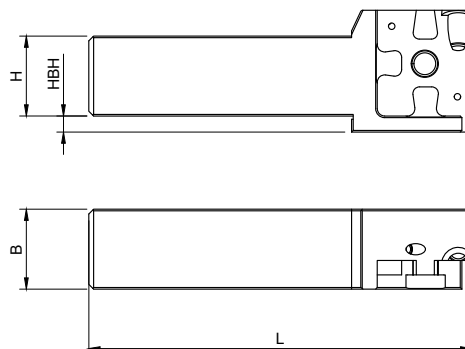
- These types are compatible with all zGroove Compact shank holders
- Targeted dual cooling
- Radial cutting depths of 10.0–30.0 mm
- Parting-off with a reinforced primary cartridge up to Ø 80 mm
- Groove widths: 1.5–8.0 mm



zGroove Compact shank holder, H = 0°



Left hand style



Left hand style

Article	*	Stock	Dimensions [mm]				Primary cartridge
			H	B	L	HBH	
ZG.C.0.9.2020.H.L.I	*	●	20	20	108	10	ZG.C.2.*.*.L**..IC
ZG.C.0.9.2525.H.L.I	*	●	25	25	120	5	ZG.C.2.*.*.L**..IC

● Ex stock ○ On demand

Right hand style

Article	*	Stock	Dimensions [mm]				Primary cartridge
			H	B	L	HBH	
ZG.C.0.9.2020.H.R.I	*	●	20	20	108	10	ZG.C.2.*.*.R**..IC
ZG.C.0.9.2525.H.R.I	*	●	25	25	120	5	ZG.C.2.*.*.R**..IC

● Ex stock ○ On demand

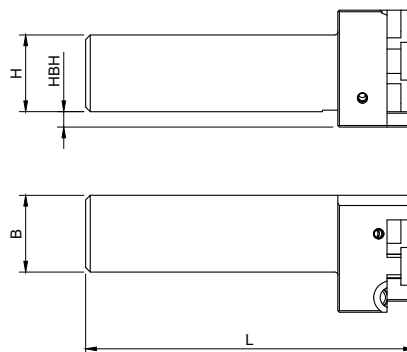
Spare parts

		Article	Stock
	Screw (primary cartridge)	ZG.C.2.M8*16	●
	Screw (insert)	GB70-85-M6*20	●

zGroove Compact shank holder, P = 90°



Left hand style



Left hand style

Article	*	Stock	Dimensions [mm]				Primary cartridge
			H	B	L	HBH	
ZG.C.0.9.2020.P.LR.I	*	●	20	20	90	10	ZG.C.2.*.*.R**..IC
ZG.C.0.9.2525.P.LR.I	*	●	25	25	107	5	ZG.C.2.*.*.R**..IC

● Ex stock ○ On demand

Right hand style

Article	*	Stock	Dimensions [mm]				Primary cartridge
			H	B	L	HBH	
ZG.C.0.9.2020.P.RL.I	*	●	20	20	90	10	ZG.C.2.*.*.L**..IC
ZG.C.0.9.2525.P.RL.I	*	●	25	25	107	5	ZG.C.2.*.*.L**..IC

● Ex stock ○ On demand

Spare parts

		Article	Stock
	Screw (primary cartridge)	ZG.C.2.M8*16	●
	Screw (insert)	GB70-85-M6*20	●

A

Turning

B

Milling

C

Drilling

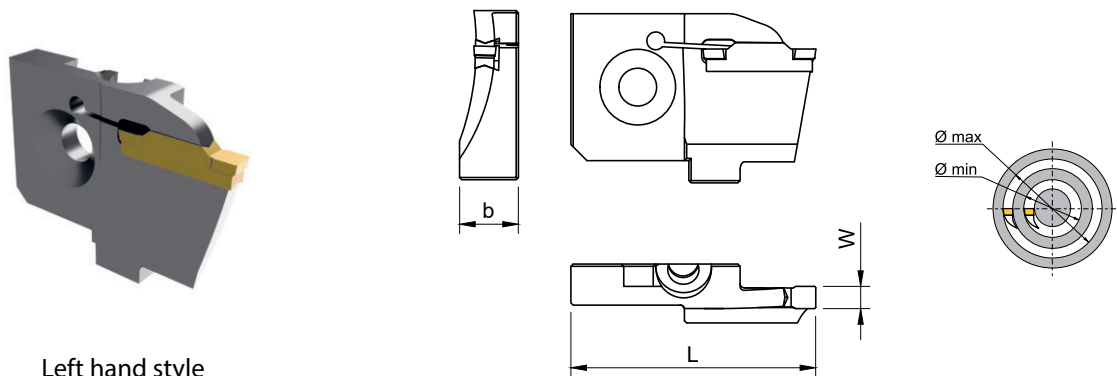
D

Technical
Information

E

Index

zGroove Compact primary cartridge (grooving / axial turning)



Left hand style

Article	*	Stock		Dimensions [mm]						Insert
		R	L	W	Spindle rotation direction	a _r max.	ØD (min-max)	L	b	
ZG.C.2.3.F.R.M4.10.44.IC	*	●		3.0	M4 (CCW)	10	44-65	50	13,2	Z*F*030*~**
ZG.C.2.3.F.L.M3.10.44.IC	*		●	3.0	M3 (CW)	10	44-65	50	13,2	Z*F*030*~**
ZG.C.2.3.G.R.M4.17.48.IC	*	●		4.0	M4 (CCW)	17	48-62	55	13,2	Z*G*040*~**
ZG.C.2.3.G.L.M3.17.48.IC	*		●	4.0	M3 (CW)	17	48-62	55	13,2	Z*G*040*~**
ZG.C.2.3.G.R.M4.17.62.IC	*	●		4.0	M4 (CCW)	17	62-90	55	13,2	Z*G*040*~**
ZG.C.2.3.G.L.M3.17.62.IC	*		●	4.0	M3 (CW)	17	62-90	55	13,2	Z*G*040*~**
ZG.C.2.3.G.R.M4.17.90.IC	*	●		4.0	M4 (CCW)	17	90-177	55	13,2	Z*G*040*~**
ZG.C.2.3.G.L.M3.17.90.IC	*		●	4.0	M3 (CW)	17	90-177	55	13,2	Z*G*040*~**
ZG.C.2.3.H.R.M4.17.48.IC	*	●		5.0	M4 (CCW)	17	48-68	55	13,2	Z*H*050*~**
ZG.C.2.3.H.L.M3.17.48.IC	*		●	5.0	M3 (CW)	17	48-68	55	13,2	Z*H*050*~**
ZG.C.2.3.H.R.M4.17.90.IC	*	●		5.0	M4 (CCW)	17	90-135	55	13,2	Z*H*050*~**
ZG.C.2.3.H.L.M3.17.90.IC	*		●	5.0	M3 (CW)	17	90-135	55	13,2	Z*H*050*~**
ZG.C.2.3.H.R.M4.22.215.IC	*	●		5.0	M4 (CCW)	22	215-815	55	10,7	Z*H*050*~**
ZG.C.2.3.H.L.M3.22.215.IC	*		●	5.0	M3 (CW)	22	215-815	55	10,7	Z*H*050*~**
ZG.C.2.3.K.R.M4.22.100.IC	*	●		6.0	M4 (CCW)	22	100-200	55	13,2	Z*K*060*~**
ZG.C.2.3.K.L.M3.22.100.IC	*		●	6.0	M3 (CW)	22	100-200	55	13,2	Z*K*060*~**

● Ex stock ○ On demand



Find all compatible grooving inserts on our website.

Spare parts

	Article	Stock
	ZG.C.S.3*1.5	●



n max. 5000 min⁻¹
F axial max. 65 kN
F radial max. 172 kN

Achtung:
Transportschrauben
vor Inbetriebnahme
entfernen

Caution:
Remove lifting bolts
before start-up!

MA = 8 Nm

zGroove Compact

Parting-off solution for
CNC production lathes

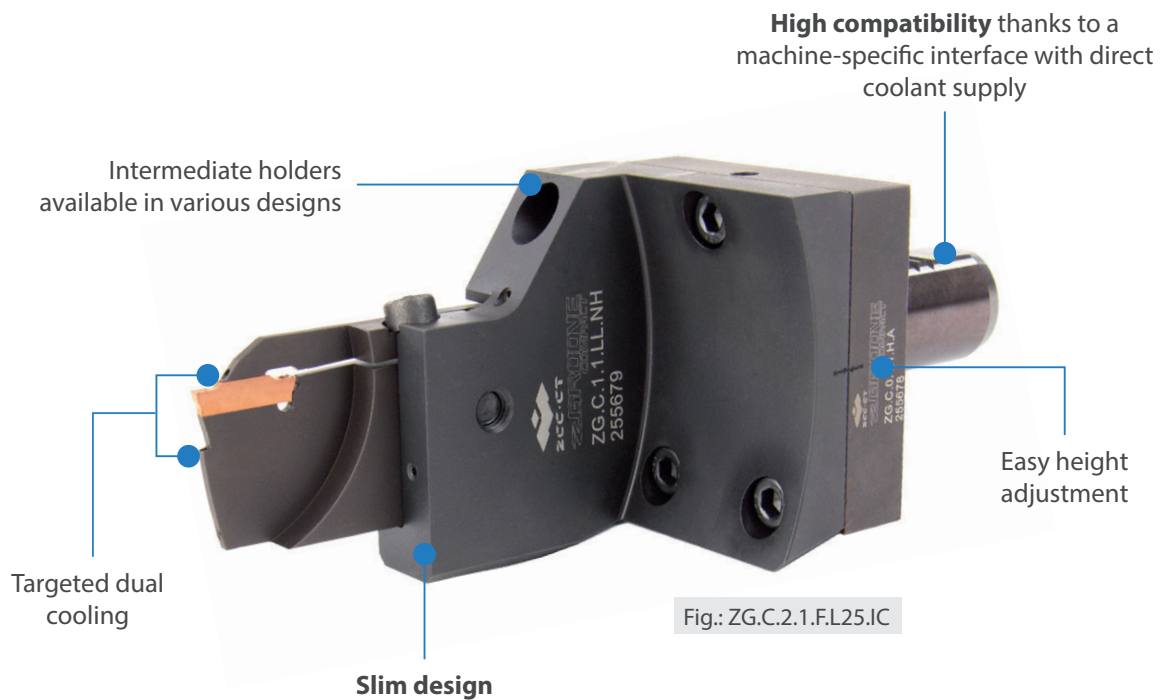
ZGROOVE[®] COMPACT

Compact design, easy to work with

Now also available as a parting-off solution for CNC production lathes New

YOUR BENEFITS

- Modular 3-component system: Base holders, intermediate holders and primary cassettes can be combined as required
- Slim design in the part-off zone for **minimum spindle clearance**
- Cutting depth and width can be flexibly adjusted by changing the adapter
- Centre height manually adjustable, even without a Y-axis
- **Coolant supply directly via the turret**, with no hoses at all
- Base holders for star and disc turrets – **the right interface for every situation**
- Parting off to the centre for bar passages up to Ø80 mm



VDI base holders for disc and star turrets from VDI25 to VDI50, as well as some PSC and BMT types, are already available. Further models available on demand. Please do get in touch with us to discuss your bespoke solution!

Indexable milling

ISO code – inserts

B84–B85

System code – milling bodies

B86–B87

 PANGU PG9005 grade

B88–B89

 PANGU PG9020/PG9025 grades

B90–B91

EMP11 square shoulder milling system

B92–B97

Recommended cutting data

B98–B101

B

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

S P K N 12 04 ED T21K R – DM

1

2

3

4

5

6

7

8

9

10

Insert shape	
A	C
H	L
M	O
P	R
S	T
W	X Special
Z	Special

1

Clearance angle	
B	C
D	E
F	N
P	O Special

2

Tolerance class			
Code	I.C [mm]	m [mm]	S [mm]
A	±0,025	±0,005	±0,025
C	±0,025	±0,013	±0,025
E	±0,025	±0,025	±0,025
F	±0,013	±0,005	±0,025
G	±0,025	±0,025	±0,130
H	±0,013	±0,013	±0,025
J	±0,05–0,13	±0,005	±0,025
K	±0,05–0,13	±0,013	±0,025
L	±0,05–0,13	±0,025	±0,025
M	±0,05–0,13	±0,08–0,18	±0,130
N	±0,05–0,13	±0,08–0,18	±0,025
U	±0,08–0,25	±0,13–0,38	±0,130


3

Fastening features (metric)	
Insert shape	
A	B
C	F
G	H
J	M
N	Q
R	T
U	W
X	Special


4

Cutting edge length l [mm]	
Insert shape	
A	C, M
H, O, P	L
R	S
T	W

5

Insert thickness S [mm]			
			
Code	S	Code	S
00	0,79	05	5,56
T0	0,99	T5	5,95
01	1,59	06	6,35
T1	1,98	T6	6,75
02	2,38	07	7,94
T2	2,58	09	9,52
03	3,18	T9	9,72
T3	3,97	11	11,11
04	4,76	12	12,70
T4	4,96		

6

Angle			
			
Code	Kr	Code	an
A	45°	A	3°
D	60°	B	5°
E	75°	C	7°
F	85°	D	15°
P	90°	E	20°
Z	Special	F	25°
		G	30°
		N	0°
		P	11°
		Z	Special

7

Chamfer							
Code	Type	Code	Angle	Code	Width [mm]	Code	Position
F		0	5°	0	0,10	K	
E		1	10°	1	0,15	P	
T		2	15°	2	0,20	W	
S		3	20°	3	0,25	-	
		4	25°	4	0,30		
		5	30°	5	0,35		
				6	0,40		
				7	0,45		

8

Cutting direction	
Code	Description
R	Right
L	Left
N	Right and left

9

Chip breaker overview (on page B26)
--

10

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

FM A 12 050 – A22 O – N 06 – 04 (L) (C)

1

2

3

4

5

6

7

8

9

10

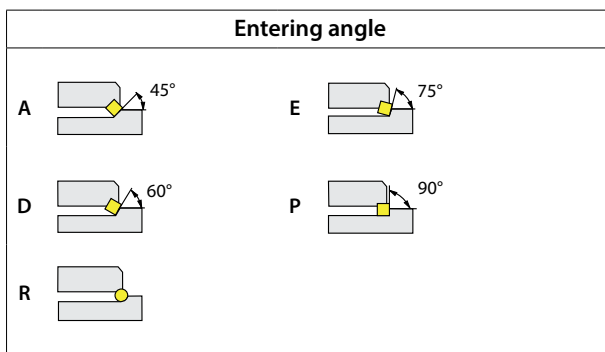
11

Type

Code	Description
BM	Profile milling
CM	Chamfer milling
EM	Square shoulder milling
FM	Face milling
HM	Helical milling
SM	Slot milling
TM	T-slot milling
XM	Special

1

Entering angle



2

Serial number

3

Nominal diameter [mm]

Code	Description
025	25
050	50
160	160
315	315
...	

4

Type and size of tool holders

Code	Type	Code	Type
A	Nominal diameter Ø50 – 80 mm	B	Nominal diameter Ø100 – 160 mm
C	Nominal diameter Ø200 – 250 mm	D	Nominal diameter Ø315 mm
G	Straight shank	XP	Weldon shank
K	Bore with keyway		

5

With respect to mounting please adhere to the information provided by the tool holder manufacturer.

Insert shape	
A 	C 
H 	L 
M 	O 
P 	R 
S 	T 
W 	X Special
Z Special	

6

Clearance angle	
B 	C 
D 	E 
F 	N 
P 	

7

Cutting edge length l [mm]	
Insert shape	
	
A	C, M
	
H, O, P	L
	
R	S
	
T	W

8

Number of teeth

9

Cutting direction	
Code	Description
L	Left

10

With inner cooling

11


Tools with B coupling and inner coolant supply require the following spare parts:



Coolant clamp screw



Coolant shower plate



Spare parts (B coupling with inner coolant supply)					
	Ø	B27	B32	B40	B40
		80	100	125	160
	Coolant clamp screw	LDB27C	LDB32C	LDB40C	LDB40C
	Coolant shower plate	B27-002-CP	B32-002-CP	B40-002-CP	B40-003-CP

When purchasing tools with inner coolant supply and B coupling these spare parts are included in delivery.

PG9005 grade

Premium PVD grade for finishing and for hardened materials

YOUR BENEFITS

- **Specially developed** for finishing operations and the machining of hard materials
- An ultra-fine, homogeneous substrate for **high wear resistance** and **longTool life**
- Suitable for milling materials up to **58 HRC**
- High dimensional accuracy for **excellent surface quality**



Fig.: ZOHX2005-HM PG9005

Articles available with the new PG9005 grade:

Article	Stock	Milling system
APKT070204-APF PG9005	●	EMP01/02
APKT070204-APM PG9005	●	EMP01/02
APKT11T304-APF PG9005	●	EMP01/02
APKT11T304-APM PG9005	●	EMP01/02
APKT11T308-APF PG9005	●	EMP01/02
APKT11T308-APM PG9005	●	EMP01/02
APKT11T312-APM PG9005	●	EMP01/02
APKT11T316-APM PG9005	●	EMP01/02
APKT11T320-APM PG9005	●	EMP01/02
APKT160408-APF PG9005	●	EMP01/02

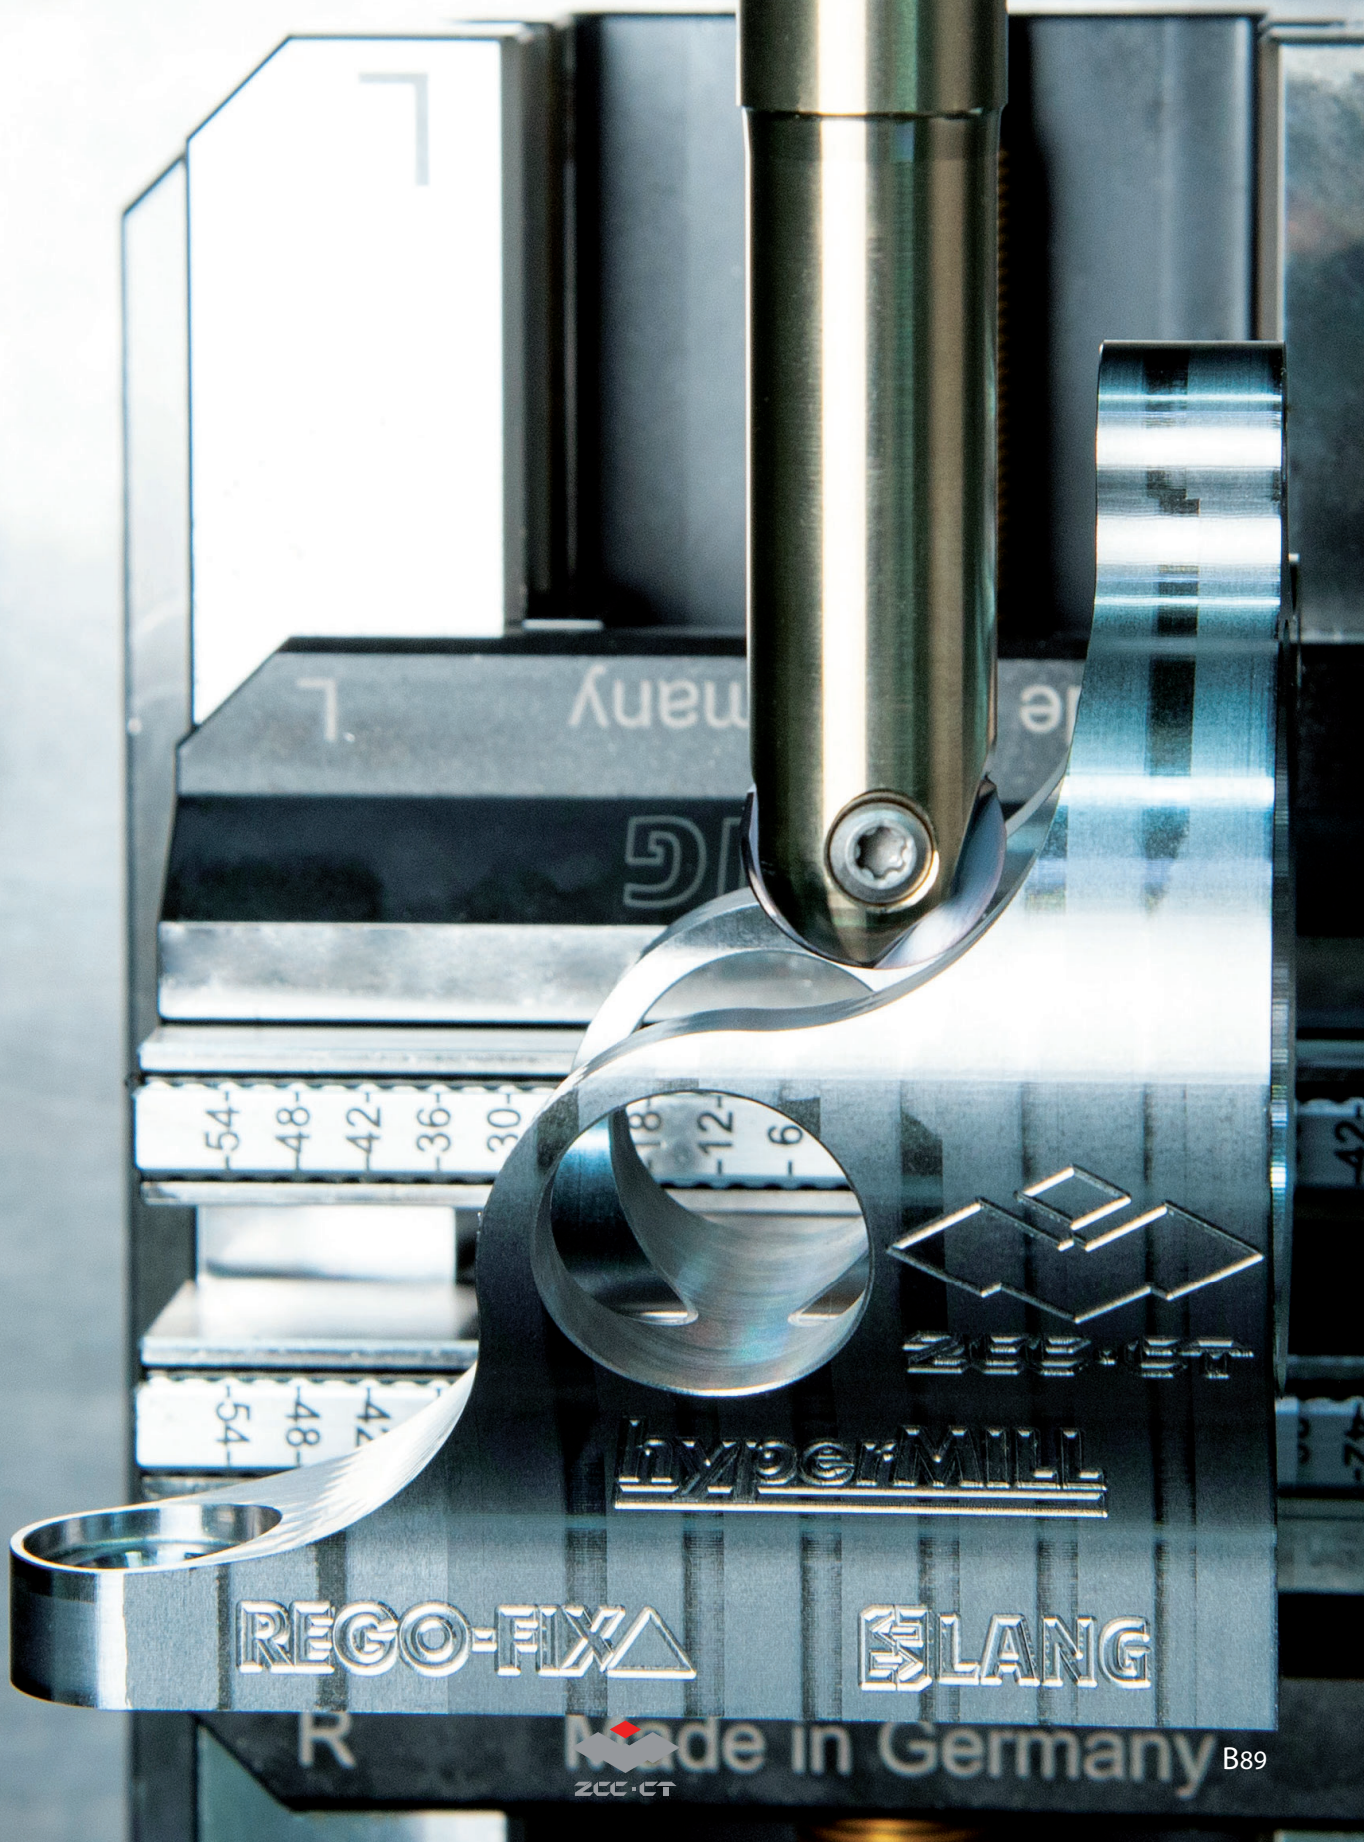
● Ex stock ○ On demand

Article	Stock	Milling system
APKT160408-APM PG9005	●	EMP01/02
APKT160416-APM PG9005	●	EMP01/02
APKT160420-APM PG9005	●	EMP01/02
APKT160424-APM PG9005	●	EMP01/02
APKT160430-APM PG9005	●	EMP01/02
RCKT1204MO-NM PG9005	●	FMR02
ZOHX1203-HM PG9005	●	BMR04
ZOHX1604-HM PG9005	●	BMR04
ZOHX2005-HM PG9005	●	BMR04
ZOHX2506-HM PG9005	●	BMR04
ZOHX3007-HM PG9005	●	BMR04

● Ex stock ○ On demand



PG9005 grade



PG9020/PG9025 grades

PANGU

Two high-performance milling grades

YOUR BENEFITS

- High-performance coating for **reduction of diffusion wear** and **crater formation**
- Enables **high cutting speeds** even with materials that are difficult to machine
- Low internal coating stress for **greater edge stability**

PG9020

- High process reliability during roughing and finishing
- Supports higher cutting speeds

PG9025

- With **high toughness**, particularly suitable for machining involving interrupted cuts
- Optimised for the cost-effective machining of stainless steel materials

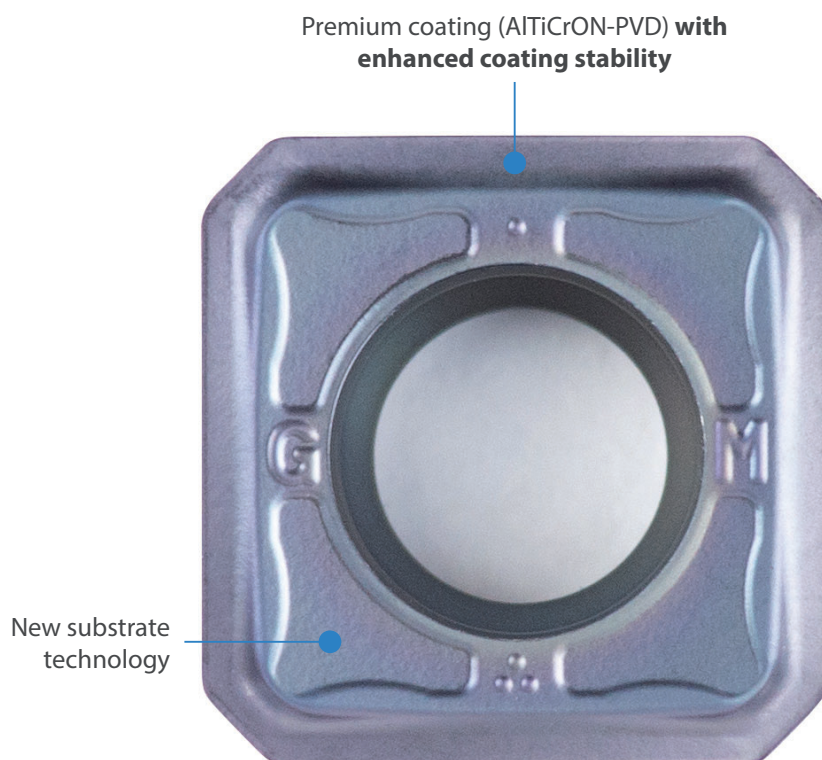


Fig.: SNMX1205ANN-GM PG9025

Items available with the new PG9020 and PG9025 grades:

Article	Stock	Milling system
APKT11T304-APM PG9020	●	EMP01/02
APKT11T308-APM PG9020	●	EMP01/02
APKT11T312-APM PG9020	●	EMP01/02
APKT11T316-APM PG9020	●	EMP01/02
APKT11T320-APM PG9020	●	EMP01/02
APKT160408-APM PG9020	●	EMP01/02
APKT160412-APM PG9020	●	EMP01/02
APKT160416-APM PG9020	●	EMP01/02
APKT160420-APM PG9020	●	EMP01/02
APKT160424-APM PG9020	●	EMP01/02
APKT160430-APM PG9020	●	EMP01/02
ONMU060408-GM PG9020	●	FMA12
ONMU09T512-GM PG9020	○	FMA12
RDMT10T3MO-MM PG9020	●	FMR11
RDMT1204MO-MM PG9020	●	FMR11
RPMT10T3MO-MM PG9020	●	FMR11
RPMT1204MO-MM PG9020	●	FMR11
SDMT06T208-NL PG9020	●	XMR01
SDMT06T208-NM PG9020	●	XMR01
SDMT09T312-NL PG9020	●	XMR01
SDMT09T312-NM PG9020	●	XMR01
SDMT120412-NL PG9020	●	XMR01
SDMT120412-NM PG9020	●	XMR01
SNGX1205ANN-GM PG9020	●	FMA17
SNGX1205ENN-GM PG9020	●	FME17
SNGX1205PNN-GM PG9020	●	FMP17
SNMX120512-GH PG9020	●	FM*17
SNMX120512-GM PG9020	●	FM*17
SNMX120512-GR PG9020	●	FM*17
SNMX1205ANN-GM PG9020	●	FMA17
SNMX1205ANN-GR PG9020	○	FMA17
SNMX1205ENN-GR PG9020	○	FME17
SNMX1205PNN-GR PG9020	○	FMP17

● Ex stock ○ On demand

Article	Stock	Milling system
APKT11T304-APM PG9025	●	EMP01/02
APKT11T308-APM PG9025	●	EMP01/02
APKT11T312-APM PG9025	●	EMP01/02
APKT11T316-APM PG9025	●	EMP01/02
APKT11T320-APM PG9025	●	EMP01/02
APKT160408-APM PG9025	●	EMP01/02
APKT160412-APM PG9025	●	EMP01/02
APKT160416-APM PG9025	●	EMP01/02
APKT160420-APM PG9025	●	EMP01/02
APKT160424-APM PG9025	●	EMP01/02
APKT160430-ANL PG9025	●	EMP01/02
APKT160430-APM PG9025	●	EMP01/02
ONMU060408-GM PG9025	○	FMA12
ONMU060408-GR PG9025	○	FMA12
ONMU09T512-GM PG9025	●	FMA12
RDMT10T3MO-MM PG9025	●	FMR11
RDMT1204MO-MM PG9025	●	FMR11
RPMT10T3MO-MM PG9025	○	FMR11
RPMT1204MO-MM PG9025	○	FMR11
RPMT1605MO-MM PG9025	○	FMR11
SDMT06T208-NL PG9025	●	XMR01
SDMT06T208-NM PG9025	●	XMR01
SDMT09T312-NL PG9025	●	XMR01
SDMT09T312-NM PG9025	●	XMR01
SDMT120412-NL PG9025	●	XMR01
SDMT120412-NM PG9025	●	XMR01
SNGX1205ANN-GM PG9025	●	FMA17
SNGX1205ENN-GM PG9025	●	FME17
SNGX1205PNN-GM PG9025	●	FMP17
SNMX120512-GH PG9025	●	FM*17
SNMX120512-GM PG9025	●	FM*17
SNMX120512-GR PG9025	●	FM*17
SNMX1205ANN-GM PG9025	●	FMA17
SNMX1205ANN-GR PG9025	●	FMA17
SNMX1205ENN-GR PG9025	●	FME17
SNMX1205PNN-GR PG9025	●	FMP17

● Ex stock ○ On demand

EMP11 square shoulder milling system

A cost-effective all-rounder for small parts production

YOUR BENEFITS

- An ideal alternative to solid carbide end mills due to the small size of the indexable inserts
- V-shaped insert underside for **optimum self-alignment and stability**
- A larger core diameter **improves the tool's rigidity and stability**
- Various chip breaker designs for precise shoulder machining or high-feed strategies
- Wide range of applications for steel, stainless materials and cast materials



Insert grades

YBG205H

PVD
P10–P30
M20–M40

YBD252

CVD
K20–K35

Chip breaker

CVMX-PNR-GM



General machining
(Square shoulder milling)

CVMX-XR-GM



General machining
(High-feed milling)

Shoulder milling, $K_r 90^\circ$

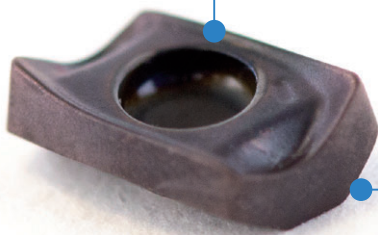


Fig.: CVMX060204PNR-GM YBG205H

High-feed geometry $K_r 18^\circ$

Ideal for shallow cuts
at very high feed rates






V-shaped insert
underside

Fig.: CVMX0602XR-GM YBG205H

Square shoulder milling

EMP11 Kr: 90°



Article	*	Stock	Dimensions [mm]						Teeth	kg	Insert
			ØD	ød	L ₁	L ₂	L	a _{p max}			
EMP11-006-G06-CV06-01C-S	*	●	6	6	12		60	5,00	1		CVMX0602**
EMP11-008-G08-CV06-02C-S	*	○	8	8	12		60	5,00	2		
EMP11-008-G08-CV06-02C-M	*	●	8	8	22		75	5,00	2		
EMP11-008-G12-CV06-02C-L	*	○	8	12	27	20	80	5,00	2		
EMP11-010-G10-CV06-02C-S	*	●	10	10	15		75	5,00	2		
EMP11-010-G10-CV06-03C-S	*	○	10	10	15		75	5,00	3		
EMP11-010-G10-CV06-03C-M	*	●	10	10	22		80	5,00	3		
EMP11-010-G16-CV06-03C-L	*	●	10	16	30	24	90	5,00	3		
EMP11-012-G12-CV06-03C-S	*	○	12	12	15		75	5,00	3		
EMP11-012-G12-CV06-04C-S	*	○	12	12	15		75	5,00	4		
EMP11-012-G12-CV06-04C-M	*	●	12	12	22		80	5,00	4		
EMP11-012-G12-CV06-04C-L	*	○	12	12	30		100	5,00	4		
EMP11-014-G14-CV06-04C-S	*	●	14	14	15		75	5,00	4		
EMP11-014-G14-CV06-05C-S	*	○	14	14	15		75	5,00	5		
EMP11-014-G14-CV06-05C-M	*	●	14	14	22		90	5,00	5		
EMP11-014-G14-CV06-05C-L	*	●	14	14	35		120	5,00	5		
EMP11-016-G16-CV06-05C-S	*	○	16	16	25		100	5,00	5		
EMP11-016-G16-CV06-06C-S	*	○	16	16	25		100	5,00	6		
EMP11-016-G16-CV06-06C-M	*	●	16	16	30		120	5,00	6		
EMP11-016-G16-CV06-06C-L	*	○	16	16	40		140	5,00	6		

● Ex stock ○ On demand


* With internal cooling

Spare parts			
	Insert	CVMX0602**	
	ØD	6-16	
	Screw	I60M1.8*3.3TT (0,4 Nm)	
	Wrench (Insert)	WT06IP	

Milling Insert

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

CVMX	L	W	S	d
06 02	6,70	4,10	2,30	2,00

CV** milling insert				HC ¹ (CVD)	HC ¹ (PVD)	HT	HC ²	HW
	P				●			
	M				●			
	K	●						
	N				●			
	S				●			
	H							
ISO		bs	r	YBD252	YBG205H			
	CVMX0602XR-GM			●	●			

● Ex stock ○ On demand

HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

Programming radius

Insert	approx. R [mm]	Residual material
CVMX0602XR-GM	1.0 mm	0.12
CVMX0602XR-GM	1.2 mm	0.07


Application range

a _p [mm]	f _z [mm]
0.5	0.5–1.2

Milling Insert

- Ideal machining conditions
- Normal machining conditions
- Unfavourable machining conditions

CVMX	L	W	S	d
06 02	6,40	4,40	2,50	2,00

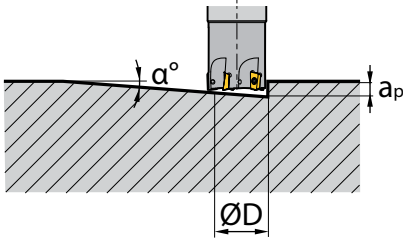
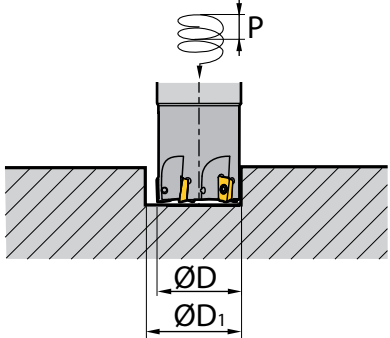
CV** milling insert				HC ¹ (CVD)	HC ¹ (PVD)	HT	HC ²	HW
	P				●			
	M				●			
	K	●						
	N				●			
	S				●			
	H							
ISO		bs	r	YBD252	YBG205H			
	CVMX060204PNR-GM	0,5	0,4	●	●			

● Ex stock ○ On demand

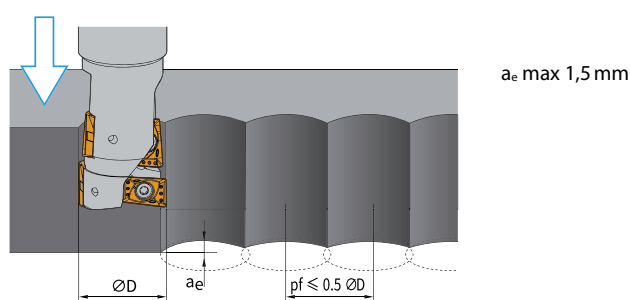
HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

Technical information

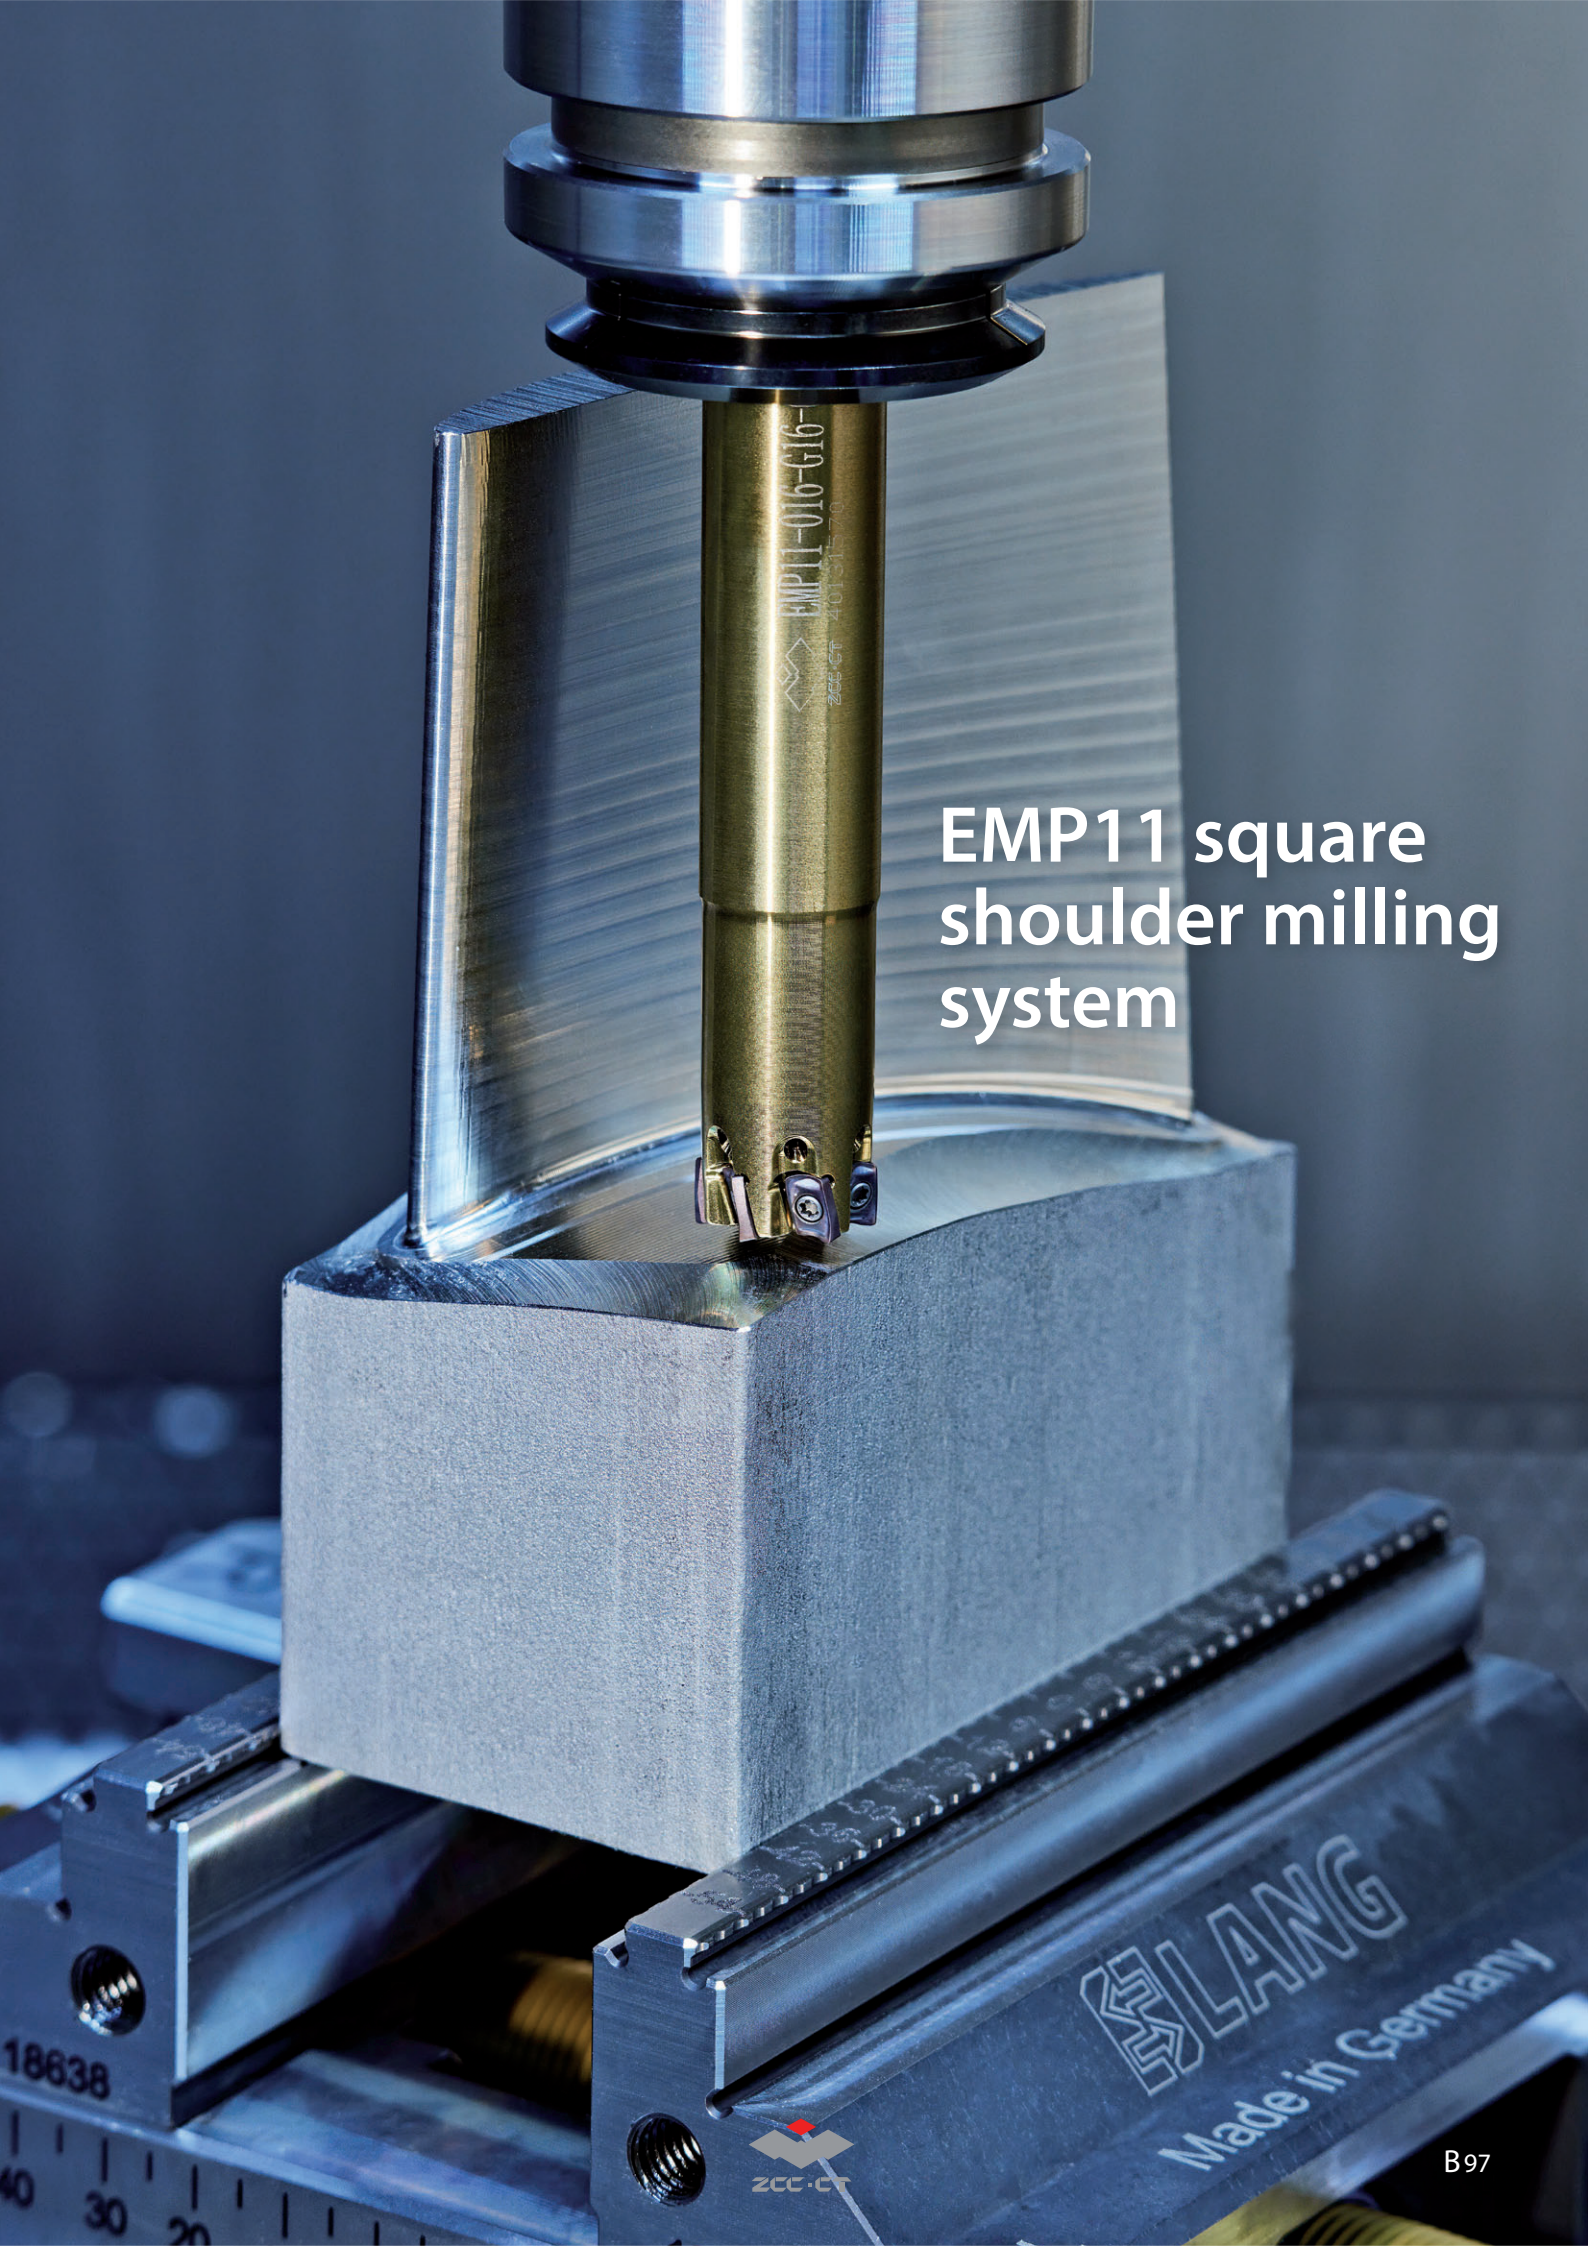
Insert CVMX

		Plunging / Ramping		Circular milling	
		 $L_m = \frac{a_p}{\tan \alpha}$ $\alpha : \text{Ramp angle}$		 $P = \tan \alpha \times \pi \times D_1$ $\alpha : \text{Helix angle}$	
Insert	Diameter ØD [mm]	Max. cutting depth ap [mm]	Max. ramp angle α°	Min. diameter ØD1 [mm]	Max. diameter [mm]
CVMX0602 XR-GM	8	0,5	1,0	12	14
	10	0,5	0,7	16	18
	12	0,5	0,55	20	22
	14	0,5	0,45	24	26
	16	0,6	0,5	28	30
CVMX060204 PNR-GM	8	5	2,0	14	15
	10	5	1,6	18	19
	12	5	1,3	22	23
	14	5	1,1	26	27
	16	5	0,9	30	31

Plunging



Reduce the feed rate when plunging and circular milling.
For drilling operations (axial) set the feed rate under 0.2 mm.
„Attention“ – drilling can form long chips.



A close-up photograph of a square shoulder milling operation. A multi-fluted, gold-colored milling cutter is shown in the process of machining a square metal workpiece. The workpiece is held in a dark grey metal vise. The background is a blurred industrial setting. The text 'EMP11 square shoulder milling system' is overlaid on the right side of the image.

EMP11 square shoulder milling system

Indexable milling – group 2 (FMA01/02/03/04, FME02/03/17, FMP01/02, EMP01/02/03/04/05/11/14)

Material group		Composition / structure / heat treatment		Brinell hardness HB	Machining group	Starting values for cutting speed v _c [m/min]								
						HC (CVD)								
						YBC302		YBC401		YBD152		YBD252		
						a _e / D		a _e / D		a _e / D		a _e / D		
		1/1 3/4	1/5	1/1 3/4	1/5	1/1 3/4	1/5	1/1 3/4	1/5	1/1 3/4	1/5			
P	Unalloyed steel	approx. 0,15 % C	annealed	125	1	245	285	210	245					
		approx. 0,45 % C	annealed	190	2	210	245	180	210					
		approx. 0,45 % C	tempered	250	3	200	230	170	200					
		approx. 0,75 % C	annealed	270	4	175	200	150	175					
		approx. 0,75 % C	tempered	300	5	160	190	140	160					
	Low-alloyed steel		annealed	180	6	210	245	180	210					
			tempered	275	7	175	200	150	175					
			tempered	300	8	160	190	140	160					
			tempered	350	9	135	160	120	135					
High-alloyed steel and high-alloyed tool steel		annealed	200	10	125	145	105	125						
		hardened and tempered	325	11	90	100	75	90						
M	Stainless steel	ferritic/martensitic	annealed	200	12									
		martensitic	tempered	240	13									
		austenitic	quench hardened	180	14									
		austenitic-ferritic		230	15									
K	Grey cast iron	perlitic/ferritic		180	16					315	365	270	315	
		perlitic (martensitic)		260	17					185	215	160	190	
	Cast iron with spheroidal graphite	ferritic		160	18					215	250	185	215	
		perlitic		250	19					145	170	125	145	
	Malleable cast iron	ferritic		130	20					260	300	225	260	
		perlitic		230	21					175	205	150	175	
N	Aluminium wrought alloys	cannot be hardened		60	22									
		hardenable	hardened	100	23									
	Cast aluminium alloys	≤ 12 % Si, cannot be hardened		75	24									
		≤ 12 % Si, hardenable	hardened	90	25									
		> 12 % Si, cannot be hardened		130	26									
	Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27									
		CuZn, CuSnZn		90	28									
CuSn, Pb-free copper, electrolytic copper		100	29											
S	Heat-resistant alloys	Fe-based alloys	annealed	200	30									
			hardened	280	31									
		Ni or Co bass	annealed	250	32									
			hardened	350	33									
			cast	320	34									
	Titanium alloys	pure titanium		R _m 400	35									
		α and β alloys	hardened	R _m 1050	36									
H	Hardened steel		hardened and tempered	55 HRC	37									
			hardened and tempered	60 HRC	38									
	Hard cast iron		cast	400	39									
	Hardened cast iron		hardened and tempered	55 HRC	40									
X	Non-metallic materials	Thermoplasts			41									
		Thermosetting plastics			42									
		Plastic, glass-fibre reinforced GFRP			43									
		Plastic, carbon fibre reinforced CFRP			44									
		Graphite			45									
		Wood			46									

Note: The given cutting values are guide values, which were determined under ideal conditions.
 The values have to be adapted in individual cases.
 Feed rate recommendations on page B338.
 For examples of material for cutting tool groups view page D11.

HC	Coated carbide
HT	Uncoated carbide, primary component (TiC) or (TiN), cermet
HW	Uncoated carbide, primary component (WC)
BL	Cubic boron nitride with low BN content
BH	Cubic boron nitride with high BN content
CN	Si ₃ N ₄ ceramic
CM	Mixed ceramic
HC ₁	Coated cermet
BC	CBN with coating
CC	Coated cutting ceramic
CR	Cutting ceramic, primary component aluminium oxide (Al ₂ O ₃), reinforced
DP	Polycrystalline diamond

E

Recommended feed rate

Indexable milling – group 2 (FMA01/02/03/04, FME02/03/17, FMP01/02, EMP01/02/03/04/05/11/14)

Material group		Feed rate per cutting edge [mm]																		
		FMA01 FMA02			FMA03			FMA03			FMA04			FMA04			FMA04			
		SEET12			SEKN12			SEKN15			OFKT05			OFKR07			ODHT06			
		Application																		
		F	M	R	F	M	R	F	M	R	F	M	R	F	M	R	F	M	R	
P	Unalloyed steel	0,15	0,20	0,25		0,18			0,20		0,20	0,25		0,20	0,25		0,20	0,25		
	Low-alloyed steel	0,14	0,19	0,23		0,17			0,19		0,19	0,23		0,19	0,23		0,19	0,23		
	High-alloyed steel and high-alloyed tool steel	0,13	0,18	0,22		0,16			0,18		0,18	0,22		0,18	0,22		0,18	0,22		
M	Stainless steel	0,11	0,14	0,18		0,13			0,14		0,14	0,18		0,14	0,18		0,14	0,18		
K	Grey cast iron	0,17	0,22	0,28		0,20			0,22		0,22	0,28		0,22	0,28		0,22	0,28		
	Cast iron with spheroidal graphite	0,15	0,20	0,25		0,18			0,20		0,20	0,25		0,20	0,25		0,20	0,25		
	Malleable cast iron	0,15	0,20	0,25		0,18			0,20		0,20	0,25		0,20	0,25		0,20	0,25		
N	Aluminium wrought alloys	0,13	0,17	0,21							0,17	0,21		0,17	0,21		0,17	0,21		
	Aluminum cast alloys	0,13	0,17	0,21							0,17	0,21		0,17	0,21		0,17	0,21		
	Copper and copper alloys (bronze/brass)	0,11	0,15	0,19							0,15	0,19		0,15	0,19		0,15	0,19		
S	Heat-resistant alloys	0,11	0,14	0,18							0,14	0,18		0,14	0,18		0,14	0,18		
	Titanium alloys	0,11	0,14	0,18							0,14	0,18		0,14	0,18		0,14	0,18		
H	Hardened steel																			
	Hard cast iron																			
	Hardened cast iron																			
X	Non-metallic materials																			

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Indexable milling – group 2 (FMA01/02/03/04, FME02/03/17, FMP01/02, EMP01/02/03/04/05/11/14)

Material group		Feed rate per cutting edge [mm]																			
		EMP03 EMP04			EMP05			EMP11			EMP14										
		APKT11			ADKT**			CVMX060204-PNR			VPGT22										
		F	M	R	F	M	R	F	M	R	F	M	R								
P	Unalloyed steel	0,12	0,17	0,23	0,10	0,15	0,20		0,12												
	Low-alloyed steel	0,11	0,16	0,21	0,09	0,14	0,19		0,11												
	High-alloyed steel and high-alloyed tool steel	0,10	0,15	0,20	0,09	0,13	0,18		0,10												
M	Stainless steel	0,08	0,12	0,16	0,07	0,11	0,14		0,08												
K	Grey cast iron	0,13	0,19	0,25	0,11	0,17	0,22		0,13												
	Cast iron with spheroidal graphite	0,12	0,17	0,23	0,10	0,15	0,20		0,12												
	Malleable cast iron	0,12	0,17	0,23	0,10	0,15	0,20		0,12												
N	Aluminium wrought alloys	0,10	0,15	0,20	0,09	0,13	0,17		0,10		0,05	0,2	0,3								
	Aluminum cast alloys	0,10	0,15	0,20	0,09	0,13	0,17		0,10		0,05	0,2	0,3								
	Copper and copper alloys (bronze/brass)	0,09	0,13	0,18	0,08	0,11	0,15		0,09		0,05	0,2	0,3								
S	Heat-resistant alloys																				
	Titanium alloys																				
H	Hardened steel																				
	Hard cast iron																				
	Hardened cast iron																				
X	Non-metallic materials																				

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

F	Finishing
M	Medium machining
R	Roughing

F	Finishing
M	Medium machining
R	Roughing

F	Finishing
M	Medium machining
R	Roughing

F	Finishing
M	Medium machining
R	Roughing



PANGU

PGMS series

Solid carbide milling

System code – PGMS series

 PANGU PGMS series

B104

B105–B106

B

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

PGMS – 4 BC 15 – (D12.0) R150

1

2

3

4

5

6

Series

Number of teeth

Cutting edge type

Code

Description

BT

Tapered ball end mill

BC

Conical barrel cutter

1

2

3

Cutting angle

Shank diameter [mm]

Radius [mm]

4

5

6



a Groove milling b Square shoulder milling c Profile milling d Slot milling e Face milling f Chamfer milling g Plunge milling h Circular milling/Ramping

The ideal choice for complex contours

Now also available as a barrel cutter 

YOUR BENEFITS

- **Greater flexibility** thanks to conical barrel cutters
- Curved cutting edge for time savings of **up to 90% compared with ball nose cutters**
- **Flawless surface quality** made possible by low-vibration machining
- **Shorter process times** thanks to enhanced tool geometry
- **Extremely long tool life** when machining HRSA and titanium thanks to customised cutting edge geometry

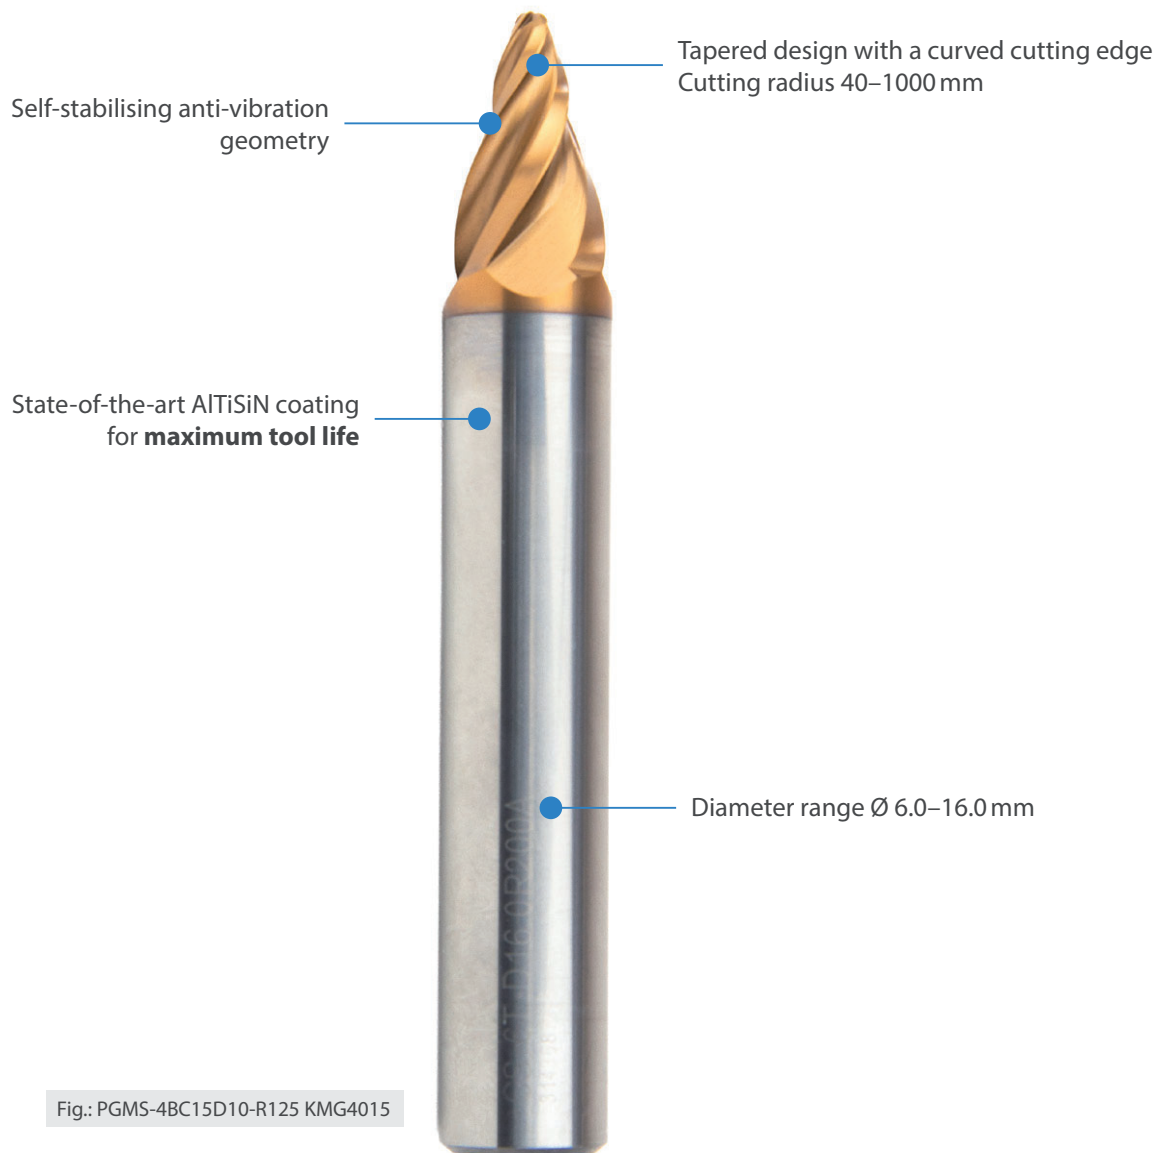


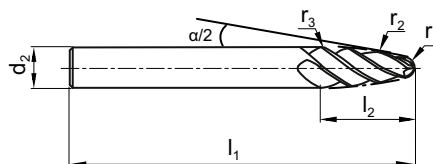
Fig.: PGMS-4BC15D10-R125 KMG4015

Barrel cutters

High-performance machining

PGMS-4BC

- Straight shank
- Centre cutting
- Conical cutter



Article	*	Dimensions [mm]								Grade
		d_2 (h_5)	$\alpha/2$	r_1	r_2	r_3	l_1	l_2	z	
PGMS-4BC15D6-R40		6	15°	1,0	40	3	55	8	4	●
PGMS-4BC15D6-R80		6	15°	1,0	80	3	55	8	4	○
PGMS-4BC15D6-R150		6	15°	1,0	150	3	55	8	4	●
PGMS-4BC15D8-R50		8	15°	1,0	50	4	64	12	4	●
PGMS-4BC15D8-R100		8	15°	1,0	100	4	64	12	4	○
PGMS-4BC15D8-R250		8	15°	1,0	250	4	64	12	4	●
PGMS-4BC15D10-R65		10	15°	1,0	65	5	80	16	4	●
PGMS-4BC15D10-R125		10	15°	1,0	125	5	80	16	4	○
PGMS-4BC15D10-R300		10	15°	1,0	300	5	80	16	4	●
PGMS-4BC15D12-R70		12	15°	1,5	70	6	90	18	4	●
PGMS-4BC15D12-R150		12	15°	1,5	150	6	90	18	4	○
PGMS-4BC15D12-R300		12	15°	1,5	300	6	90	18	4	●
PGMS-4BC15D16-R75		16	15°	2,0	75	8	108	24	4	●
PGMS-4BC15D16-R200		16	15°	2,0	200	8	108	25	4	○
PGMS-4BC15D16-R500		16	15°	2,0	500	8	108	25	4	●
PGMS-4BC15D16-R1000		16	15°	2,0	1000	8	108	25	4	●

● Ex stock ○ On demand

* With inner cooling

Application fields

P	M	K	N	S	H
✓	✓	✓	✓	✓	

✓ Very suitable

✓ Suitable

Indexable drilling

ISO code – Inserts

 PANGU PG1030 grade

C108

C109–C110

C

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

W C M X 08 04 12 R – PG

1

2

3

4

5


6

7

8


9

Insert shape




1

Clearance angle



2

Tolerance class



Code	I.C [mm]	m [mm]	S [mm]
G	±0,025	±0,025	±0,130
M	±0,05–0,13	±0,08–0,18	±0,130

3

Fastening features (metric)

Insert shape



X Special

4

Cutting edge length l [mm]

I.C [mm]	Insert shape	
	S	W
3,8		03
4,3		04
5,4		05
6,35	06	
6,5		06
8,0		08
8,7	08	
9,252	09	
12,7	12	

5


Insert thickness S [mm]



Code	S	Code	S
00	0,79	05	5,56
T0	0,99	T5	5,95
01	1,59	06	6,35
T1	1,98	T6	6,75
02	2,38	07	7,94
T2	2,58	09	9,52
03	3,18	T9	9,72
T3	3,97	11	11,11
04	4,76	12	12,70
T4	4,96		

6

Nose radius r [mm]



Code	r
04	0,4
08	0,8
12	1,2

7

Rotation direction

Code	Description
R	Right
L	Left

8

Chip breaker overview (on page C3)

9

PG1030 grade

High-performance grade for drilling in steel

YOUR BENEFITS

- New grade with **double the tool life** when machining steel compared with older grades
- An outstanding combination of **high wear resistance, excellent toughness and high thermal resistance**
- For greater process reliability and **longer tool life**

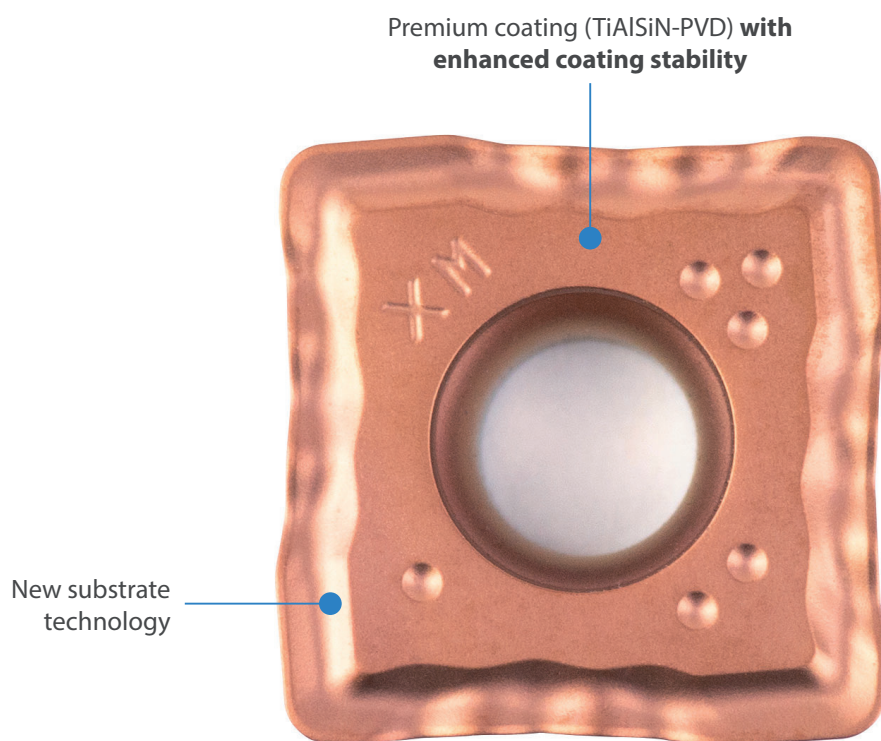
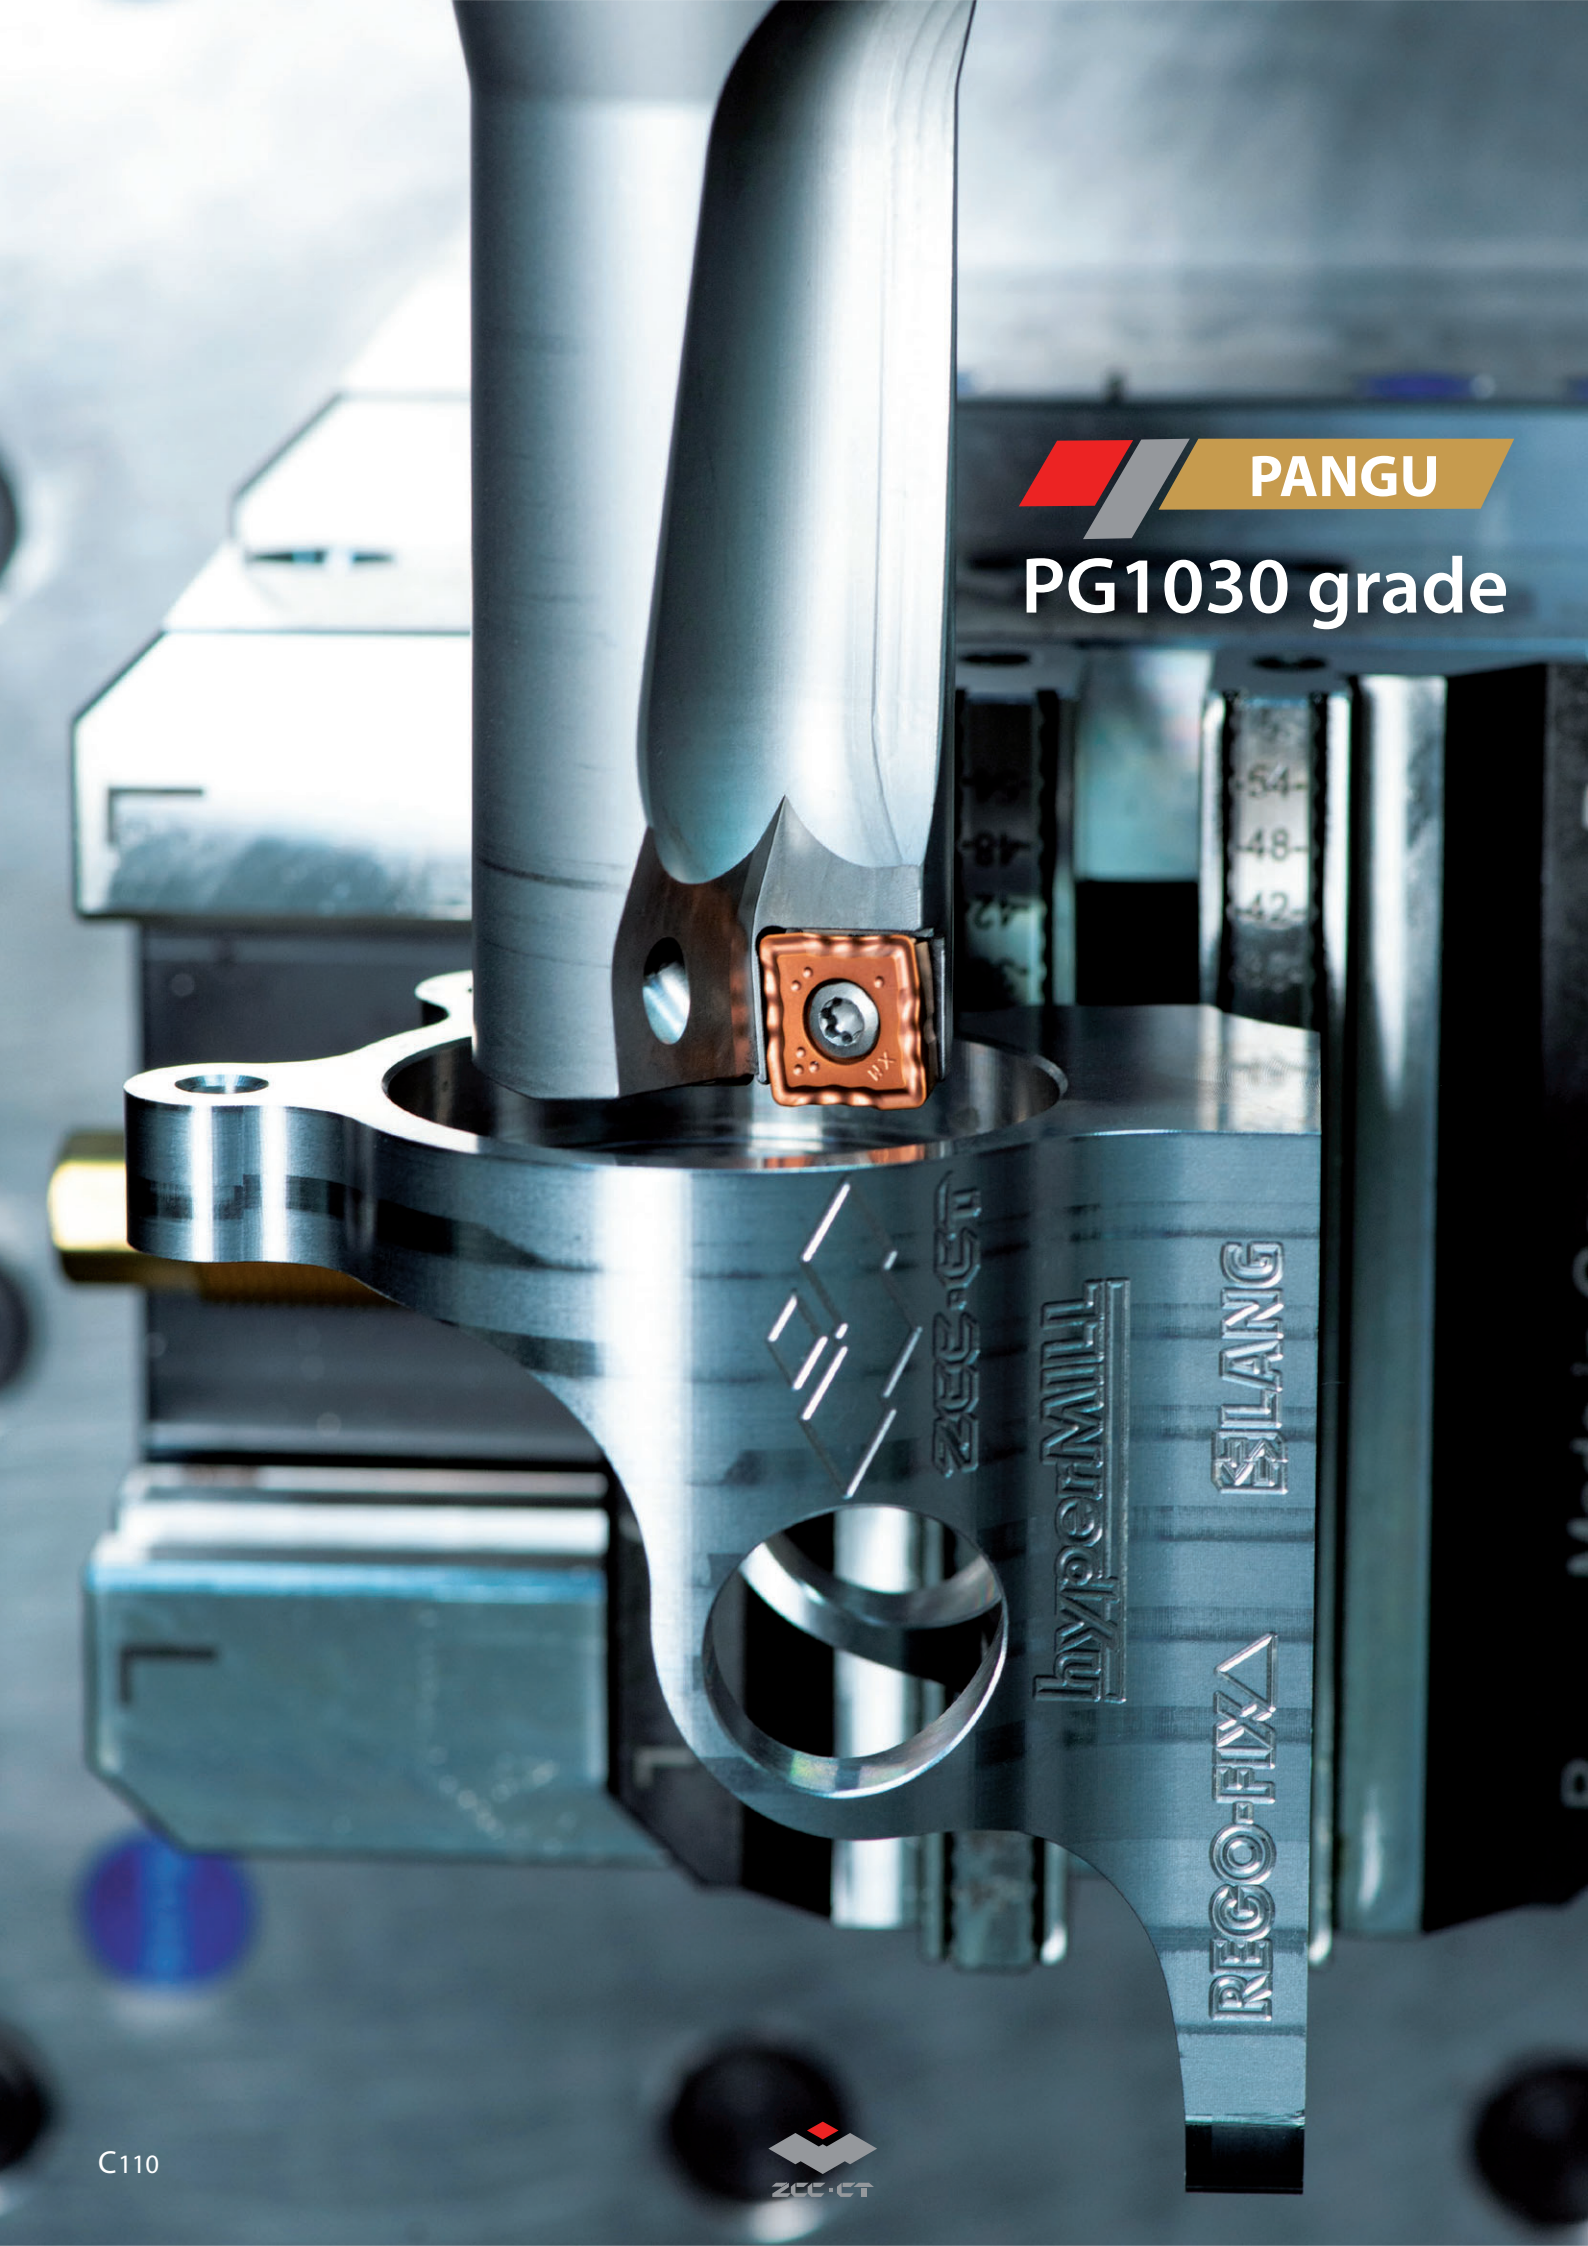


Fig.: SPMX140512-XM PG1030

Articles available with the new PG1030 grade:

Article	Stock	Drilling system
SPMX050204-XM PG1030	●	ZSD
SPMX060204-LM PG1030	●	ZSD
SPMX060204-XM PG1030	●	ZSD
SPMX07T308-XM PG1030	●	ZSD
SPMX090408-XM PG1030	●	ZSD
SPMX110408-XM PG1030	○	ZSD
SPMX140512-XM PG1030	○	ZSD

● Ex stock ○ On demand



PANGU
PG1030 grade

Solid carbide drills

System code – solid carbide drills
UL series

C112–C113
C114–C119

C

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

1 5 3 6 SU 05 (C) – 0850 (S)

1

2

3

4

5

6

7

8

9

Type	
Code	Description
1	Drills

1

Shank type	
Code	Description
1	Straight shank
2	Square shank DIN 10
3	Double flattened straight shank DIN 1809
5	Straight shank DIN 6535 HA
6	Weldon shank DIN 6535 HB
7	Whistle Notch shank DIN 6535 HE
9	Morse taper shank

2

Drill type	
Code	Description
0	Twist drill
3	Universal twist drill
4	NC tapping device
5	Step drill
6	Three-lips drill
7	Straight flute drill
8	Deep hole drill

3

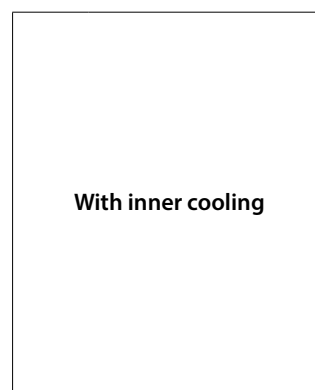
Tool length	
Code	Description
1	DIN 338
2	DIN 1897
3	QJ/ZZQ(TO)01.001.002
4	DIN 6537 K
5	DIN 6539
6	DIN 6537 L
7	Factory standard ZCC-C
8	Factory standard ZCC-D
9	Factory standard ZCC-E

4

Application	
Code	Description
UD	Twist drills for tough materials
UL	Deep hole drills for difficult-to-machine materials
GD	Twist drills for high feeds
SU	Twist drill for general machining
SL	Twist drill for deep hole drilling
SP	Pilot drill
SH	Twist drill for hardened materials
SC	Twist drill for non-ferrous metals and cast iron

5

L/D relation		Angle	
Drill		NC tapping device	
Code	Description	Code	Description
03	3xD	90	90°
05	5xD	120	120°
08	8xD		
10	10xD		
12	12xD		
15	15xD		
20	20xD		
30	30xD		

6


With inner cooling

7

Bore diameter [mm]	
Code	Description
0200	2,0
0850	8,5
1800	18,0
...	

8

Shank diameter [mm]	
Code	Description
S	4,0

9
A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index



a Boring



b Drilling



c Profile drilling



d Centering

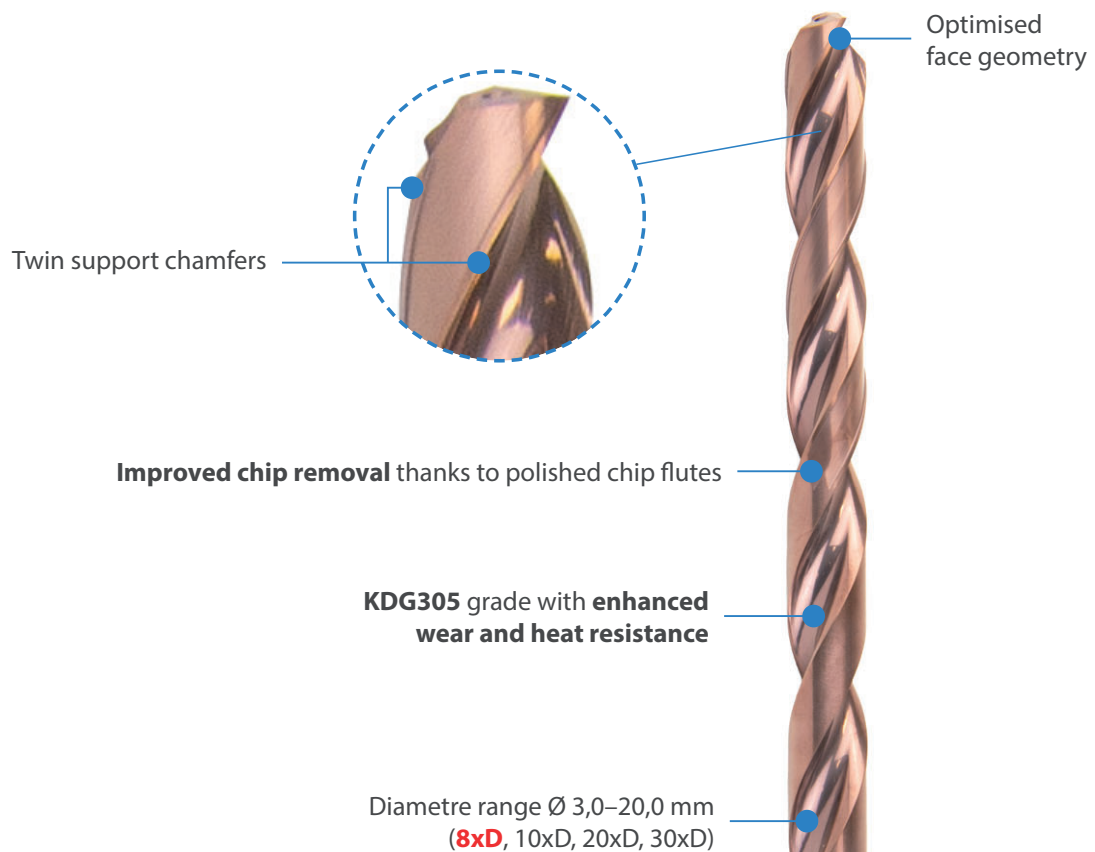
UL series

Solid carbide deep hole drills for difficult-to-machine materials

Now also available with 8xD effective length **New**

YOUR BENEFITS

- **Reduced cutting forces** thanks to new cutting edge design
- Larger clearance angle **for higher productivity**
- Enhanced chip breaking for **optimal process reliability**
- **Enhanced tool guidance** thank to four support chamfers



Feed calculator

ISO group	Material	Cutting speed v_c (m/min)	Feed factor F_m
M	Stainless steels	65	0,02
S	Ni- / Co-based alloys	30	0,01
S	Titanium alloys	50	0,012

Formula: feed per revolution (F_n) $D \times F_m$
Example: drill diameter (D) 10 mm
material stainless steel

$$F_n = 10 \text{ mm} \times 0,02 = 0,2 \text{ mm/r}$$

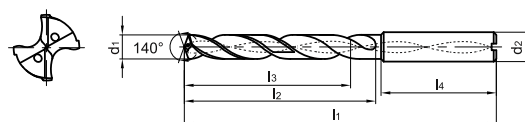
Fig.: 1588UL08C-1000 KDG305

UL drill 08xD**General machining****1538UL08C**

- Type of shank: DIN 6535HA
- Coolant exit, axial concentric



Internal cooling



Article	*	Dimensions [mm]						Grade
		d ₁ (m7)	d ₂ (h6)	l ₁	l ₂	l ₃	l ₄	KDG305
1538UL08C-0300	*	3	6	72	34	29	36	●
1538UL08C-0310	*	3,1	6	72	34	29	36	○
1538UL08C-03175	*	3,175	6	72	34	29	36	○
1538UL08C-0320	*	3,2	6	72	34	29	36	●
1538UL08C-0330	*	3,3	6	72	34	29	36	●
1538UL08C-0340	*	3,4	6	72	34	29	36	●
1538UL08C-0350	*	3,5	6	72	34	29	36	●
1538UL08C-0360	*	3,6	6	72	34	29	36	○
1538UL08C-0370	*	3,7	6	72	34	29	36	○
1538UL08C-0380	*	3,8	6	81	43	36	36	○
1538UL08C-0390	*	3,9	6	81	43	36	36	○
1538UL08C-0400	*	4	6	81	43	36	36	●
1538UL08C-0410	*	4,1	6	81	43	36	36	○
1538UL08C-0420	*	4,2	6	81	43	36	36	●
1538UL08C-0430	*	4,3	6	81	43	36	36	●
1538UL08C-0440	*	4,4	6	81	43	36	36	○
1538UL08C-0450	*	4,5	6	81	43	36	36	●
1538UL08C-0460	*	4,6	6	81	43	36	36	○
1538UL08C-0470	*	4,7	6	81	43	36	36	○
1538UL08C-0480	*	4,8	6	95	57	48	36	●
1538UL08C-0490	*	4,9	6	95	57	48	36	○
1538UL08C-0500	*	5	6	95	57	48	36	●
1538UL08C-0510	*	5,1	6	95	57	48	36	●
1538UL08C-0520	*	5,2	6	95	57	48	36	●
1538UL08C-0530	*	5,3	6	95	57	48	36	●
1538UL08C-0540	*	5,4	6	95	57	48	36	○
1538UL08C-0550	*	5,5	6	95	57	48	36	●
1538UL08C-0560	*	5,6	6	95	57	48	36	○
1538UL08C-0570	*	5,7	6	95	57	48	36	○
1538UL08C-0580	*	5,8	6	95	57	48	36	●
1538UL08C-0590	*	5,9	6	95	57	48	36	○
1538UL08C-0600	*	6	6	95	57	48	36	●
1538UL08C-0610	*	6,1	8	114	76	66	36	○
1538UL08C-0620	*	6,2	8	114	76	66	36	○
1538UL08C-0630	*	6,3	8	114	76	66	36	○
1538UL08C-0635	*	6,35	8	114	76	66	36	○
1538UL08C-0640	*	6,4	8	114	76	66	36	○

● Ex stock ○ On demand

* With internal cooling

Application field

P	M	K	N	S	H
✓	✓			✓	

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

DTechnical
Information**E**

Index

UL drill 08xD

General machining

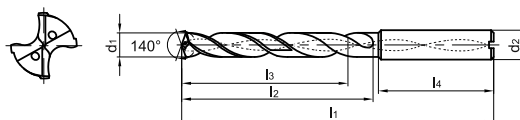
1538UL08C



- Type of shank: DIN 6535HA
- Coolant exit, axial concentric



Internal cooling



Article	*	Dimensions [mm]						Grade
		d ₁ (m7)	d ₂ (h6)	l ₁	l ₂	l ₃	l ₄	KDG305
1538UL08C-0650		6,5	8	114	76	66	36	●
1538UL08C-0660		6,6	8	114	76	66	36	○
1538UL08C-0670		6,7	8	114	76	66	36	○
1538UL08C-0680		6,8	8	114	76	66	36	●
1538UL08C-0690		6,9	8	114	76	66	36	●
1538UL08C-0700		7	8	116	76	66	36	●
1538UL08C-0710		7,1	8	116	76	66	36	○
1538UL08C-0720		7,2	8	116	76	66	36	○
1538UL08C-0730		7,3	8	116	76	66	36	○
1538UL08C-0740		7,4	8	116	76	66	36	○
1538UL08C-0750		7,5	8	116	76	66	36	●
1538UL08C-0760		7,6	8	116	76	66	36	○
1538UL08C-0770		7,7	8	116	76	66	36	○
1538UL08C-0780		7,8	8	116	76	66	36	●
1538UL08C-0790		7,9	8	116	76	66	36	○
1538UL08C-0800		8	8	116	76	66	36	●
1538UL08C-0810		8,1	10	142	95	83	40	●
1538UL08C-0820		8,2	10	142	95	83	40	○
1538UL08C-0830		8,3	10	142	95	83	40	○
1538UL08C-0840		8,4	10	142	95	83	40	○
1538UL08C-0850		8,5	10	142	95	83	40	●
1538UL08C-0860		8,6	10	142	95	83	40	○
1538UL08C-0870		8,7	10	142	95	83	40	○
1538UL08C-0880		8,8	10	142	95	83	40	●
1538UL08C-0890		8,9	10	142	95	83	40	○
1538UL08C-0900		9	10	142	95	83	40	●
1538UL08C-0910		9,1	10	142	95	83	40	○
1538UL08C-0920		9,2	10	142	95	83	40	○
1538UL08C-0930		9,3	10	142	95	83	40	○
1538UL08C-0940		9,4	10	142	95	83	40	○
1538UL08C-0950		9,5	10	142	95	83	40	●
1538UL08C-0960		9,6	10	142	95	83	40	○
1538UL08C-0970		9,7	10	142	95	83	40	○
1538UL08C-0980		9,8	10	142	95	83	40	○
1538UL08C-0990		9,9	10	142	95	83	40	○
1538UL08C-1000		10	10	142	95	83	40	●
1538UL08C-1010		10,1	12	162	114	99	45	○

● Ex stock ○ On demand

* With internal cooling

Application field

P	M	K	N	S	H
✓	✓			✓	

✓ Very suitable

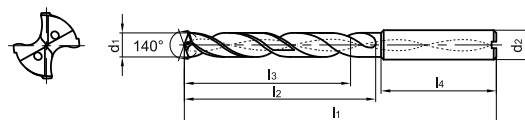
✓ Suitable

UL drill 08xD
General machining
1538UL08C


- Type of shank: DIN 6535HA
- Coolant exit, axial concentric



Internal cooling



Article	*	Dimensions [mm]						Grade
		d ₁ (m7)	d ₂ (h6)	l ₁	l ₂	l ₃	l ₄	KDG305
1538UL08C-1020		10,2	12	162	114	99	45	●
1538UL08C-1030		10,3	12	162	114	99	45	○
1538UL08C-1040		10,4	12	162	114	99	45	○
1538UL08C-1050		10,5	12	162	114	99	45	●
1538UL08C-1060		10,6	12	162	114	99	45	○
1538UL08C-1070		10,7	12	162	114	99	45	○
1538UL08C-1080		10,8	12	162	114	99	45	○
1538UL08C-1090		10,9	12	162	114	99	45	○
1538UL08C-1100		11	12	162	114	99	45	●
1538UL08C-1110		11,1	12	162	114	99	45	○
1538UL08C-1120		11,2	12	162	114	99	45	○
1538UL08C-1130		11,3	12	162	114	99	45	○
1538UL08C-1140		11,4	12	162	114	99	45	○
1538UL08C-1150		11,5	12	162	114	99	45	●
1538UL08C-1160		11,6	12	162	114	99	45	○
1538UL08C-1170		11,7	12	162	114	99	45	○
1538UL08C-1180		11,8	12	162	114	99	45	○
1538UL08C-1190		11,9	12	162	114	99	45	○
1538UL08C-1200		12	12	162	114	99	45	●
1538UL08C-1250		12,5	14	178	133	116	45	○
1538UL08C-1300		13	14	178	133	116	45	●
1538UL08C-1350		13,5	14	178	133	116	45	○
1538UL08C-1400		14	14	178	133	116	45	●
1538UL08C-1450		14,5	16	204	152	132	48	○
1538UL08C-1500		15	16	204	152	132	48	●
1538UL08C-1550		15,5	16	204	152	132	48	○
1538UL08C-1600		16	16	204	152	132	48	●
1538UL08C-1650		16,5	18	223	171	149	48	○
1538UL08C-1700		17	18	223	171	149	48	○
1538UL08C-1750		17,5	18	223	171	149	48	○
1538UL08C-1800		18	18	223	171	149	48	○
1538UL08C-1850		18,5	20	244	190	160	50	○
1538UL08C-1900		19	20	244	190	160	50	○
1538UL08C-1950		19,5	20	244	190	160	50	○
1538UL08C-2000		20	20	244	190	160	50	○

● Ex stock ○ On demand

* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓			✓	

✓ Very suitable

✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

UL series

REGO-FIX

SLANG

R

Made in Germany

R

[illegible]

Turning

Milling

Drilling

Technical Information

Index



Go to PDF online



739 | PNK | v1.0 | 4.1 | 09.26

European Headquarters

ZCC Cutting Tools Europe GmbH

www.zccct-europe.com

Wanheimer Str. 57, 40472 Düsseldorf, Germany

Tel.: +49 (0)211-989240-0

Fax: +49 (0)211-989240-111

E-mail: info@zccct-europe.com

Branch Office France

ZCC Cutting Tools Europe GmbH

Succursale Française

www.zccct-europe.com

14, Allée Charles Pathé, 18000 Bourges, France

Tel.: +33 (0)2 45 41 01 40

Fax: +33 (0)800 74 27 27

E-mail: ventes@zccct-europe.com

Branch Office Italy

ZCC Cutting Tools Europe GmbH

Italy Branch

www.zccct-europe.com

Via Giuseppe di Vittorio 24

20068 Peschiera Borromeo (Milano), Italia

Tel.: +49 (0) 211-989240-390

E-mail: infoit@zccct-europe.com

Branch Office UK

ZCC Cutting Tools Europe GmbH

UK Division

www.zccct-europe.com

4200 Waterside Centre, Solihull Parkway,
Birmingham Business Park.

Birmingham, West Midlands, B37 7YN, UK

Tel.: +49 (0) 211-989240-360

E-mail: infouk@zccct-europe.com



© Copyright by ZCC Cutting Tools Europe GmbH

All rights reserved. All descriptions and pictures are protected by copyright. Usage, modification and reproduction, completely or partially, without written permission are prohibited. Subject to technical changes and changes of the delivery program. Mistakes and printing errors are reserved.